



Conformable TactArray

High Performance, Flexible Sensors for
Contact Pressure Distribution Mapping


INTRODUCTION AND PRODUCT OVERVIEW

TactArray Systems capture pressure distribution between two objects in direct physical contact. By placing TactArray sensors between objects, wrapping them around shapes, or applying them to a flat surface, product developers and researchers can measure and visualize pressure information in their applications.

PPS's **Conformable TactArray (CTA) Systems** are the only soft and flexible pressure sensor on the market offering high sensor performance on multi-curved surfaces.

The system comprises a sensor, the electronics and visualization software (sold separately). The conformable sensor is constructed from soft and flexible conductive cloth that captures pressure changes as low as 10 Pa with high accuracy, even when wrapped around complex geometries.

Available in a wide range of size configurations, pressure ranges, and resolutions for your custom application.

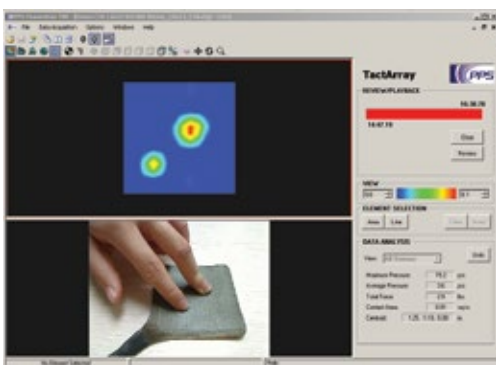

KEY BENEFITS

- + High-resolution even around complex shapes
- + High sensitivity and repeatability for consistent capture of accurate data
- + Improve results due to increased accuracy and reduced recalibration time
- + Provides real-time feedback during design processes

KEY FEATURES

- + High spatial resolution (2 mm)
- + Cloth-based construction
- + Thin construction (< 1.0 mm thick)
- + Can be used in temperatures between -20°C and 85°C
- + Captures pressures as low as 0.0015 psi (10 Pa, 0.001 N/cm²)
- + Can be built in wide range of active areas (64x64 mm to 320x320 mm)

SOFTWARE

The Chameleon Tactile Visualization and Recording (TVR) software¹ captures and records live data to provide both numeric and visual representation of contact pressures.



APPLICATIONS

As a standalone sensor, the CTA can accommodate simple curvatures. In this format, the cloth-like surface of the CTA is suitable for human skin contact and often integrated into a stretchable cloth band or a mask.

For compound or complex substrates, the sensor can be custom-built (molded onto) the complex surface without compromising data quality.

Example Applications:

- + Measuring contact pressures between wearable devices and the human body
- + Very low pressure applications such as compression stockings
- + Comfort and fit assessment of helmets, goggles, glasses, VR/AR equipment



CTA's are flexible and can be molded over complex shapes like a head

¹PPS grants to Buyer non-exclusive license to use the software supplied with PPS systems. This license is not a sale. Buyer shall not reproduce, distribute, or modify PPS software source code. Buyer shall only be allowed to install the software on one PC. Buyer may not reverse engineer, de-compile, or disassemble the software, nor attempt in any other manner to obtain the source code. PPS retains title, ownership and intellectual property rights in and to the Software and all subsequent copies regardless of the form or media.

SYSTEM COMPONENTS


- ① Conformable TactArray Sensor
- ② T4500 signal conditioning electronics with USB 2.0

Optional accessories include a USB webcam and the API




SENSOR MODELS & METRICS

Active Area Sizes



units mm. *Not to scale

Array Sizes



units number of sensor elements

CTA Sensors are available in square, rectangular and other geometries with varying active areas, resolutions, and array sizes (see left). Individual sensor elements in the arrays vary in size from 2x2 mm to 10x10 mm.

Please visit the PPS catalog online to view all sensor configurations and specifications, or contact us for a custom inquiry.

Sensor Characteristics & Performance*

Full Scale Range	2-80 psi
Thickness	< 1 mm (< 0.04 in)
Signal-to-Noise (SNR)	> 500:1
Minimum Sensitivity	10 Pa (0.0015 psi)
Linearity	99.8%
Gain Non-Repeatability	0.35%
Weight	~ 1.5 lbs (650 g)

Electronic Specifications

Sampling Rate	7-10 KHz, element to element
Interconnect	USB 2.0
ADC Resolution	12 bit
Input Voltage / Power	5 V / 2 W
Operating Temperature	-20 °C to 100 °C
Cable Length	59 in (1.5 m)

*Performance numbers are for typical system response.

CONTACT US

For sales inquiries, please visit: pps.us/contact

US: +1 310 641 8100

UK: +44 141 559 7150

Korea: +82 2 2622 8555

China: +86 138 2883 2372

Japan: +81 3 6907 9105