

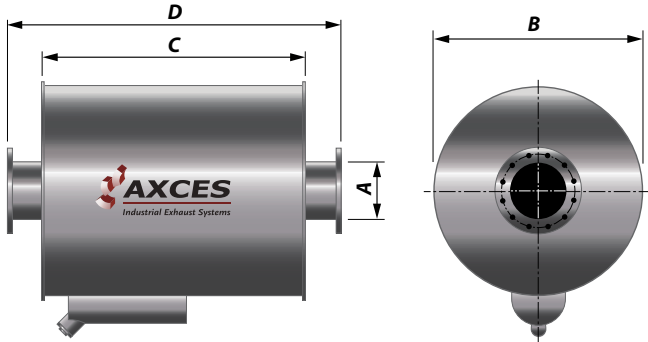


## TYPE ACR-IS

Damping level 25 dB(A)  
with integrated Spark Arrestor



Article No.	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
170200000020	2	50	60.3	206	215	300	10
170200000025	2.5	60	76.1	306	320	420	14
170200000030	3	80	88.9	306	320	420	20
170200000040	4	100	114.3	356	390	540	25
170200000050	5	125	139.7	401	535	650	30
170200000060	6	150	168.3	482	606	750	40
170200000080	8	200	219.1	556	756	900	50
170200000100	10	250	273.0	708	856	1000	60
170200000120	12	300	323.9	800	1006	1200	70
170200000140	14	350	355.6	908	1256	1500	100
170200000160	16	400	406.4	1060	1408	1600	160
170200000180	18	450	457.2	1212	1510	1700	200
170200000200	20	500	508.0	1312	1810	2000	250

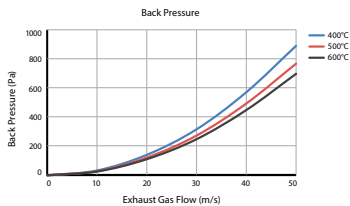

**Damping Of The Noise Level**  $\pm 25$  dB(A).

**Damping Basics** of the silencers type ACR-IS are according to the reflection absorption principal.

**Spark Arrestor** The silencers type ACR-IS are including an integrated Spark Arrestor.

**Mounting** The silencers type ACR-IS can be installed both horizontal and vertical.

**Exhaust Gas Speed** Advised Exhaust Gas Speed between 20-50 m/s.

**Material** Silencers type ACR-IS are produced out of Steel 37-2 (S235JRG2).

**Temperature** Maximum allowable temperature is 600°C.

**Custom Made** Axces silencers are also manufactured based on specific dimensions or client's requirements.