



## TYPE AOR 35

Damping level 35 dB(A)  
without integrated Spark Arrestor

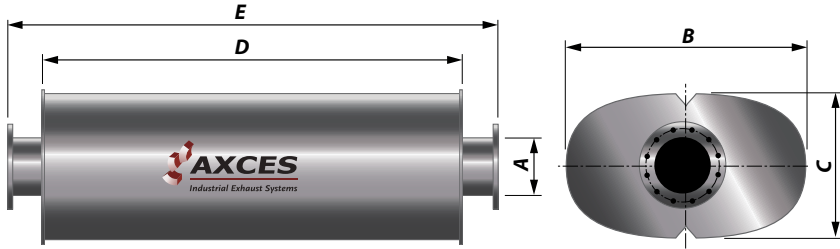

Article No.	A (inch)	NB (mm)	Pipe (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Weight (kg)
180100000020	2	50	60.3	280	150	750	900	20
180100000025	2.5	60	76.1	350	180	850	1000	30
180100000030	3	80	88.9	420	220	850	1000	40
180100000040	4	100	114.3	480	240	1270	1500	60
180100000050	5	125	139.7	535	270	1270	1500	80
180100000060	6	150	168.3	635	320	1500	1750	150
180100000080	8	200	219.1	750	375	1750	2000	200
180100000100	10	250	273.0	850	425	2250	2500	180
180100000120	12	300	323.9	1000	510	2500	2750	360
180100000140	14	350	355.6	1065	535	2750	3000	450
180100000160	16	400	406.4	1150	570	3000	3250	550
180100000180	18	450	457.2	1210	610	3250	3500	625
180100000200	20	500	508.0	1275	640	3500	3750	700

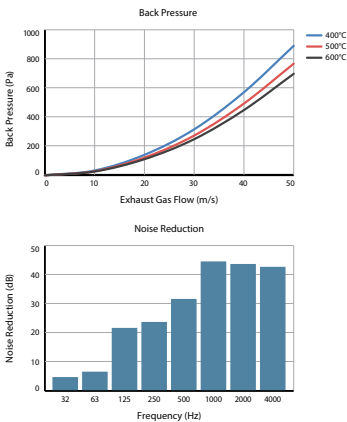

**Damping Of The Noise Level**  $\pm 35$  dB(A).

**Damping Basics** of the silencers type AOR35 are according to the reflection absorption principal.

**Spark Arrestor** The silencers type AOR35 are excluding an integrated Spark Arrestor.

**Mounting** The silencers type AOR35 can be installed both horizontal and vertical.

**Exhaust Gas Speed** Advised Exhaust Gas Speed between 20-50 m/s.

**Material** Silencers type AOR35 are produced out of Steel 37-2 (S235JRG2).

**Temperature** Maximum allowable temperature is 600°C.

**Custom Made** Axces silencers are also manufactured based on specific dimensions or client's requirements.