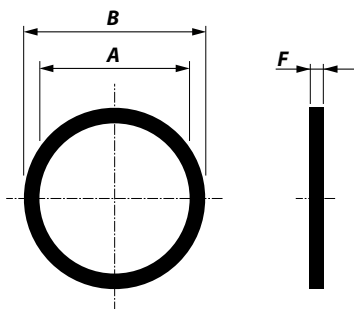


**GRAPHITE GASKET
TYPE CIRCULAR
JIS B2220 - 10K**

Article No.	Size (Inch)	NB (mm)	Pipe (mm)	A (mm)	B (mm)	F (mm)	Weight (kg)
213350030010	1	25	34.5	35	90	2	0.1
213350030013	1.25	32	43.2	43	100	2	0.1
213350030015	1.5	40	49.1	49	105	2	0.1
213350030020	2	50	61.1	61	120	2	0.1
213350030025	2.5	65	77.1	77	140	2	0.2
213350030030	3	80	90.0	90	150	2	0.2
213350030040	4	100	115.4	116	175	2	0.2
213350030050	5	125	141.2	142	210	2	0.2
213350030060	6	150	166.6	167	240	2	0.3
213350030080	8	200	218.0	218	290	2	0.3
213350030100	10	250	269.5	270	355	2	0.3
213350030120	12	300	321.0	321	400	2	0.3
213350030140	14	350	358.1	358	445	2	0.4
213350030160	16	400	409.0	409	510	2	0.4
213350030180	18	450	460.0	460	565	2	0.4
213350030200	20	500	511.0	511	620	2	0.5
213350030240	24	600	613.0	613	730	2	0.8
213350030280	28	700	715.0	715	840	2	0.8
213350030320	32	800	817.0	817	950	2	0.8
213350030360	36	900	919.0	919	1050	2	1
213350030400	40	1000	1021.0	1021	1160	2	1

CHARACTERISTICS**Material** Gaskets are produced out of graphite**Range** Diameter range from 34.5 mm up to 1021 mm**Thickness** 2 mm, with an option for 3 and 4 mm**Temperature** The maximum allowable temperature is 600°C