

light on your work

X-RENT
4x1000W MH - 9M



TRIME

Lighting Tower Specialist



X-RENT 4X1000W MH - 9M

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-RENT has been created beginning from these characteristics. It is the best solution to your needs and guarantees 4200 sqm of illuminated area. 11 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.



8,5 m



1100 Kg



340°



4200 sqm



115(l) - 1,85(l/h)

- Multi-directionally adjustable and tiltable floodlights
- 7 sections hydraulic vertical tower 8,5m, 340° rotatable
- Standard light sensor for machine power on and off
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 11 units per truck
- Central lifting eye longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Fully bunded tank, 110%
- Certified wind stability up to 110 km/h
- 4 height adjustable stabilizers
- On board levels for guidance during stabilization

APPLICATIONS



Gas, oil & mining operations



Special events



Rural & hard to reach areas



Emergency response



Construction & work sites



Military applications



Illuminated area
4200 sqm



11
Units Per Truck



You can place 11 units on a single vehicle thanks to one of the compactest footprints on the market.

KEY BENEFITS

✓ *Easy to move*

✓ *Robustness*

✓ *Versatile*

LIGHT SENSOR
FEATURED AS STANDARD

SAFETY HYDRAULIC
VERTICAL MAST

48 VOLT COILED CABLE

GALVANIZED BODY
DURABLE ANTI-CORROSION
PROTECTION

SAFETY AMOSS KIT
AUTOMATIC MAST
LOWERING SYSTEM

FORK LIFT POCKET



technical data

Dimensions & weight	
Dimensions min. (mm)	2560x1320x2480
Dimensions max. (mm)	2560x2170x8500
Total weight without fuel	1100 Kg

Features	
Rotation	340°
Floodlights	4x1000W
Lamps	Metal halide
Options	Homologated axle & towing hitch

Alternator	
Model	Synchronous
Frequency (Hz)	50
Insulation class	H
Degree of protection	IP23
Single phase voltage	8 kVA - 230V
Auxiliary outlets	3 kVA

Engine	
Model	Kubota D1105
Fuel	Diesel
r.p.m	1500
Tank capacity (l)	115
Consumption (l/h)	1,85
Noise level (dBA) at 7m	68
Running time	62 h

Standard load delivery


11 sets



Units Per Truck

Illuminated area (5 lux min.)

4200 sqm

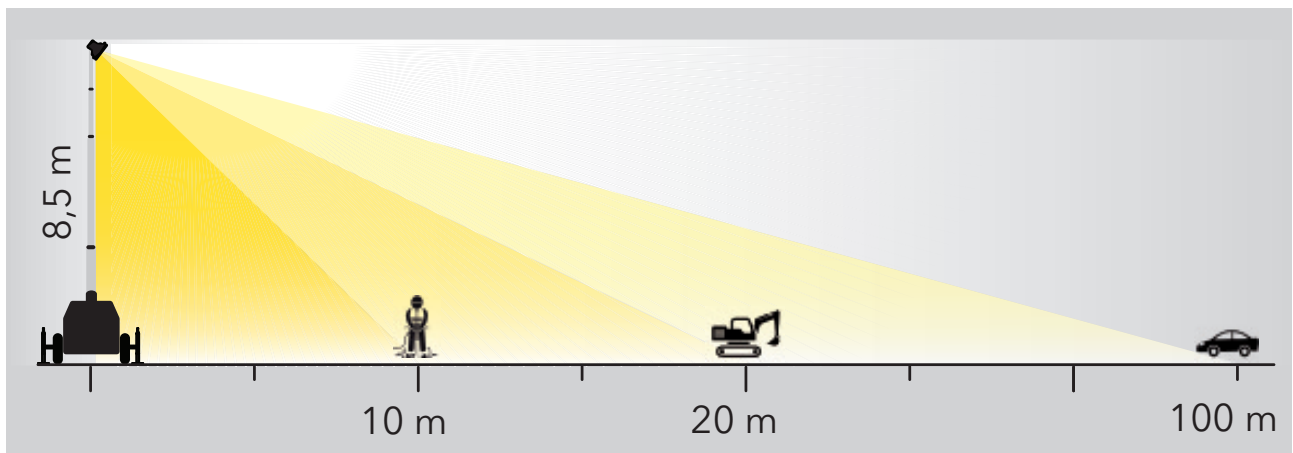

Lighting Tower **Specialist**

TRIME s.p.a.

Strada per Robecco, snc
 20081 Cassinetta di Lugagnano (MI)
 Tel. +39 02 942 1724
 www.trime.it - info@trime.it