



Single-Sided
Version Shown



Double-Sided
Version Shown



Double-Sided
Version Shown



Double-Sided
Version Shown



Double-Sided
Version Shown



Single-Sided
Version Shown

Motive™ Cable Management

Evolution® Cable Management


MCS Master Cabling Section

CCS Combination Cabling Section

VCS Vertical Cabling Section

Velocity® Cable Management

<p>Application: Network facilities and data center computer rooms; fiber optic-intensive installations</p>	<p>Application: Network facilities and data center computer rooms; high-density copper</p>	<p>Application: Network facilities and data center computer rooms</p>	<p>Application: Network facilities</p>	<p>Application: Network facilities</p>	<p>Application: Network facilities</p>
<p>Key Features:</p> <ul style="list-style-type: none"> • Frame has an extruded aluminum profile with an integral central track • Large radii are designed into many of the frame elements to protect and support cables as they enter and exit the manager • Accessory Rod, Rotating Management Finger, Cable Bundle Swivel and Half Spool offer tool-less installation and adjustment • Touch points are highlighted in blue for easy identification • Highly configurable to support a wide variety of applications • Dual-hinged door design with "slam" latch convenience • Convenient hook feature on inside of front door provides a dedicated location to hang a test meter 	<p>Key Features:</p> <ul style="list-style-type: none"> • Closed, single- or double-sided and combination vertical cable management available • T-shaped cable fingers with rounded edges organize cables • Cable openings align with each rack-mount unit on the rack, and pass 48 patch cords • Double-sided versions have movable mid-sections, allowing a 40/60, 50/50 or 60/40 front/rear split of the interior storage space • Includes a removable, hinged door with a two-point latch and single door knob • Front door style matches the TeraFrame® Family of Cabinets 	<p>Key Features:</p> <ul style="list-style-type: none"> • Closed, single or double-sided vertical cable management available • T-shaped cable fingers with rounded edges organize cables • Cable openings align with each rack-mount unit on the rack, and pass 24 patch cords • Includes removable, hinged latch-closure door(s) • Available with standard (CCS) and deeper extended fingers (CCS-EFX) 	<p>Key Features:</p> <ul style="list-style-type: none"> • Combination, double-sided vertical cable management available • MCS-style front side and VCS-style back side • Front side includes a removable, hinged latch-closure door • T-shaped cable fingers with rounded edges organize cables • Cable openings align with each rack-mount unit on the rack, and pass 24 patch cords • Back side has edge protected openings and spin-latch closures • Available with standard (CCS) and deeper extended fingers (CCS-EFX) 	<p>Key Features:</p> <ul style="list-style-type: none"> • Open, single or double-sided vertical cable management available • Large side openings are edge protected • Spin-latch closures secure cables • Covers and snap-on T-Shaped Finger Snaps Cable Guides are available as accessories 	<p>Key Features:</p> <ul style="list-style-type: none"> • Closed, single or double-sided vertical cable management available • T-shaped cable fingers with rounded edges organize cables • Cable openings align with each rack-mount unit on the rack, and pass 24 patch cords • Includes removable, hinged snap-on covers • Ships unassembled in compact packaging for easy shipping, handling and storage • Tool-less, snap-together design for quick and easy assembly
<p>Heights (6):</p> <ul style="list-style-type: none"> • 6'0" (1.8 m) • 6'6" (2.0 m) • 7'0" (2.1 m) • 7'6" (2.3 m) • 8'0" (2.4 m) • 9'0" (2.7 m) 	<p>Heights (3):</p> <ul style="list-style-type: none"> • 6'0" (1.8 m) • 7'0" (2.1 m) • 8'0" (2.4 m) 	<p>Heights (7):</p> <ul style="list-style-type: none"> • 5'6" (1.7 m) • 6'0" (1.8 m) • 6'6" (2.0 m) • 7'0" (2.1 m)* • 7'6" (2.3 m)* • 8'0" (2.4 m)* • 9'0" (2.7 m) 	<p>Heights (5):</p> <ul style="list-style-type: none"> • 6'0" (1.8 m) • 6'6" (2.0 m)* • 7'0" (2.1 m)* • 7'6" (2.3 m)* • 8'0" (2.4 m)* • 9'0" (2.7 m) 	<p>Heights (7):</p> <ul style="list-style-type: none"> • 5'6" (1.7 m) • 6'0" (1.8 m) • 6'6" (2.0 m) • 7'0" (2.1 m)* • 7'6" (2.3 m) • 8'0" (2.4 m)* • 9'0" (2.7 m)* 	<p>Heights (3):</p> <ul style="list-style-type: none"> • 70" (1778 mm) for 6'H (1.8 m) racks • 80.5" (2045 mm) for 7'H (2.1 m) racks • 91" (2311 mm) for 8'H (2.4 m) racks
<p>Widths (5):</p> <ul style="list-style-type: none"> • 6" (150 mm) • 8" (200 mm) • 10" (250 mm) • 12" (300 mm) • 15" (380 mm) 	<p>Widths (5):</p> <ul style="list-style-type: none"> • 6" (150 mm) • 8" (200 mm) • 10" (250 mm) • 12" (300 mm) • 15" (380 mm) 	<p>Widths (4):</p> <ul style="list-style-type: none"> • 4.4" (112 mm) • 6" (150 mm)* • 10" (250 mm)* • 12" (300 mm)* 	<p>Widths (4):</p> <ul style="list-style-type: none"> • 3.65" (92.7 mm) • 6" (150 mm)* • 10" (250 mm)* • 12" (300 mm)* 	<p>Widths (2):</p> <ul style="list-style-type: none"> • 3.65" (92.7 mm) • 6" (150 mm) 	<p>Widths (4):</p> <ul style="list-style-type: none"> • 3.6" (92 mm) • 6" (150 mm) • 10" (250 mm) • 12" (300 mm)
<p>Depths (2):</p> <ul style="list-style-type: none"> • 15.5" (394 mm) • 23.6" (600 mm)* <p><i>*Double-sided version</i></p>	<p>Depths (3):</p> <ul style="list-style-type: none"> • 13.2" (335 mm) • 24.5" (622 mm)* • 20.2" (513 mm)* <p><i>*Double-sided versions</i></p>	<p>Depths (4):</p> <ul style="list-style-type: none"> • 8.08" (205.2 mm) • 10.62" (269.7 mm)* • 16.15" (410.2 mm) • 21.23" (539.2 mm)* <p><i>*MCS-EFX versions</i></p>	<p>Depths (3):</p> <ul style="list-style-type: none"> • 12.24" (310.9 mm) • 14.61" (371.1 mm) • 14.94" (379.5 mm)* <p><i>*CCS-EFX versions</i></p>	<p>Depths (2):</p> <ul style="list-style-type: none"> • 6.38" (162.1 mm) • 12.75" (323.9 mm)* <p><i>*Double-sided versions</i></p>	<p>Depths (2):</p> <ul style="list-style-type: none"> • 9.5" (241 mm) • 16" (406 mm)* <p><i>*Double-sided version</i></p>

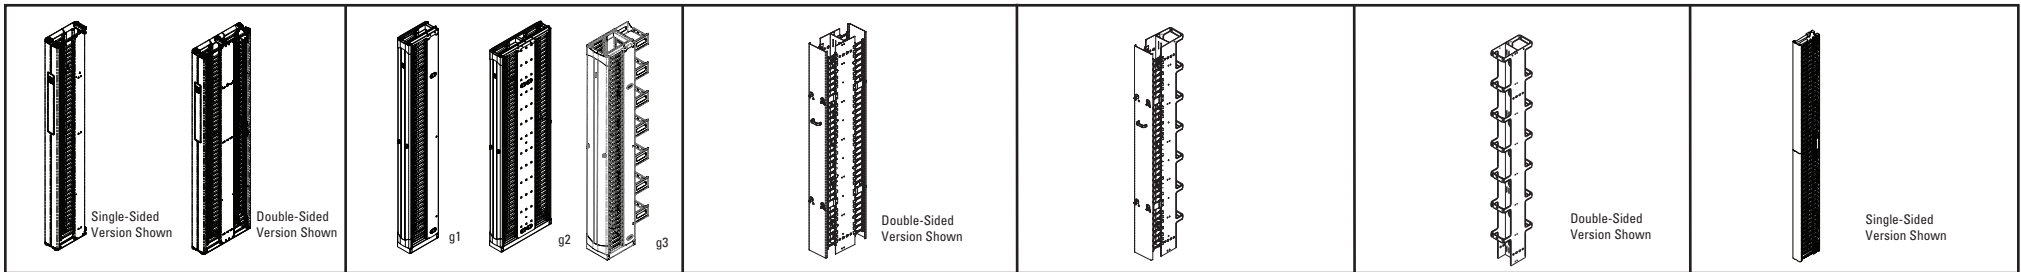

Motive Cable Management Evolution Cable Management MCS Master Cabling Section CCS Combination Cabling Section VCS Vertical Cabling Section Velocity Cable Management

Motive Single-Sided, Vertical		
Part No.	Description	Wt. lb (kg)
32610-X03	7"H x 6"W x 15.5"D (2.1 m x 150 mm x 394 mm)	51 (23.0)
32611-X03	7"H x 8"W x 15.5"D (2.1 m x 200 mm x 394 mm)	55 (24.8)
32612-X03	7"H x 10"W x 15.5"D (2.1 m x 250 mm x 394 mm)	58 (26.1)
32613-X03	7"H x 12"W x 15.5"D (2.1 m x 300 mm x 394 mm)	60 (27.3)
32614-X03	7"H x 15"W x 15.5"D (2.1 m x 380 mm x 394 mm)	65 (29.3)

Note: X=Color: 7=Black, E=Glacier White.

Accessories		
Part No.	Description	Wt. lb (kg)
32650-X01	Accessory Rod for Single-Sided Motive	2 (0.7)
32650-X02	Vertical Cable Manager Accy Rod Assembly for Double-Sided Motive	2 (0.7)
32651-001	Vertical Cable Manager Half Spool Kit	1 (0.5)
32661-001	Rotating Management Finger Kit	1 (0.5)
32657-001	Cable Bundle Swivel	1 (0.5)
32601-001	Dual PDU Bracket Kit	2 (0.7)
32657-002	Cable Bundle Swivel Kit, Pack of 48	1 (0.5)

Note: X=Color: 7=Black, E=Glacier White.

Evolution g1 Single-Sided, Vertical		
Part No.	Description	Wt. lb (kg)
35511-X03	7"H x 6"W x 13.2"D (2.1 m x 150 mm x 335 mm)	57 (25.9)
35512-X03	7"H x 8"W x 13.2"D (2.1 m x 200 mm x 335 mm)	61 (27.7)
35513-X03	7"H x 10"W x 13.2"D (2.1 m x 250 mm x 335 mm)	67 (30.4)
35514-X03	7"H x 12"W x 13.2"D (2.1 m x 300 mm x 335 mm)	73 (33.1)
35515-X03	7"H x 15"W x 13.2"D (2.1 m x 380 mm x 335 mm)	83 (37.6)

Evolution g2 Double-Sided, Vertical		
Part No.	Description	Wt. lb (kg)
35521-X03	7"H x 6"W x 24.5"D (2.1 m x 150 mm x 622 mm)	94 (42.6)
35522-X03	7"H x 8"W x 24.5"D (2.1 m x 200 mm x 622 mm)	101 (45.8)
35523-X03	7"H x 10"W x 24.5"D (2.1 m x 250 mm x 622 mm)	110 (49.9)
35524-X03	7"H x 12"W x 24.5"D (2.1 m x 300 mm x 622 mm)	118 (53.5)
35525-X03	7"H x 15"W x 24.5"D (2.1 m x 380 mm x 622 mm)	129 (58.5)

Evolution g3 Combination, Vertical		
Part No.	Description	Wt. lb (kg)
35571-X03	7"H x 6"W x 20.2"D (2.1 m x 150 mm x 513 mm)	68 (30.8)
35572-X03	7"H x 8"W x 20.2"D (2.1 m x 200 mm x 513 mm)	72 (32.7)
35573-X03	7"H x 10"W x 20.2"D (2.1 m x 250 mm x 513 mm)	78 (35.4)
35574-X03	7"H x 12"W x 20.2"D (2.1 m x 300 mm x 513 mm)	84 (38.1)
35575-X03	7"H x 15"W x 20.2"D (2.1 m x 380 mm x 513 mm)	94 (42.6)

Note: X=Color: 7=Black, E=Glacier White.

MCS Master Cabling Section		
Part No.	Description	Wt. lb (kg)
30092-X03	7"H x 6"W x 8.08"D (2.1 m x 150 mm x 205.2 mm) Single-Sided	20 (9.1)
30093-X03	7"H x 10"W x 8.08"D (2.1 m x 250 mm x 205.2 mm) Single-Sided	45 (20.4)
30095-X03	7"H x 6"W x 16.15"D (2.1 m x 150 mm x 410.2 mm) Double-Sided	45 (20.4)
30096-X03	7"H x 10"W x 16.15"D (2.1 m x 250 mm x 410.2 mm) Double-Sided	53 (24)

Note: X=Color: 5=Clear, 7=Black, E=Glacier White. Other sizes available.

MCS - EFX Extended Fingers		
Part No.	Description	Wt. lb (kg)
40093-X03	7"H x 10"W x 10.62"D (2.1 m x 250 mm x 269.7 mm) Single-Sided	40 (18.1)
40094-X03	7"H x 12"W x 10.62"D (2.1 m x 300 mm x 269.7 mm) Single-Sided	44 (20)
40096-X03	7"H x 10"W x 21.23"D (2.1 m x 250 mm x 539.2 mm) Double-Sided	69 (31.3)
40097-X03	7"H x 12"W x 21.23"D (2.1 m x 300 mm x 539.2 mm) Double-Sided	75 (34)

Note: X=Color: 5=Clear, 7=Black, E=Glacier White. Cable Spools are included with double-sided 10"W or 12"W (250 mm or 300 mm) MCS.

Universal Horizontal Cable Manager		
Part No.	Description	Wt. lb (kg)
30139-X19	1U x 19"EIA x 4.9"D (126 mm)	2 (0.9)
30130-X19	2U x 19"EIA x 5.1"D (130 mm)	3 (1.4)
30131-X19	3U x 19"EIA x 5.1"D (130 mm)	4 (1.8)
30339-X19*	1U x 19"EIA x 6.2"D (159 mm)	3 (1.4)
30330-X19*	2U x 19"EIA x 6.4"D (163 mm)	4 (1.8)
30331-X19*	3U x 19"EIA x 6.4"D (163 mm)	5 (2.3)

Note: X=Color: 7=Black, E=Glacier White. *Use deep panel models when MCS is center-mounted on Standard or Universal Rack. Other sizes and styles are available.

CCS Combination Cabling Section		
Part No.	Description	Wt. lb (kg)
30161-X03	7"H x 3.65"W x 12.24"D (2.1 m x 150 mm x 310.9 mm) Double-Sided	29 (13.2)
30162-X03	7"H x 6"W x 12.24"D (2.1 m x 250 mm x 310.9 mm) Double-Sided	34 (15.4)
30163-X03	7"H x 10"W x 12.24"D (2.1 m x 150 mm x 310.9 mm) Double-Sided	46 (20.9)
30164-X03*	7"H x 3.65"W x 14.61"D (2.1 m x 92.7 mm x 371.1 mm) Double-Sided	33 (15)
30165-X03*	7"H x 6"W x 14.61"D (2.1 m x 150 mm x 371.1 mm) Double-Sided	38 (17.2)
30166-X03*	7"H x 10"W x 14.61"D (2.1 m x 250 mm x 371.1 mm) Double-Sided	49 (22.2)

Note: X=Color: 7=Black, E=Glacier White. *Use with 6"D (150 mm) Standard Rack.

CCS-EFX Extended Fingers		
Part No.	Description	Wt. lb (kg)
40098-X03	7"H x 6"W x 14.94"D (2.1 m x 150 mm x 379.5 mm) Double-Sided	38 (17.2)
40099-X03	7"H x 10"W x 14.94"D (2.1 m x 250 mm x 379.5 mm) Double-Sided	52 (23.6)
40100-X03	7"H x 12"W x 14.94"D (2.1 m x 300 mm x 379.5 mm) Double-Sided	56 (25.4)

Note: X=Color: 7=Black, E=Glacier White. Use Universal Horizontal Cable Manager.

Accessories		
Part No.	Description	Wt. lb (kg)
15008-001	Cable Spools 2.5" Dia (64 mm) Set of 4, Black*	2 (0.9)
12370-001	Finger Snaps Set of 2, Black	1 (0.5)
12370-002	Finger Snaps Set of 12, Black	2 (0.9)

*Note: Cable Spools are for 10"W or 12"W (250 mm or 300 mm) CCS or CCS-EFX.

VCS Vertical Cabling Section		
Part No.	Description	Wt. lb (kg)
11730-X03	7"H x 3.65"W x 6.38"D (2.1 m x 92.7 mm x 162.1 mm) Single-Sided	14 (6.4)
11374-X03	7"H x 6"W x 6.38"D (2.1 m x 150 mm x 162.1 mm) Single-Sided	16 (7.3)
12096-X03	7"H x 3.65"W x 12.75"D (2.1 m x 92.7 mm x 323.9 mm) Double-Sided	24.0 (10.9)
11729-X03	7"H x 6"W x 12.75"D (2.1 m x 150 mm x 323.9 mm) Double-Sided	30 (13.6)

Note: X=Color: 1=Gray, 2=Computer Beige, 5=Clear, 7=Black, E=Glacier White.

19" Horizontal Wire Management Panel		
Part No.	Description	Wt. lb (kg)
13070-X19	1U x 19"EIA x 4"D (100 mm)	2 (0.9)
13075-X19	2U x 19"EIA x 4"D (100 mm)	2 (0.9)

Note: X=Color: 1=Gray, 2=Computer Beige, 5=Clear, 7=Black, E=Glacier White.

Accessories		
Part No.	Description	Wt. lb (kg)
12189-001	3.65"W (92.7 mm) Cover Smoked Acrylic	8 (3.6)
12188-001	6"W (150 mm) Cover Smoked Acrylic	9 (4.1)
12370-001	Finger Snaps Set of 2, Black	1 (0.5)
12370-002	Finger Snaps Set of 12, Black	2 (0.9)

See CPI cable fill table at www.chatsworth.com/cablefill for all cable managers, or download CPI's Mobile App Suite.

Velocity Cable Management		
Part No.	Description	Wt. lb (kg)
13901-703	80.5"H x 3.6"W x 9.7"D (2045 mm x 91 mm x 246 mm) Single-Sided, Black	18 (8.2)
13902-703	80.5"H x 6"W x 9.8"D (2045 mm x 152 mm x 249 mm) Single-Sided, Black	20 (9.1)
13904-703	80.5"H x 10"W x 10.3"D (2045 mm x 254 mm x 262 mm) Single-Sided, Black	32 (14.5)
13905-703	80.5"H x 12"W x 10.4"D (2045 mm x 305 mm x 264 mm) Single-Sided, Black	34 (15.4)
13911-703	80.5"H x 3.6"W x 16.4"D (2045 mm x 91 mm x 417 mm) Double-Sided, Black	25 (11.3)
13912-703	80.5"H x 6"W x 16.6"D (2045 mm x 152 mm x 422 mm) Double-Sided, Black	28 (12.7)
13914-703	80.5"H x 10"W x 17.5"D (2045 mm x 254 mm x 445 mm) Double-Sided, Black	40 (18.1)
13915-703	80.5"H x 12"W x 17.8"D (2045 mm x 305 mm x 446 mm) Double-Sided, Black	43 (19.5)

Note: Use vertical managers on 7H (2.1 m) racks.

Velocity Horizontal Cable Manager		
Part No.	Description	Wt. lb (kg)
13930-701	1U x 19"EIA x 5.9"D (150 mm), Black	2 (0.9)
13930-702	2U x 19"EIA x 5.9"D (150 mm), Black	3 (1.4)
13930-703	3U x 19"EIA x 5.9"D (150 mm), Black	3 (1.4)

Accessories		
Part No.	Description	Wt. lb (kg)
13934-717	Cable Ring Kit, 3.6" (91 mm) wide, for P/N 13901-703, Black	3 (1.4)
13934-727	Cable Ring Kit, 6" (152 mm) wide, for P/N 13902-703, Black	11 (5.0)
13934-747	Cable Ring Kit, 10" (254 mm) wide, for P/N 13904-703, Black	14 (6.4)
13934-757	Cable Ring Kit, 12" (305 mm) wide, for P/N 13905-703, Black	16 (7.3)



CPI's online Product Configurator is an easy-to-use, confidential tool that guides you through the steps and selections necessary to create customized systems. Check out the Product Configurator at www.chatsworth.com/configurator.

www.chatsworth.com • techsupport@chatsworth.com • +1-800-834-4969
 While every effort has been made to ensure the accuracy of all information, CPI does not accept liability for any errors or omissions and reserves the right to change information and descriptions of listed services and products.
 ©2016 Chatsworth Products, Inc. All rights reserved. Chatsworth Products, CPI, CPI Passive Cooling, eConnect, RMR, MegaFrame, Saf-T-Grip, Seismic Frame, SlimFrame, TeraFrame, GlobalFrame, CUBE-IT PLUS, Evolution, OnTrack, QuadraRack and Velocity are federally registered trademarks of Chatsworth Products. Simply Efficient, Secure Array, EuroFrame, Click-Nut and Motive are trademarks of Chatsworth Products. All other trademarks belong to their respective companies. Rev.10/11/16 MKT-60020-206