


NECAL - CREATE AND COAT WITH A PARTNER



WEB ADHESIVE COATING SOLUTIONS FROM NECAL

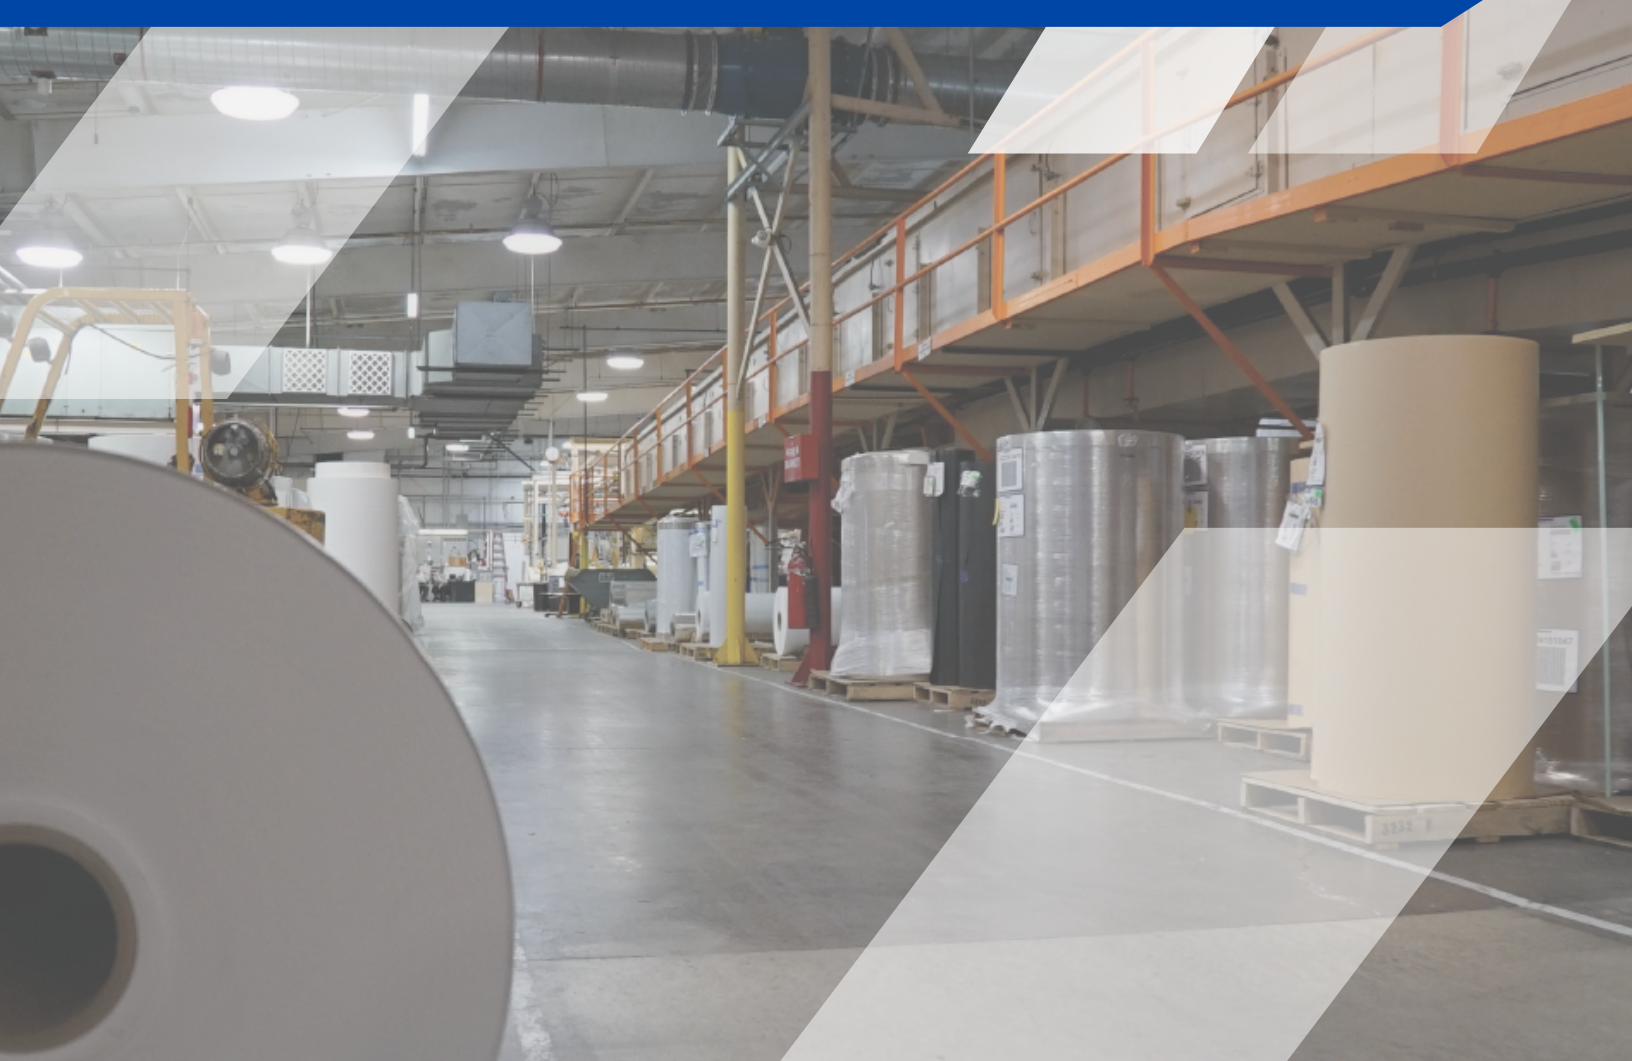

NECAL

Telephone: 608.269.3000 | Email: sales@necal.com

WWW.NECAL.COM

Expertly Combining Capability & Partnership for over 40 Years

Coating Parameters

Coater Type: Knife-over-roll
(Production and pilot)

Coating Types: Solvent acrylic,
rubber-based and emulsions

Viscosity Range: 600 – 8500 cps

Dry Coat Weight Range: 0.7 – 8 mils heavy

Coating Speeds: Up to 125 fpm

Maximum Web Width Input: 56 inches

Maximum Coated Width: 55.5 inches

Maximum Input Diameter: 36 inches

Maximum Output Diameter: 24 inches

Standard Core Diameter: 3 & 6 inches

Converting Parameters

Slit Web Width Range: 10 – 55.5 inches

Maximum Output Roll Diameter: 24 inches

Slitting Methods: Score or shear-cut

Sheeting

Die-cutting

Available NECAL Inputs

Numerous C1S and C2S liners (Film and paper-based)

Numerous Carriers (PET, non-woven, foam and more)

Numerous Adhesive Chemistries (HSE, LSE, high-temp, repositionable and more)

Additional Services

- * Direct and personal technical service
- * Fit-for-Use Testing
- * Compliance and Content
- Communication tightly controlled by confidentiality
 - RoHS, REACH, DecaBDE, Proposition 65 and Conflict Mineral Compliance
 - PSTC and ASTM
 - ISO 9001:2015



NECAL

Necal Corporation
1326 South Water Street
Sparta, Wisconsin 54656
Telephone: (608) 269-3000
WWW.NECAL.COM

NECAL will expertly coat and convert your products meeting your specifications utilizing either your materials or its stock materials.
Contact NECAL to discuss your project requirements.