

Celtron Load Cells

Product Overview



TEKEMAS

Product	Features	Capacities
Aluminum Single Point Load Cells		
LOC 	Anodized aluminum construction Floor and bench platform scales, counting scales, check weighers Platform size: 40 cm x 60 cm (16 in. x 24 in.) NTEP III 5000S (5 kg to 500 kg), OIML C3 (5 kg to 500 kg), IP66, FM* Interchangeable: Tedea-Huntleigh 1263 (LOC ME), 1250 / 1252 (LOC LE), 1042 (LOC SE)	5, 7, 10, 15, 20, 30, 50, 60, 75, 100, 150, 250, 300, 500, 635, 800, 1000 kg
LPS 	Anodized aluminum construction Retail and counting scales; packaging, dosing, and filling machines Low-profile compact design. Platform size: LPS SE—20 cm x 20 cm (8 in. x 8 in.), LPS ME—30 cm x 30 cm (12 in. x 12 in.), LPS LE—40 cm x 40 cm (16 in. x 16 in.) NTEP III 5000S (LPS ME), OIML C3, IP66, FM Approval Interchangeable: Tedea-Huntleigh 1006 (LPS SE), 1022 (LPS ME), 1242 (LPS LE)	LPS SE: 0.6, 1, 2, 3 kg LPS ME: 6, 10, 15, 20, 30, 35 kg LPS LE: 60, 100, 200 kg
HOC 	Anodized aluminum construction Floor platform scales, hoppers, belt conveyor scales Side-mount, rugged design with low sensitivity to moment Platform size: 120 cm x 120 cm (48 in. x 48 in.) OIML C3, IP66, FM* Interchangeable: Tedea-Huntleigh 1320	750, 1000, 2000 kg
S-Type Load Cells		
STC/STC-SS/STC-Aluminum 	STC nickel-plated alloy tool steel, STC-SS stainless steel construction, or STC-aluminum construction Bin, hopper, and belt conveyor scales Tension and compression measurements NTEP III 5000S and IIIL 10000S (250 lb to 20K lb), IP67, FM* Interchangeable: Sensortronics 60001 and 60050, Tedea-Huntleigh 615 and 616	STC-Aluminum: 5, 10, 20 kg STC/STC-SS: 25, 50, 75, 100, 250, 500, 750, 1000, 1500, 2000, 2500, 5000 kg 250, 300, 500, 750, 1000, 1500, 2000, 2500, 3000, 5000, 7500, 10000, 15000, 20000, 40000 lb
Shear Beam Load Cells		
SQB/SQB-SS/SEB 	SQB/SEB nickel-plated alloy tool steel or SQB-SS Stainless Steel construction Floor scales; tank, bin, and hopper weighing Through- or threaded-load hole SQB—NTEP III 5000M (1K lb to 10K lb), FM* SEB—OIML C3 (0.5K lb to 2.5K kg), IP67, FM* Interchangeable: Sensortronics 65023, Tedea-Huntleigh 3410, Revere 5123	250, 500, 1000, 1500, 2000, 2500, 5000 kg 500, 1000, 2000, 2500, 3000, 4000, 5000, 10000, 15000, 20000 lb
Hermetically-Sealed Bending Beam		
HBB 	Stainless steel construction (alloy steel for 30 kg and 75 kg capacities) OIML C3 approval for stainless versions Platform scales, silo/hopper/tank weighing, packaging machines, dosing/filling, belt scales/convey or scales	10, 20, 30, 50, 75, 100, 200, 250 kg (30, 75 kg alloy steel)

* FM Approval optional

Product	Features	Capacities
Double-Ended Shear Beam Load Cells		
DSR/DSR-SS 	DSR nickel-plated alloy tool steel or DSR-SS stainless steel construction Batching, blending, and mixing; level and inventory monitoring; tank, bin, and silo weighing IP67, FM* Interchangeable: Sontronics 65016, Revere 5203/9203	1000, 1500, 2000, 2500, 3000, 5000, 10000, 15000, 20000, 25000, 50000, 75000 lb
DSR-HSS 	Stainless Steel, welded construction. Batching, blending, and mixing; level and inventory monitoring; tank, bin, and silo weighing IP68, FM* Interchangeable: Sontronics 65016-0104W	2000, 2500, 3000, 5000, 10000, 15000, 20000, 25000, 50000, 75000 lb
DLB 	Nickel-plated alloy tool steel construction Truck and railroad track scales Double-ended link loading NTEP III L 10000M, IP67, FM* Interchangeable: Sontronics 65040	25000, 40000, 50000, 60000, 75000, 100000, 125000 lb
CLB 	Nickel-plated alloy tool steel construction Truck and railroad track scales; tank, bin, and silo weighing NTEP III L 10000M, IP67, FM* Interchangeable: Sontronics 65058, Tedea-Huntleigh 4158, Revere 5303	20000, 25000, 40000, 50000, 60000, 75000, 100000, 125000 lb
CSB 	Nickel-plated alloy tool steel construction Truck and railroad track scales; tank, bin, and silo weighing NTEP III L 10000M, IP67, FM* Interchangeable: Sontronics 60058, Revere 5103	5000, 10000, 20000, 30000, 40000, 50000, 60000, 100000, 150000 lb
MDB/MDB-H 	MDB: nickel-plated alloy tool steel, IP67, FM* MDB-H: nickel-plated alloy tool steel welded construction, IP68. Hermetically sealed version available Truck and railroad track scales Supplied with mounting hardware	10000, 20000, 25000, 30000, 40000, 50000 kg
Compression Load Cells		
PSD 	Nickel-plated alloy tool steel construction (200 kg made of aluminum) Truck scales; tank, bin, and silo weighing; universal material tester Low-profile, low-deflection disk design IP67	200, 500, 1000, 1500, 2500, 5000, 10000, 25000 kg
LCD 	Nickel-plated alloy tool steel construction Truck scales; tank, bin, and silo weighing; universal material tester Low-profile, low-deflection, high-output disk design IP67, FM*	5000, 10000, 25000, 50000, 100000 lb
MFT 	Alloy steel construction (aluminum for low capacities) Testing machines, hopper/tank/silo weighing Compact size, low profile IP66	0.1, 0.2, 0.3, 0.5, 60, 200 † (100, 200, 300 and 500 kg aluminum)

* FM Approval optional

VPG Transducers

Celltron • Revere • Sensortronics • Tedea-Huntleigh




TEKEMAS A/S ØST
Naverland 2
DK-2600 GLOSTRUP
DENMARK

TEKEMAS A/S VEST
Nydamsvej 45
DK-8362 Hørning
DENMARK

+45 3670 6000
WWW.TEKEMAS.DK

TEKEMAS AB
VARLABERGSVÄGEN 16F
SE-434 39 KUNGSBACKA
SVERIGE

+46 7096 16081 /
+45 3670 6000
WWW.TEKEMAS.COM

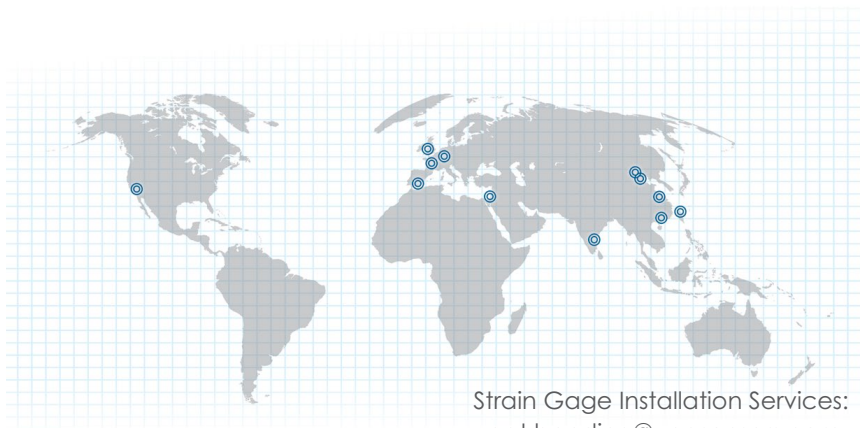

Strain Gage Installation Services:
vpgt.bonding@vpgsensors.com

DISCLAIMER: ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE. Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein. VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.** Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com. No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG. The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.

PL0317-1610-EN