

Advanced Process Control Instruments Family

FEATURES

- DIN Rail mount
- Modular system with flexible configuration
- Up to 6 weighing/force measurement channels per unit
- Synchronized sampling of all channels
- Fast update rate – up to 800 updates per second
- Easy access to service and control panel
- Integrated flexible digital I/O
- Communication: Ethernet, Profibus, DeviceNet, Modbus, USB, RS485, RS232, Modbus/TCP, EtherNet/IP
- Easy parameter backup and restoration via USB port or internal memory

APPLICATIONS

- Process weighing and control
- Force measurement
- Web tension measurement and control
- Automation
- Force vector calculations
- High dynamic force measurement
- High speed batching/blending systems

DESCRIPTION

The BLH Nobel G4-RM family of process control instruments offers high speed, high performance control for industrial weighing and force measurement applications plant wide. G4-RM units set new standards geared for today's application demands and tomorrow's expanding requirements.

G4-RM instruments accommodate up to three different, easily installed, modules for advanced performance, more functional channels, custom applications, or repair. This provides customers with a highly flexible, upgradeable, single instrument system capable of weighing up to six independent vessels or scales. For web tension applications, up to six zones (rolls) can be monitored simultaneously. Inputs and outputs can be configured according to customer requirements.



DIN-Rail Mount Unit




A wide variety of industrial communication interfaces (Ethernet, RS232, RS485), Protocols (Modbus RTU, Modbus TCP, EtherNet/IP) and Fieldbuses (Profibus or Devicenet) are available.

Software upgrades can be downloaded to the instrument from our website, or be transferred to the G4-RM unit via a standard USB port connection.

Custom software designed to customer requirements for special applications is available upon request.

DIN Rail mount units are rated IP20. Power supply is 24 VDC.

CONFIGURATION

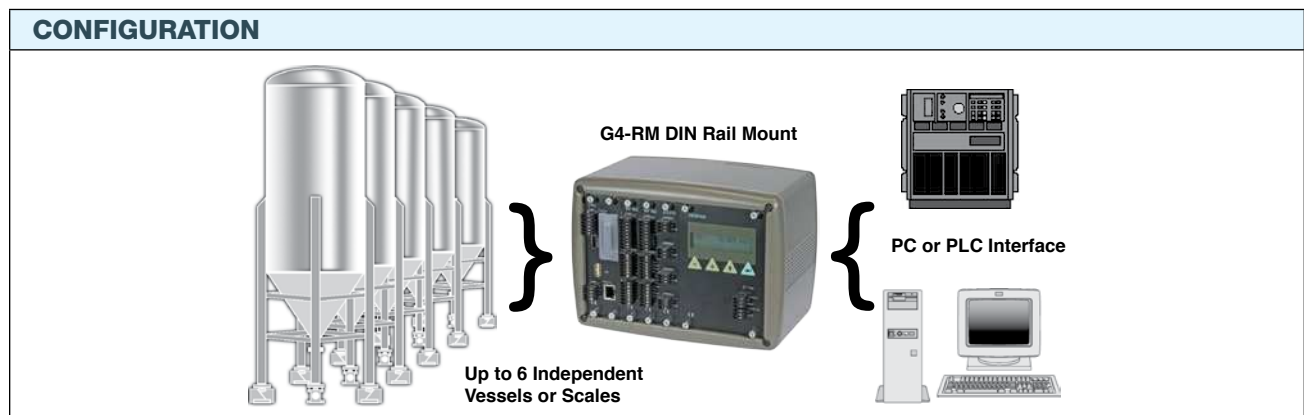

Document No.: 12208 Revision: 11-Apr-2018

Advanced Process Control Instruments Family

SPECIFICATIONS		PARAMETER	VALUE
Enclosure types		DIN	
Dimensions W x H x D		229x168x145 mm	
Enclosure design		Aluminum housing	
ENVIRONMENTAL			
Temperature range – Rated performance		-10 to +50°C	
Temperature range – Storage		-25 to +85°C	
Protection		IP20	
EMC, Safety		CE (Industrial), UL, cUL, FM, cFM	
Display		2 x 16 character LCD with backlighting	
Keyboard		4 membrane keys	
POWER			
DC SUPPLY module		19–29 VDC, 40 W	
CPU MODULE			
Interfaces		Isolated	
RS232 and RS485, ports		For process data and control	
Protocol		Modbus RTU	
Baud rate		Up to 115 kbaud	
USB, supported units		Version 1	
Keyboard		USB keyboard for PC	
Memory stick		USB type for PC For backup and restore of set-up parameters. For change to a new program version	
Ethernet		For process data and control	
Protocol		Modbus TCP and EtherNet/IP	
Field bus or Industrial Ethernet, Optional		For process data and control	
Available field busses		Profibus or DeviceNet. Other on demand (contact factory)	
		PARAMETER	VALUE
		WF IN1 (1 INPUT) AND WF IN2 (2 INPUTS) WEIGHT/FORCE INPUT MODULES	
		Max. no. of load cells	8 per channel
		Excitation voltage	5 VDC
		A/D conversion	3.9 kHz, 16,000,000 units (24 bits)
		Input range	±7 mV/V
		Update rate	1 up to 300 readings per second
		No. of weight channels	Up to 6 channels
		Sensitivity	0.1 µV
		Zero drift	<10 nV/V/K
		Span drift	<2 ppm/K
		Digital I/O	4 inputs, 24 V, isolated with common return 2 outputs, 24 V, max. 100 mA, isolated with common return
		HS WF2 HIGH SPEED WEIGHT/FORCE INPUT MODULE	
		Max. no. of load cells	4 per channel
		Excitation voltage	10 VDC
		A/D conversion	20 kHz, 16,000,000 units (24 bits)
		Input range	±4.5 mV/V
		Update rate	6 up to 800 readings per second
		No. of weight channels	2 or 4 channels
		Sensitivity	0.1 µV
		Zero drift	<10 nV/V/K
		Span drift	<2 ppm/K
		Digital I/O	4 inputs, 24 V, isolated with common return 2 outputs, 24 V, max. 100 mA, isolated with common return
		DI08 MODULE, DIGITAL INPUT AND OUTPUT MODULE	
		Separate I/O module	2 units can be used
		Type	8 inputs, 24 V, isolated with common return 8 outputs, 24 V, max. 100 mA, isolated with common return
		AOUT1 / AOUT4 ANALOG OUTPUT MODULES	
		Number of channels	1 or 4, separately isolated channels
		Resolution	65,000 units, 16 bits
		Voltage output	0 to 10 V, -10 to 10 V, >1 kΩ load
		Current output	4 to 20 mA, 0 to 20 mA, -12 to 20 mA or -20 to 20 mA <500 Ω load
		Update rate	Analog input update rate, adjustable smoothing filter

Advanced Process Control Instruments Family

ORDERING INFORMATION

Part Number Nomenclature: G4-RM-FB-S1-S2-S3-P

Code	Type	Part Number Reference	Description
G4	Instrument type	G4	—
RM	Enclosure type	RM	2 Rail mount
FB	Fieldbus interface	0 P D	None Profibus DeviceNet
Si	Slot 1 to 3 type	0 1 2 3 4 5 6 7 8	Blank HSWF1—High speed weight/force, single input module HSWF2—High speed weight/force, dual input module WFIN1—Weight/force, single input module WFIN2—Weight / force, dual input module TBD AOUT1—Analog output, single channel AOUT4—Analog output, 4 channels DIO8—Digital input and output module
V	User interface and power	V	Viewpan, 24 VDC
S	Software version	W F S	Weighing Force Special version (contact factory for option code)

Example of actual part number: G4-RM-0-4-8-0-V-F

Where:

G4 instrument (G4)

DIN Rail mount (RM)

No field bus or special protocol (0)

Slot 1 = WF1 (4)

Slot 2 = DIO8 (8)

Slot 3 = Blank (0)

Power = Viewpan (V)

F = Force software version

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.