

Weighing Instrument

FEATURES

- Frequency acquisition AC/DC signal up to 1000 Hz
- Able to interface with intrinsically safe barriers for use in hazardous areas
- Capacitive keyboard
- Joint fieldbus and analogue output protocol installation
- Removable terminal blocks

OPTIONS

- Analogue output
- Expanded data storage capacity
- Multiple field bus options available

APPLICATIONS


- Various industrial systems

DESCRIPTION

The Model WT14 is a high quality weighing indicator suitable for almost any application. The WT14's four-button capacitive keyboard allows easy access to the configuration and calibration functions. The model comes with RS232 and RS485 serial ports and a USB device port as standard. Additionally, the instrument can be equipped with the most widely used fieldbuses and it can interface with the vast majority of supervision devices currently offered on the market.




OUTLINE DIMENSIONS

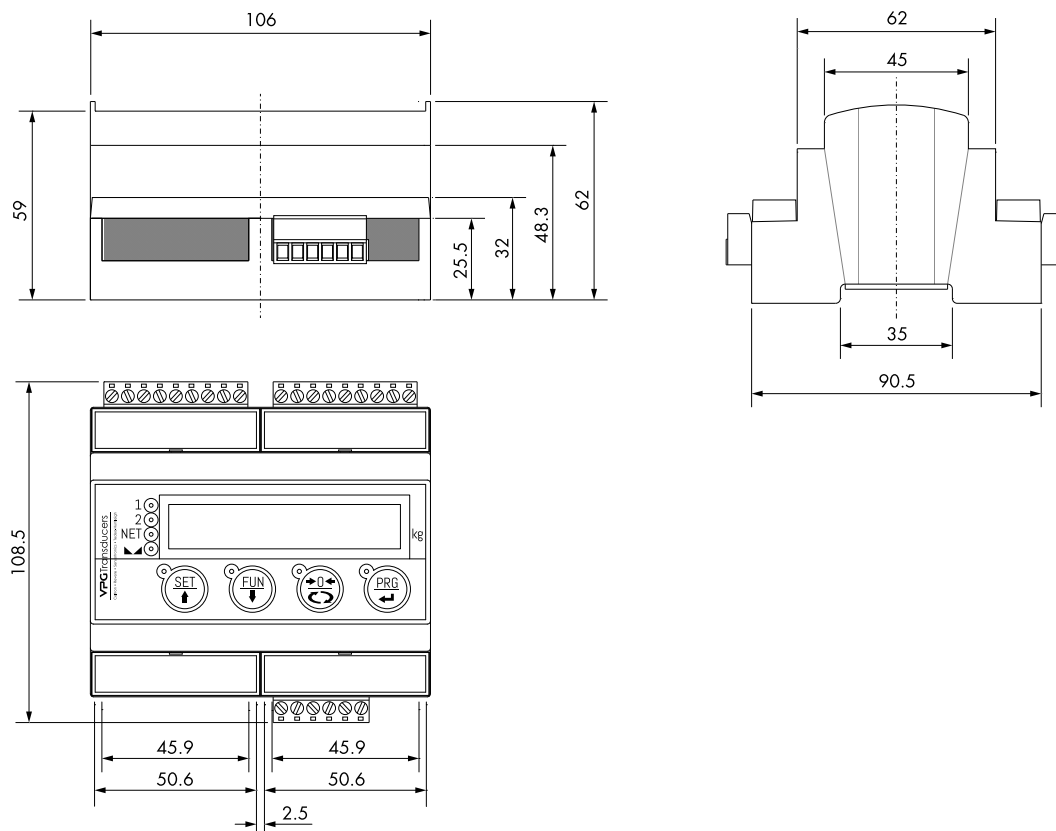

Document No.: 85989 Revision: 21-Jun-2018

Weighing Instrument

WIRING DIAGRAM

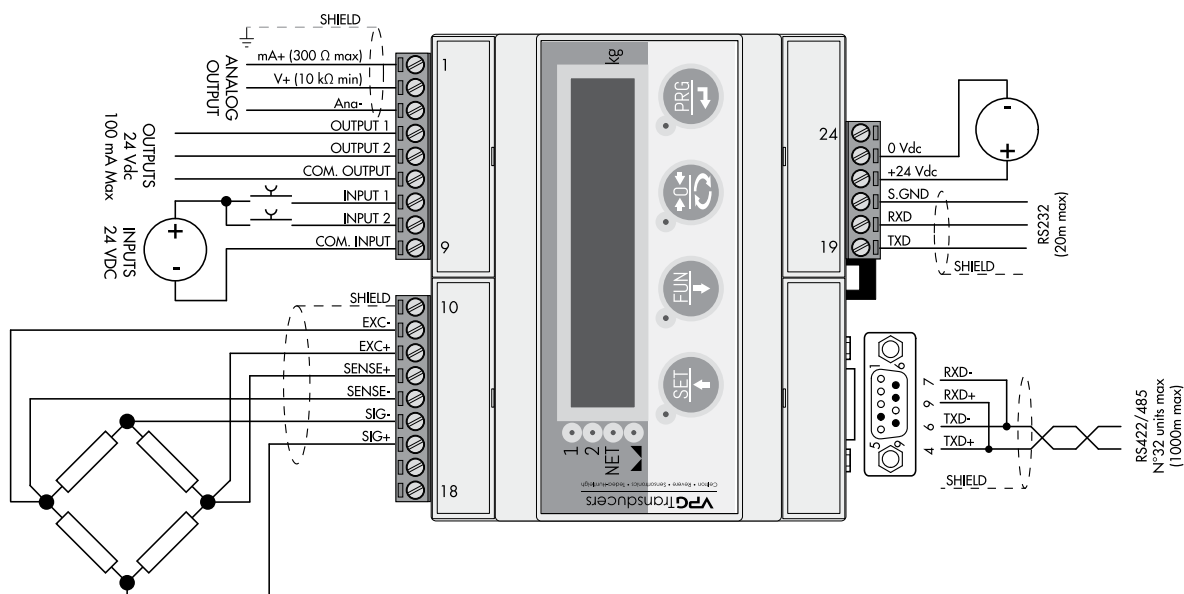

SPECIFICATIONS

PERFORMANCE

Power Output

5 V

Measuring Range

-3.9 to +3.9 mV/V

Input Sensitivity

0.02 μ V/division

Linearity

<0.01% of full scale

Temperature Drift

<0.001% of full scale $^{\circ}$ C

D/A Convertor

24 bit

Maximum Load Cells

8 at 350 Ω

Frequency Signal Acquisition

12 to 1000 Hz

Internal Resolution

>16,000,000 counts

Visible Resolution

999,999 counts (visible on net weight)

Divisions Value (Adjustable)

x 1, x 2, x 5, x 10, x 20, x 50

Decimals Setting

0.0, 0.00, 0.000, 0.0000

Filter (Adjustable)

0.5 to 1000 Hz

Microcontroller

ARM Cortex M0 with 32-bit 256 KB Flash, reprogrammable on-board from USB

Data Storage

64 KB to 1024 KB

ENVIRONMENTAL

Operating Temperature

-10 to +50 $^{\circ}$ C

Storage Temperature

-20 to +70 $^{\circ}$ C

Maximum Humidity Before Condensation

85%

DISPLAY AND KEYBOARD

Display

6 digit, 7 segment, LED

Digit Height

14 mm

Keyboard

4 key capacitive keyboard

Weighing Instrument

ELECTRICAL

Voltage

12 to 24 $\pm 15\%$ VDC

Wattage

5 W

INPUT AND LOGICS

Logic Input

24 VDC (external voltage), 2 opto-isolated, PNP

Logic Output

2 solid state relays
(maximum load 24 VDC/100 mA each)

ANALOG OUTPUT (OPTIONAL)

Output

16 bit, opto-isolated

Tension

0 to 5/10 V, (R min 10 k Ω)

Current

0/4 to 20 mA (R max 300 Ω)

Linearity

<0.02% of full scale

Temperature Drift

<0.001% of full scale $^{\circ}\text{C}$

SERIAL COMMUNICATION

Serial Output #1

1 RS232C

Baud Rate

2400 to 115200 (adjustable)

Serial Output #2

1 RS485

Baud Rate

2400 to 115200 (adjustable)

Serial Output #3

USB device interface

Serial Output #4 (Optional)

PROFINET interface

Serial Port #5 (Optional)

EtherCAT interface

Serial Port #6 (Optional)

DeviceNet interface

Serial Port #7 (Optional)

Ethernet interface

Connection Speed

10 to 100 mbps

ENCLOSURES

Dimensions

106 x 108 x 62 mm, L x H x D

Mounting

DIN Rail

Electrical Connections


5 mm removal terminal blocks

APPROVALS

EN

EN61000-6-2, EN61000-6-3 for EMC;
EN61010-1 for electrical safety

ORDERING INFORMATION FOR WT14

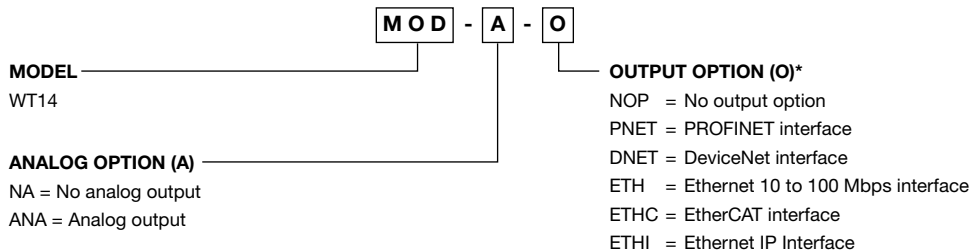

Example Completed Part Numbers:

WT14-NA-ETH is the part number for a WT14 with no analog output but comes with an Ethernet 10 to 100 mbps interface.
WT14-ANA-DNET is the part number for a WT14 with an analog output and a DeviceNet interface.

***This is mandatory: customers must select an output option.**

All specifications subject to change without notice.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase.

To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.

Document No.: 63999 Revision: 15-Jul-2014