

SPECIFICATIONS

MHN33PD

ENERGY ADVANTAGE™ HE FRONT-LOAD WASHER



ADVANCED SPIN TECHNOLOGY

- Delivers more accurate cycle times and better unbalanced performance*
- A six-point suspension features four dampers and two springs, providing better stability for the entire wash unit
- An accelerometer provides an accurate reading of cabinet vibration



DURACORE DRIVE SYSTEM

- DuraCore Drive System is designed and tested to run 15,000 cycles**
- Watertight, flexible triple-lip seal with garter spring keeps moisture away from the shaft, protecting the premium bearings
- Durable shaft sleeve is designed to eliminate shaft wear



INTELLIGENT CONTROLS WITH M-SERIES TECHNOLOGY

- Provides powerful profits for owners and flexibility for customers
- Enhanced controls allow customized setup; each cycle and option can be priced individually, maximizing revenue




REDESIGNED BELLOW



ROBUST HINGE



DURABLE DISPENSER



FRONT ACCESS PANEL

ENERGY-EFFICIENT CLEANING

- ENERGY STAR®-certified and uses on average 10.71 gallons of water per cycle, which helps reduce energy and water costs
- TurboWash™ System's proven high-efficiency technology delivers energy savings without sacrificing cleaning performance



*Compared to previous model, MHN30, based on 18-lb. load.

**Based on 11-lb. load, 34 min. timed cycle, Heavy Soil.

SPECIFICATIONS

MHN33PD

ENERGY ADVANTAGE™ HE FRONT-LOAD WASHER




MAYTAG® ENERGY ADVANTAGE™ HE FRONT-LOAD WASHER INTELLIGENT CONTROLS, COIN-DROP

WASHER SPECIFICATIONS	
MODEL	MHN33PD
MOTOR	1/2 (.37)
Variable-Speed, Reversible, Thermoprotected, High-Efficiency, Controlled Induction	Yes
Wash — HP (kW)	.09 (.07)
Extract — HP (kW)	.54 (.40)
Average Energy Consumption Per Cycle (kWh)	.054
CAPACITY	
Cylinder Volume — cu. ft. (liters)	3.1 (88)
Cylinder Diameter — in. (mm)	21.6 (547)
Cylinder Depth — in. (mm)	13.4 (341)
WATER INLET HOSE	
Ft. (m)	4 (1.22)
DRAIN HOSE	
Ft. (m)	6 (1.83)
APPROXIMATE WATER USAGE — GALLONS (LITERS)	
Average Hot Water Usage, Hot Water Cycle	2.71 (10.26)
Average Hot Water Usage, Warm Water Cycle	.71 (2.69)
Average Total Water Usage Per Cycle*	10.71 (40.5)
Modified Energy Factor (MEF ₂)*	2.2
Integrated Water Factor (IWF)*	3.5
ELECTRICAL RATING	
Domestic Model — voltage	120V / 60Hz
BREAKER / FUSE MIN. REQUIREMENTS	
Domestic Model — amps	15
WASH SPEED — RPM	40
EXTRACT SPEED — MAX RPM / MAX G-FORCE	1,000 / 300
WATER SUPPLY PRESSURE	
Psi (bar)	20 – 100 (1 – 8)
ADJUSTABLE LEVELING LEGS	Yes
COLOR	White
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	254 (115)
Uncrated — lbs. (kg)	245 (111)
DIMENSIONS	
Width — in. (mm)	27 (686)
Depth — in. (mm)	28.81 (732)
Height — in. (mm)	44.63 (1,134)**
Door Opening Diameter — in. (mm)**	14.25 (362)
ADA-Compliant with Optional Pedestal	Yes
OPTIONAL PEDESTAL ADD:	
Height — in. (mm)	2.75 (70)

*Based on 2018 United States DOE J2 testing with factory preset cycles.

**Includes height of metercase.

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

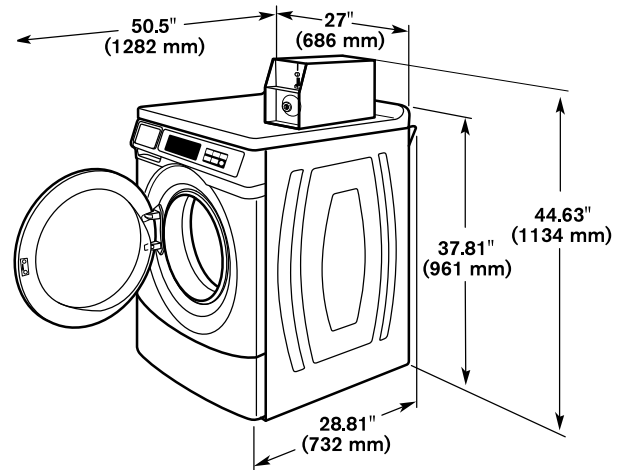

AMERICA
AN AMERICAN COMPANY FOR OVER 100 YEARS



*Visit maytagcommerciallaundry.com for warranty details