

# Irinnox North America PRICELIST 2019 Reps





|                                 |           |
|---------------------------------|-----------|
| ICY                             |           |
| Icy XS                          | <b>4</b>  |
| Icy S                           | <b>5</b>  |
| Icy M                           | <b>6</b>  |
| Icy L                           | <b>7</b>  |
| MULTIFRESH                      |           |
| MF 25.1 PLUS                    | <b>8</b>  |
| MF 30.2 PLUS                    | <b>10</b> |
| MF 45.1L PLUS                   | <b>12</b> |
| MF 70.1L PLUS                   | <b>14</b> |
| MF 100.1                        | <b>16</b> |
| MF 100.2 SELF - CONTAINED       | <b>18</b> |
| MF 100.2                        | <b>20</b> |
| MF 130.2                        | <b>22</b> |
| MF 180.2                        | <b>24</b> |
| MF 250.2                        | <b>26</b> |
| MF 250.2 2T Pass Thru           | <b>28</b> |
| MF 350.2 2T Pass Thru           | <b>31</b> |
| MF 500.2 2T Pass Thru           | <b>33</b> |
| MF 350.2 3T Pass Thru           | <b>35</b> |
| MF 500.2 3T Pass Thru           | <b>37</b> |
| MF 750.2 3T Pass Thru           | <b>39</b> |
| MF 750.2 4T Pass Thru           | <b>41</b> |
| MF 180.2 Large                  | <b>44</b> |
| MF 350.2 2T L Pass Thru - Large | <b>46</b> |
| MF 500.2 3T L Pass Thru - Large | <b>49</b> |
| MF 750.2 4T L Pass Thru - Large | <b>52</b> |

## AVAILABLE VERSIONS

### REACH-IN

|    |                             |
|----|-----------------------------|
| A  | Air condensation            |
| WL | Pipeline water condensation |
| RU | Remote condensing unit      |

### ROLL-IN

|     |                                     |
|-----|-------------------------------------|
| RU  | Remote air condensation             |
| RWL | Pipeline water condensation         |
| RWT | Tower water condensation            |
| RR  | Air condensation + remote condenser |

# ICY XS


## EQUIPMENT DIMENSIONS (in)

### YIELD

|                |         |
|----------------|---------|
| (194°F / 37°F) | 22.1 lb |
| (194°F / 0°F)  | 22.1 lb |

### TRAYS CAPACITY

### NR



|                    |
|--------------------|
| 12" x 20" x 2 1/2" |
| 18" x 13" x 2 1/2" |

|   |
|---|
| 3 |
| 3 |



### WEIGHT

|    |     |
|----|-----|
| lb | 159 |
|----|-----|

### ELECTRICAL DATA

|                       |                |
|-----------------------|----------------|
| Max power consumption | 0,8 kW         |
| Max current absorbed  | 9.3 A          |
| Voltage               | 115V-60Hz(1Ph) |

### VERSION EQUIPMENT

### PRICE

|                  |              |
|------------------|--------------|
| Air condensation | \$ 10,185.00 |
|------------------|--------------|

### STANDARD EQUIPMENT

|                                            |
|--------------------------------------------|
| Air condensation                           |
| Left opening (hinges on the left)          |
| Standard adjustable feet H 3 1/4" - 4 1/2" |
| Fumigated wooden crate                     |
| Core Probe                                 |
| N 1 Wire Shelf 12 51/64" x 20 55/64"       |

### OPTIONAL

### PRICE

|                                                 |           |
|-------------------------------------------------|-----------|
| Castors with brake (2 with brake and 2 without) | \$ 250.00 |
| Extra Wire Shelf 12 51/64" x 20 55/64"          | \$ 60.00  |

# ICY S


## EQUIPMENT DIMENSIONS (in)


### YIELD

|                  |       |
|------------------|-------|
| (+194°F / +37°F) | 39 lb |
| (+194°F / 0°F)   | 33 lb |

### TRAYS CAPACITY

### NR

|                                                                                   |                            |   |
|-----------------------------------------------------------------------------------|----------------------------|---|
|  | 12" x 20" x 2 1/2" on rack | 6 |
|                                                                                   | 18" x 26"                  | 5 |



### WEIGHT

|    |     |
|----|-----|
| lb | 300 |
|----|-----|

### ELECTRICAL DATA

|                       |                  |
|-----------------------|------------------|
| Max power consumption | 1,3 kW           |
| Max current absorbed  | 8.2 A            |
| Voltage               | 208 V-60Hz (1Ph) |

### VERSION EQUIPMENT

### PRICE

|                  |              |
|------------------|--------------|
| Air condensation | \$ 13,997.00 |
|------------------|--------------|

### STANDARD EQUIPMENT

|                                        |
|----------------------------------------|
| Air condensation                       |
| MultiRack standard + 5 pairs of guides |
| Left opening (hinges on the left)      |
| Standard adjustable feet H 6 - 7 7/8"  |
| Core probe                             |
| USB kit                                |
| Fumigated wooden crate                 |
| N 2 Wire Shelves 26 5/8" x 18 1/4"     |

### OPTIONAL

### PRICE

|                                                                                        |           |
|----------------------------------------------------------------------------------------|-----------|
| Right opening (hinges on the right)                                                    | \$ 395.00 |
| Additional Pair of guides                                                              | \$ 52.00  |
| Castors with brake (2 with brake and 2 without) H 3 55/64"<br>Machine High H 34 61/64" | \$ 250.00 |
| Sanigen®                                                                               | \$ 560.00 |
| Extra Wire Shelf 26 5/8" x 18 1/4"                                                     | \$ 83.00  |

# ICY M


## EQUIPMENT DIMENSIONS (in)

### YIELD

|                 |       |
|-----------------|-------|
| (194 °F / 37°F) | 83 lb |
| (194 °F / 0°F)  | 77 lb |

### TRAYS CAPACITY

### NR

|                                                                                   |                            |           |
|-----------------------------------------------------------------------------------|----------------------------|-----------|
|  | 12" x 20" x 2 1/2" on rack | <b>18</b> |
|                                                                                   | 18" x 26"                  | <b>12</b> |



### WEIGHT

|    |     |
|----|-----|
| lb | 437 |
|----|-----|

### ELECTRICAL DATA

|                       |                   |
|-----------------------|-------------------|
| Max power consumption | 3.1 kW            |
| Max current absorbed  | 9.1 A             |
| Voltage               | 208V - 60Hz (3Ph) |

### VERSION EQUIPMENT

### PRICE

|                  |                     |
|------------------|---------------------|
| Air condensation | <b>\$ 23,534.00</b> |
|------------------|---------------------|

### STANDARD EQUIPMENT

|                                              |
|----------------------------------------------|
| Air condensation                             |
| MultiRack standard + 12 pairs of guides      |
| Left opening (hinges on the left)            |
| Standard adjustable feet H 6 17/64" - 7 7/8" |
| Core probe                                   |
| USB kit                                      |
| Fumigated wooden crate                       |
| N 4 Wire Shelves 26 5/8" x 18 1/4"           |

### OPTIONAL

### PRICE

|                                                                                       |                  |
|---------------------------------------------------------------------------------------|------------------|
| Right opening (hinges on the right)                                                   | <b>\$ 395.00</b> |
| Additional Pair of guides                                                             | <b>\$ 52.00</b>  |
| Castors with brake (2 with brake and 2 without) H 6 7/64"<br>Machine Height H 64 3/8" | <b>\$ 250.00</b> |
| Sanigen®                                                                              | <b>\$ 560.00</b> |
| Extra Wire Shelf 26 5/8" x 18 1/4"                                                    | <b>\$ 83.00</b>  |


# ICY L

## YIELD

|                 |        |
|-----------------|--------|
| (194 °F / 37°F) | 110 lb |
| (194 °F / 0°F)  | 99 lb  |

## TRAYS CAPACITY

## NR

|                                                                                   |                            |           |
|-----------------------------------------------------------------------------------|----------------------------|-----------|
|  | 12" x 20" x 2 1/2" on rack | <b>26</b> |
|                                                                                   | 18" x 26"                  | <b>18</b> |

## EQUIPMENT DIMENSIONS (in)



## WEIGHT

|    |     |
|----|-----|
| lb | 570 |
|----|-----|

## ELECTRICAL DATA

|                       |                   |
|-----------------------|-------------------|
| Max power consumption | 4.7 kW            |
| Max tension absorbed  | 13.4 A            |
| Voltage               | 208V - 60Hz (3Ph) |

## VERSION EQUIPMENT

## PRICE

|                  |                     |
|------------------|---------------------|
| Air condensation | <b>\$ 26,666.00</b> |
|------------------|---------------------|

## STANDARD EQUIPMENT

|                                              |
|----------------------------------------------|
| Air condensation                             |
| MultiRack standard + 18 pairs of guides      |
| Left opening (hinges on the left)            |
| Standard adjustable feet H 6 17/64" - 7 7/8" |
| Core probe                                   |
| USB kit                                      |
| Fumigated wooden crate                       |
| N 6 Wire Shelves 26 5/8" x 18 1/4"           |

## OPTIONAL

## PRICE

|                                                                                        |                  |
|----------------------------------------------------------------------------------------|------------------|
| Right opening (hinges on the right)                                                    | <b>\$ 395.00</b> |
| Additional Pair of guides                                                              | <b>\$ 52.00</b>  |
| Castors with brake (2 with brake and 2 without) H 6 7/64"<br>Machine Height H 79 9/64" | <b>\$ 250.00</b> |
| Sanigen®                                                                               | <b>\$ 560.00</b> |
| Extra Wire Shelf 26 5/8" x 18 1/4"                                                     | <b>\$ 83.00</b>  |

# MF 25.1 PLUS


## EQUIPMENT DIMENSIONS (in)


### YIELD

|                |       |
|----------------|-------|
| (194°F / 37°F) | 55 lb |
| (194°F / 0°F)  | 55 lb |

### TRAYS CAPACITY

### NR

|                                                                                   |                    |   |
|-----------------------------------------------------------------------------------|--------------------|---|
|  | 12" x 20" x 2 1/2" | 4 |
|                                                                                   | 18" x 13" on rack  | 5 |



### WEIGHT

254 lb

### ELECTRICAL DATA

|                       |                 |
|-----------------------|-----------------|
| Max power consumption | 1.3 kW          |
| Max current absorbed  | 6.4 A           |
| Voltage               | 208V-60Hz (1Ph) |

### VERSION EQUIPMENT

### PRICE

|    |                             |              |
|----|-----------------------------|--------------|
| A  | Air condensation            | \$ 18,073.00 |
| WL | Cityline water condensation | \$ 20,525.00 |
| RU | Remote Condensing Unit      | \$ 19,897.00 |

All versions are PLUS: Sanigen® / thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

### STANDARD EQUIPMENT

|                                        |
|----------------------------------------|
| Air condensation                       |
| Left opening (hinges on the left)      |
| Standard adjustable feet H 6 - 7 7/8"  |
| MultiRack standard + 5 pairs of guides |
| Core probe (5 points)                  |
| Fumigated wooden crate                 |
| N 2 Wire Shelves 12 51/64" x 20 55/64" |



## MF 25.1 PLUS

| OPTIONAL                                                                                                       | PRICE       |
|----------------------------------------------------------------------------------------------------------------|-------------|
| Additional pair of guides                                                                                      | \$ 52.00    |
| Right opening (hinges on the right)                                                                            | \$ 395.00   |
| Castors with brake (2 with brake and 2 without) H 3 $\frac{55}{64}$ "<br>Machine height H 34 $\frac{61}{64}$ " | \$ 250.00   |
| Sous-vide core probe                                                                                           | \$ 1,068.00 |
| Additional core probe (for left hinged door)                                                                   | \$ 603.00   |
| Additional core probe (for right hinged door)                                                                  | \$ 603.00   |
| Kit software + router + USB HACCP MyA                                                                          | \$ 349.00   |
| Extra Wire Shelf 12 $\frac{51}{64}$ "x20 $\frac{55}{64}$ "                                                     | \$ 60.00    |

# MF 30.2 PLUS


## EQUIPMENT DIMENSIONS (in)


### YIELD

|                |       |
|----------------|-------|
| (194°F / 37°F) | 66 lb |
| (194°F / 0°F)  | 66 lb |

### TRAYS CAPACITY

### NR

|                                                                                   |                            |   |
|-----------------------------------------------------------------------------------|----------------------------|---|
|  | 12" x 20" x 2 1/2" on rack | 6 |
|                                                                                   | 18" x 26"                  | 5 |



### WEIGHT

309 lb

### ELECTRICAL DATA

|                       |                 |
|-----------------------|-----------------|
| Max power consumption | 2.3 kW          |
| Max current absorbed  | 11.7 A          |
| Voltage               | 208V-60Hz (1Ph) |

### VERSION EQUIPMENT

### PRICE

|    |                             |              |
|----|-----------------------------|--------------|
| A  | Air condensation            | \$ 20,857.00 |
| WL | Cityline water condensation | \$ 21,649.00 |
| RU | Remote condensing unit      | \$ 22,547.00 |

All versions are PLUS: Sanigen® / thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

### STANDARD EQUIPMENT

|                                        |
|----------------------------------------|
| Air condensation                       |
| Left opening (hinges on the left)      |
| Standard adjustable feet H 6 - 7 7/8"  |
| MultiRack standard + 5 pairs of guides |
| Core probe (5 points)                  |
| Fumigated wooden crate                 |
| N 2 Wire Shelves 26 5/8" x 18 1/4"     |

## MF 30.2 PLUS

| OPTIONAL                                                                                                       | PRICE       |
|----------------------------------------------------------------------------------------------------------------|-------------|
| Additional pair guides                                                                                         | \$ 52.00    |
| Right opening (hinges on the right)                                                                            | \$ 395.00   |
| Castors with brake (2 with brake and 2 without) H 3 $5\frac{5}{64}$ "<br>Machine height H 34 $6\frac{1}{64}$ " | \$ 250.00   |
| Sous-vide core probe                                                                                           | \$ 1,068.00 |
| Additional core probe (for left hinged door)                                                                   | \$ 603.00   |
| Additional core probe (for right hinged door)                                                                  | \$ 603.00   |
| Box for remote condensing unit (RU version)                                                                    | \$ 1,718.00 |
| Kit software + router + USB HACCP MyA                                                                          | \$ 349.00   |
| Extra Wire Shelf 26 $\frac{5}{8}$ " x 18 $\frac{1}{4}$ "                                                       | \$ 83.00    |

# MF 45.1L PLUS


## EQUIPMENT DIMENSIONS (in)

### YIELD

|                |       |
|----------------|-------|
| (194°F / 37°F) | 99 lb |
| (194°F / 0°F)  | 99 lb |

### TRAYS CAPACITY

### NR



12" x 20" x 2 1/2" on rack

**18**

18" x 26"

**12**



### WEIGHT

521 lb

### ELECTRICAL DATA

|                       |                 |
|-----------------------|-----------------|
| Max power consumption | 4.8 kW          |
| Max current absorbed  | 16 A            |
| Voltage               | 208V-60Hz (3Ph) |

### VERSION EQUIPMENT

### PRICE

|    |                             |                     |
|----|-----------------------------|---------------------|
| A  | Air condensation            | <b>\$ 29,440.00</b> |
| WL | Cityline water condensation | <b>\$ 29,274.00</b> |
| RU | Remote condensing unit      | <b>\$ 31,484.00</b> |

*All versions are PLUS: Sanigen® / thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.*

### STANDARD EQUIPMENT

Air condensation

Left opening (hinges on the left)

Standard adjustable feet H 6 - 7 7/8"

MultiRack standard + 12 pairs of guides

Core probe (5 points)

Fumigated wooden crate

N 4 Wire Shelves 26 5/8" x 18 1/4"

## MF 45.1L PLUS

| OPTIONAL                                                                                                    | PRICE       |
|-------------------------------------------------------------------------------------------------------------|-------------|
| Additional pair of guides                                                                                   | \$ 52.00    |
| Right opening (hinges on the right)                                                                         | \$ 395.00   |
| Castors with brake (2 with brake and 2 without) H 6 $\frac{7}{64}$ "<br>Machine height H 64 $\frac{3}{8}$ " | \$ 250.00   |
| Sous-vide core probe                                                                                        | \$ 1,068.00 |
| Additional core probe (for left hinged door)                                                                | \$ 603.00   |
| Additional core probe (for right hinged door)                                                               | \$ 603.00   |
| Box for remote condensing unit (RU version)                                                                 | \$ 977.00   |
| Kit software + router + USB HACCP MyA                                                                       | \$ 349.00   |
| Extra Wire Shelf 26 $\frac{5}{8}$ " x 18 $\frac{1}{4}$ "                                                    | \$ 83.00    |


# MF 70.1L PLUS

## YIELD

|                |        |
|----------------|--------|
| (194°F / 37°F) | 154 lb |
| (194°F / 0°F)  | 154 lb |

## TRAYS CAPACITY

## NR

|                                                                                   |                            |           |
|-----------------------------------------------------------------------------------|----------------------------|-----------|
|  | 12" x 20" x 2 1/2" on rack | <b>26</b> |
|                                                                                   | 18" x 26"                  | <b>18</b> |

## EQUIPMENT DIMENSIONS (in)



## WEIGHT

742 lb

## ELECTRICAL DATA

|                       |                 |
|-----------------------|-----------------|
| Max power consumption | 6.7 kW          |
| Max current absorbed  | 26.8 A          |
| Voltage               | 208V-60Hz (3Ph) |

## VERSION EQUIPMENT

## PRICE

|    |                             |                     |
|----|-----------------------------|---------------------|
| A  | Air condensation            | <b>\$ 37,292.00</b> |
| WL | Cityline water condensation | <b>\$ 36,311.00</b> |
| RU | Remote condensing unit      | <b>\$ 39,111.00</b> |

*All versions are PLUS: Sanigen® / thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.*

## STANDARD EQUIPMENT

Air condensation

Left opening (hinges on the left)

Standard adjustable feet H 6 - 7 7/8"

MultiRack standard + 18 pairs of guides

Core probe (5 points)

Fumigated wooden crate

N 6 Wire Shelves 26 5/8" x 18 1/4"

## MF 70.1L PLUS

| OPTIONAL                                                                                                     | PRICE       |
|--------------------------------------------------------------------------------------------------------------|-------------|
| Additional pair of guides                                                                                    | \$ 52.00    |
| Right opening (hinges on the right)                                                                          | \$ 395.00   |
| Castors with brake (2 with brake and 2 without) H 6 $\frac{7}{64}$ "<br>Machine height H 79 $\frac{9}{64}$ " | \$ 250.00   |
| Sous-vide core probe                                                                                         | \$ 1,068.00 |
| Additional core probe (for left hinged door)                                                                 | \$ 603.00   |
| Additional core probe (for right hinged door)                                                                | \$ 603.00   |
| Box for remote condensing unit (RU version)                                                                  | \$ 977.00   |
| Kit software + router + USB HACCP MyA                                                                        | \$ 349.00   |
| Extra Wire Shelf 26 $\frac{5}{8}$ " x 18 $\frac{1}{4}$ "                                                     | \$ 83.00    |

# MF 100.1

## YIELD

|                |        |
|----------------|--------|
| (194°F / 37°F) | 220 lb |
| (194°F / 0°F)  | 220 lb |

## TROLLEYS CAPACITY

## NR

Roll-in rack  
12"x20" pans only

1

## COND. UNIT DIMENSIONS - A (in)

|        |                                    |
|--------|------------------------------------|
| width  | 34 <sup>5</sup> / <sub>16</sub> "  |
| depth  | 53 <sup>3</sup> / <sub>16</sub> "  |
| height | 55 <sup>13</sup> / <sub>16</sub> " |
| weight | 440 lb                             |

## EQUIPMENT DIMENSIONS (in)



## EQUIPMENT WEIGHT

750 lb

## ELECTRICAL DATA

## STANDARD

## COND. U. UC100A

|                       |                   |                   |
|-----------------------|-------------------|-------------------|
| Max power consumption | 1.6 kW            | 12 kW             |
| Max current absorbed  | 5.2 A             | 38.7 A            |
| Voltage               | 208V - 60Hz (3Ph) | 208V - 60Hz (3Ph) |

## VERSION EQUIPMENT

## PRICE

|     |                             |              |
|-----|-----------------------------|--------------|
| RU  | Air condensation            | \$ 72,290.00 |
| RWL | Cityline water condensation | \$ 70,645.00 |
| RWT | Tower water condensation    | \$ 70,599.00 |

## STANDARD EQUIPMENT

Air condensation + Sanigen®  
Right opening (hinges on the right)  
Sunken floor  
Core probe (5 points)  
Fumigated wooden crate



## MF 100.1

| OPTIONAL                                                         | PRICE        |
|------------------------------------------------------------------|--------------|
| Sunken floor - left opening (hinges on the left)                 | \$ 662.00    |
| With ramp - left opening (hinges on the left)                    | \$ 1,596.00  |
| With ramp - right opening (hinges on the right)                  | \$ 1,596.00  |
| Knocked down                                                     | \$ 1,248.00  |
| Door stop 120°                                                   | \$ 288.00    |
| Door stop 95° (side by side equipments)                          | \$ 288.00    |
| Sous-vide core probe                                             | \$ 1,068.00  |
| Additional core probe                                            | \$ 603.00    |
| Low temperature kit (RU version)                                 | \$ 1,259.00  |
| Without condensing unit (with fumigated wooden crate) + Sanigen® | \$ 49,219.00 |
| Kit software + router + USB HACCP MyA                            | \$ 245.00    |

### OTHER VERSIONS DIMENSIONS (in)

| RWL    | COND. U.            |
|--------|---------------------|
| width  | 34 $\frac{5}{16}$ " |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 396 lb              |

| RWT    | COND. U.            |
|--------|---------------------|
| width  | 34 $\frac{5}{16}$ " |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 396 lb              |

# MF 100.2 SELF - CONTAINED

## YIELD

|                |        |
|----------------|--------|
| (194°F / 37°F) | 220 lb |
| (194°F / 0°F)  | 220 lb |

## TROLLEYS CAPACITY

## NR

|                              |                                    |          |
|------------------------------|------------------------------------|----------|
| <b>Type B<br/>Slim rack</b>  | 28,25"x18"                         | <b>2</b> |
| <b>Type C<br/>Full rack</b>  | 20,25"x26"                         | <b>1</b> |
| <b>Type D<br/>Combi rack</b> | combi oven trolley<br>(on request) | <b>1</b> |

## EQUIPMENT DIMENSIONS (in)



## EQUIPMENT WEIGHT

1720 lb

## ELECTRICAL DATA

## STANDARD

## PLUS\*

|                       |                  |                  |
|-----------------------|------------------|------------------|
| Max power consumption | 14.3 kW          | 14.3 kW          |
| Max current absorbed  | 45 A             | 45 A             |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

## VERSION

## STANDARD

## PLUS\*

|                    |                     |                      |
|--------------------|---------------------|----------------------|
|                    | PRICE               | PRICE                |
| A Air condensation | <b>\$ 88,319.00</b> | <b>\$ 103,335.00</b> |

**\* PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

## STANDARD EQUIPMENT

Air condensation + Sanigen®

Right opening (hinges on the right)

With ramp

Core probe (5 points)


Fumigated wooden crate

## MF 100.2 SELF-CONTAINED


| OPTIONAL                                 | PRICE       |
|------------------------------------------|-------------|
| Left opening (hinges on the left)        | \$ 449.00   |
| Knocked down                             | \$ 1,248.00 |
| Door stop 120°                           | \$ 288.00   |
| Door stop 100° (side by side equipments) | \$ 288.00   |
| Sous-vide core probe                     | \$ 1,068.00 |
| Additional core probe                    | \$ 603.00   |
| Kit software + router + USB HACCP MyA    | \$ 245.00   |

### TROLLEYS ARRANGEMENT


Available inner area 32  $\frac{1}{4}$ " X 35  $\frac{7}{16}$ "



**Type B - 2 trolleys**  
**Slim rack**  
 28,25" x 18" x h 69,25"



**Type C - 1 trolley**  
**Full rack**  
 20,25" x 26" x h 69,5"



**Type D - 1 trolley**  
**Combi rack**  
 combi oven trolley

# MF 100.2

## YIELD

|                |        |
|----------------|--------|
| (194°F / 37°F) | 220 lb |
| (194°F / 0°F)  | 220 lb |

## TROLLEYS CAPACITY

## NR

|                                    |                                    |          |
|------------------------------------|------------------------------------|----------|
| <b>Type B</b><br><b>Slim rack</b>  | 28,25"x18"                         | <b>2</b> |
| <b>Type C</b><br><b>Full rack</b>  | 20,25"x26"                         | <b>1</b> |
| <b>Type D</b><br><b>Combi rack</b> | combi oven trolley<br>(on request) | <b>1</b> |

## COND. UNIT DIMENSIONS -RU (in)

|        |                                    |
|--------|------------------------------------|
| width  | 34 <sup>5</sup> / <sub>16</sub> "  |
| depth  | 53 <sup>3</sup> / <sub>16</sub> "  |
| height | 55 <sup>13</sup> / <sub>16</sub> " |
| weight | 440 lb                             |

## EQUIPMENT DIMENSIONS (in)



## EQUIPMENT WEIGHT

1058 lb

| ELECTRICAL DATA       | STANDARD         | PLUS*            | COND. U. UC100A  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 3,4 kW           | 11,2 kW          | 12 kW            |
| Max current absorbed  | 10,6 A           | 31,4 A           | 38.7 A           |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

| VERSION                         | STANDARD            | PLUS*               |
|---------------------------------|---------------------|---------------------|
|                                 | PRICE               | PRICE               |
| RU Air condensation             | <b>\$ 74,651.00</b> | <b>\$ 84,863.00</b> |
| RWL Pipeline water condensation | <b>\$ 74,554.00</b> | <b>\$ 84,899.00</b> |
| RWT Tower water condensation    | <b>\$ 74,499.00</b> | <b>\$ 84,691.00</b> |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

## STANDARD EQUIPMENT

Air condensation with oil separator + Sanigen®

Right opening (hinges on the right)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

## MF 100.2

| OPTIONAL                                                                               | PRICE        |
|----------------------------------------------------------------------------------------|--------------|
| With ramp                                                                              | \$ 1,158.00  |
| Left opening (hinges on the left)                                                      | \$ 499.00    |
| Knocked down                                                                           | \$ 1,248.00  |
| Door stop 120°                                                                         | \$ 288.00    |
| Door stop 100° (side by side equipments)                                               | \$ 288.00    |
| Sous-vide core probe                                                                   | \$ 1,068.00  |
| Additional core probe                                                                  | \$ 603.00    |
| Low temperature kit (RU version)                                                       | \$ 1,259.00  |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 54,086.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 59,913.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00    |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00    |


### OTHER VERSIONS DIMENSIONS (in)

| RWL    | COND. U.            |
|--------|---------------------|
| width  | 34 $\frac{5}{16}$ " |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 396 lb              |


| RWT    | COND. U.            |
|--------|---------------------|
| width  | 34 $\frac{5}{16}$ " |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 396 lb              |

### TROLLEYS ARRANGEMENT


Available inner area 32  $\frac{1}{4}$ " X 35  $\frac{7}{16}$ "



**Type B - 2 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"



**Type C - 1 trolley**  
**Full rack**  
20,25" x 26" x h 69,5"



**Type D - 1 trolley**  
**Combi rack**  
combi oven trolley

# MF 130.2

## YIELD

|                  |        |
|------------------|--------|
| (194 °F / 37 °F) | 286 lb |
| (194 °F / 0 °F)  | 286 lb |

## TROLLEYS CAPACITY

## NR

|                                    |                                    |          |
|------------------------------------|------------------------------------|----------|
| <b>Type B</b><br><b>Slim rack</b>  | 28,25"x18"                         | <b>2</b> |
| <b>Type C</b><br><b>Full rack</b>  | 20,25"x26"                         | <b>1</b> |
| <b>Type D</b><br><b>Combi rack</b> | combi oven trolley<br>(on request) | <b>1</b> |

## COND. UNIT DIMENSIONS - RU (in)

|        |                                    |
|--------|------------------------------------|
| width  | 34 <sup>21</sup> / <sub>64</sub> " |
| depth  | 53 <sup>3</sup> / <sub>16</sub> "  |
| height | 55 <sup>53</sup> / <sub>64</sub> " |
| weight | 440 lb                             |

## ELECTRICAL DATA

## STANDARD

## PLUS\*

## COND. U. UC130A

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 3,4 kW           | 11,2 kW          | 16,4 kW          |
| Max current absorbed  | 10,6 A           | 31,4 A           | 53.3 A           |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

## VERSION

## STANDARD

## PLUS\*

|                                 | PRICE               | PRICE               |
|---------------------------------|---------------------|---------------------|
| RU Air condensation             | <b>\$ 79,377.00</b> | <b>\$ 86,795.00</b> |
| RWL Pipeline water condensation | <b>\$ 80,005.00</b> | <b>\$ 86,488.00</b> |
| RWT Tower water condensation    | <b>\$ 79,996.00</b> | <b>\$ 86,390.00</b> |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

## STANDARD EQUIPMENT

Air condensation with oil separator + Sanigen®

Right opening (hinges on the right)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

## EQUIPMENT DIMENSIONS (in)



## EQUIPMENT WEIGHT

1058 lb

## MF 130.2

| OPTIONAL                                                                               | PRICE        |
|----------------------------------------------------------------------------------------|--------------|
| With ramp                                                                              | \$ 1,158.00  |
| Left opening (hinges on the left)                                                      | \$ 499.00    |
| Knocked down                                                                           | \$ 1,248.00  |
| Door stop 120°                                                                         | \$ 288.00    |
| Door stop 100° (side by side equipments)                                               | \$ 288.00    |
| Sous-vide core probe                                                                   | \$ 1,068.00  |
| Additional core probe                                                                  | \$ 603.00    |
| Low temperature kit (RU version)                                                       | \$ 1,259.00  |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 57,179.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 63,206.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00    |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00    |


### OTHER VERSIONS DIMENSIONS (in)

| RWL    | COND. U.            |
|--------|---------------------|
| width  | 34 $\frac{5}{16}$ " |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 396 lb              |


| RWT    | COND. U.            |
|--------|---------------------|
| width  | 34 $\frac{5}{16}$ " |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 396 lb              |

### TROLLEYS ARRANGEMENT


Available inner area 32  $\frac{1}{4}$ " X 35  $\frac{7}{16}$ "



**Type B - 2 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"



**Type C - 1 trolley**  
**Full rack**  
20,25" x 26" x h 69,5"



**Type D - 1 trolley**  
**Combi rack**  
combi oven trolley

# MF 180.2

## YIELD

|                  |        |
|------------------|--------|
| (194 °F / 37 °F) | 396 lb |
| (194 °F / 0 °F)  | 396 lb |

## TROLLEYS CAPACITY

## NR

|                          |                                 |          |
|--------------------------|---------------------------------|----------|
| <b>Type B Slim rack</b>  | 28,25"x18"                      | <b>2</b> |
| <b>Type C Full rack</b>  | 20,25"x26"                      | <b>1</b> |
| <b>Type D Combi rack</b> | combi oven trolley (on request) | <b>1</b> |

## COND. UNIT DIMENSIONS - RU (in)

|        |          |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 60 1/8"  |
| weight | 677 lb   |

## EQUIPMENT DIMENSIONS (in)



## EQUIPMENT WEIGHT

1058 lb

## ELECTRICAL DATA

## STANDARD

## PLUS\*

## COND. U. UC180A

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 3,4 kW           | 11,2 kW          | 19,1 kW          |
| Max current absorbed  | 10,6 A           | 31,4 A           | 62,4 A           |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

## VERSION

## STANDARD

## PLUS\*

|                                 | PRICE               | PRICE               |
|---------------------------------|---------------------|---------------------|
| RU Air condensation             | <b>\$ 94,053.00</b> | <b>\$ 97,960.00</b> |
| RWL Pipeline water condensation | <b>\$ 89,026.00</b> | <b>\$ 97,104.00</b> |
| RWT Tower water condensation    | <b>\$ 89,050.00</b> | <b>\$97,130.00</b>  |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

## STANDARD EQUIPMENT

Air condensation with oil separator + Sanigen®

Right opening (hinges on the right)

Sunken floor

Core probe (5 points)

Fumigated wooden crate



## MF 180.2

| OPTIONAL                                                                               | PRICE        |
|----------------------------------------------------------------------------------------|--------------|
| With ramp                                                                              | \$ 1,158.00  |
| Left opening (hinges on the left)                                                      | \$ 499.00    |
| Knocked down                                                                           | \$ 1,248.00  |
| Door stop 120°                                                                         | \$ 288.00    |
| Door stop 100° (side by side equipments)                                               | \$ 288.00    |
| Sous-vide core probe                                                                   | \$ 1,068.00  |
| Additional core probe                                                                  | \$ 603.00    |
| Low temperature kit (RU version)                                                       | \$ 1,259.00  |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 59,766.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 68,015.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00    |
| Anti-Vibration feet for condensing unit                                                | \$ 341       |


### OTHER VERSIONS DIMENSIONS (in)

| RWL    | COND. U.            |
|--------|---------------------|
| width  | 47 $\frac{1}{4}$ "  |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 595 lb              |


| RWT    | COND. U.            |
|--------|---------------------|
| width  | 47 $\frac{1}{4}$ "  |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 595 lb              |

### TROLLEYS ARRANGEMENT


Available inner area 32  $\frac{1}{4}$ " X 35  $\frac{7}{16}$ "



**Type B - 2 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"



**Type C - 1 trolley**  
**Full rack**  
20,25" x 26" x h 69,5"



**Type D - 1 trolley**  
**Combi rack**  
combi oven trolley

# MF 250.2

## YIELD

|                  |        |
|------------------|--------|
| (194 °F / 37 °F) | 551 lb |
| (194 °F / 0 °F)  | 551 lb |

## TROLLEYS CAPACITY

NR

|                             |                                    |          |
|-----------------------------|------------------------------------|----------|
| <b>Type B</b><br>Slim rack  | 28,25"x18"                         | <b>2</b> |
| <b>Type C</b><br>Full rack  | 20,25"x26"                         | <b>1</b> |
| <b>Type D</b><br>Combi rack | combi oven trolley<br>(on request) | <b>1</b> |

## COND. UNIT DIMENSIONS - RU (in)

|        |          |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 60 1/8"  |
| weight | 677 lb   |

## EQUIPMENT DIMENSIONS (in)



## EQUIPMENT WEIGHT

1058 lb

## ELECTRICAL DATA

### STANDARD

### PLUS\*

### COND. U. UC250A

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 3,4 kW           | 11,2 kW          | 21,5 kW          |
| Max current absorbed  | 10,6 A           | 31,4 A           | 69,3 A           |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

## VERSION

### STANDARD

### PLUS\*

|                                 | PRICE               | PRICE                |
|---------------------------------|---------------------|----------------------|
| RU Air condensation             | <b>\$ 95,736.00</b> | <b>\$ 103,923.00</b> |
| RWL Pipeline water condensation | <b>\$ 92,605.00</b> | <b>\$ 102,069.00</b> |
| RWT Tower water condensation    | <b>\$ 92,626.00</b> | <b>\$ 102,076.00</b> |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

## STANDARD EQUIPMENT

Air condensation with oil separator + Sanigen®

Right opening (hinges on the right)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

## MF 250.2

| OPTIONAL                                                                               | PRICE        |
|----------------------------------------------------------------------------------------|--------------|
| With ramp                                                                              | \$ 1,158.00  |
| Left opening (hinges on the left)                                                      | \$ 499.00    |
| Knocked down                                                                           | \$ 1,248.00  |
| Door stop 120°                                                                         | \$ 288.00    |
| Door stop 100° (side by side equipments)                                               | \$ 288.00    |
| Sous-vide core probe                                                                   | \$ 1,068.00  |
| Additional core probe                                                                  | \$ 603.00    |
| Low temperature kit (RU version)                                                       | \$ 1,259.00  |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 61,447.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 69,605.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00    |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00    |


### OTHER VERSIONS DIMENSIONS (in)

| RWL    | COND. U.            |
|--------|---------------------|
| width  | 47 $\frac{1}{4}$ "  |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 595 lb              |


| RWT    | COND. U.            |
|--------|---------------------|
| width  | 47 $\frac{1}{4}$ "  |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 595 lb              |

### TROLLEYS ARRANGEMENT


Available inner area 32  $\frac{1}{4}$ " X 35  $\frac{1}{16}$ "



**Type B - 2 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"



**Type C - 1 trolley**  
**Full rack**  
20,25" x 26" x h 69,5"



**Type D - 1 trolley**  
**Combi rack**  
combi oven trolley

# MF 250.2 2T PASS-THRU

## YIELD

|                  |        |
|------------------|--------|
| (194 °F / 37 °F) | 551 lb |
| (194 °F / 0 °F)  | 551 lb |

## TROLLEYS CAPACITY

## NR

|                             |                                    |          |
|-----------------------------|------------------------------------|----------|
| <b>Type B</b><br>Slim rack  | 28,25"x18"                         | <b>4</b> |
| <b>Type C</b><br>Full rack  | 20,25"x26"                         | <b>2</b> |
| <b>Type D</b><br>Combi rack | combi oven trolley<br>(on request) | <b>2</b> |

## COND. UNIT DIMENSIONS - RU (in)

|        |          |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 60 1/8"  |
| weight | 677 lb   |

## EQUIPMENT DIMENSIONS (in)



## EQUIPMENT WEIGHT

1763 lb

## ELECTRICAL DATA

## STANDARD

## PLUS\*

## COND. U. UC250A

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 6,7 kW           | 22,2 kW          | 21,5 kW          |
| Max current absorbed  | 21 A             | 62 A             | 69,3 A           |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

## VERSION

## STANDARD

## PLUS\*

|     |                             | PRICE               | PRICE                |
|-----|-----------------------------|---------------------|----------------------|
| RU  | Air condensation            | <b>\$117,406.00</b> | <b>\$ 136,843.00</b> |
| RWL | Pipeline water condensation | <b>\$115,809.00</b> | <b>\$ 135,163.00</b> |
| RWT | Tower water condensation    | <b>\$115,836.00</b> | <b>\$ 135,192.00</b> |

**\* PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

## STANDARD EQUIPMENT

Air condensation with oil separator + Sanigen®

Right opening (hinges on the right)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

Knocked down

## MF 250.2 2T PASS-THRU

| OPTIONAL                                                                               | PRICE         |
|----------------------------------------------------------------------------------------|---------------|
| With ramps                                                                             | \$ 2,307.00   |
| Front door left / back door right                                                      | \$ 499.00     |
| Front door right / back door right                                                     | \$ 499.00     |
| Front door left / back door left                                                       | \$ 499.00     |
| Door stop (2 doors) 120°                                                               | \$ 288.00     |
| Door stop (2 doors) 100° (side by side equipments)                                     | \$ 288.00     |
| Sous-vide core probe                                                                   | \$ 1,068.00   |
| Additional core probe                                                                  | \$ 603.00     |
| Low temperature kit (RU version)                                                       | \$ 1,259.00   |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 95,268.00  |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 108,164.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00     |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00     |

### OTHER VERSIONS DIMENSIONS (in)

| RWL    | COND. U. |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 46 1/16" |
| weight | 595 lb   |


| RWT    | COND. U. |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 46 1/16" |
| weight | 595 lb   |

**MF 250.2 2T PASS-THRU**


**TROLLEYS ARRANGEMENT**

---


Available inner area 32 ¼"x 81 ½"

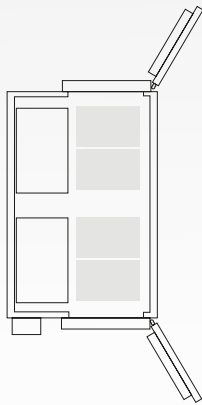

↑  
**Type B - 4 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"

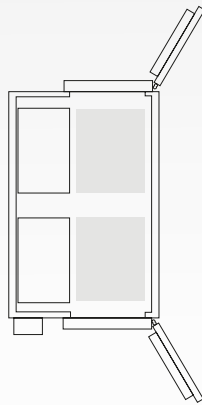

↑  
**Type C - 2 trolleys**  
**Full rack**  
20,25" x 26" x h 69,5"

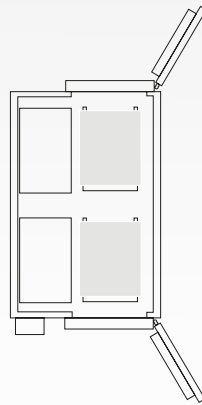

↑  
**Type D - 2 trolleys**  
**Combi rack**  
combi oven trolley

# MF 350.2 2T PASS-THRU

## EQUIPMENT DIMENSIONS (in)

### YIELD

|                  |        |
|------------------|--------|
| (194 °F / 37 °F) | 772 lb |
| (194 °F / 0 °F)  | 772 lb |

### TROLLEYS CAPACITY

NR

|                             |                                    |          |
|-----------------------------|------------------------------------|----------|
| <b>Type B</b><br>Slim rack  | 28,25"x18"                         | <b>4</b> |
| <b>Type C</b><br>Full rack  | 20,25"x26"                         | <b>2</b> |
| <b>Type D</b><br>Combi rack | combi oven trolley<br>(on request) | <b>2</b> |

### COND. UNIT DIMENSIONS - RR (in)

|        |          |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 46 1/16" |
| weight | 882 lb   |



### EQUIPMENT WEIGHT

1763 lb

### REMOTE CONDENSER DIMENSIONS - RR (in)

|        |           |
|--------|-----------|
| width  | 118 7/64" |
| depth  | 30 5/64"  |
| height | 37 9/16"  |
| weight | 341 lb    |

### ELECTRICAL DATA

#### STANDARD

#### PLUS\*

#### COND. U. UC350AST

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 6,7 kW           | 22,2 kW          | 33,8 kW          |
| Max current absorbed  | 21 A             | 62 A             | 107,9 A          |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

### VERSION

#### STANDARD

#### PLUS\*

|     |                                     |                      |                      |
|-----|-------------------------------------|----------------------|----------------------|
| RR  | Air condensation + remote condenser | <b>\$ 152,650.00</b> | <b>\$ 166,588.00</b> |
| RWT | Tower water condensation            | <b>\$ 137,859.00</b> | <b>\$ 156,645.00</b> |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

### STANDARD EQUIPMENT

Air condensation + remote condenser with oil separator + Sanigen®

Front door right opening (hinges on the right) / back door left opening (hinges on the left)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

Knocked down

## MF 350.2 2T PASS-THRU


| OPTIONAL                                                                               | PRICE         |
|----------------------------------------------------------------------------------------|---------------|
| With ramps                                                                             | \$ 2,307.00   |
| Front door left / back door right                                                      | \$ 499.00     |
| Front door right / back door right                                                     | \$ 499.00     |
| Front door left / back door left                                                       | \$ 499.00     |
| Door stop (2 doors) 120°                                                               | \$ 236.00     |
| Door stop (2 doors) 100° (side by side equipments)                                     | \$ 236.00     |
| Sous-vide core probe                                                                   | \$ 1,068.00   |
| Additional core probe                                                                  | \$ 603.00     |
| Low temperature kit (RR version)                                                       | \$ 1,058.00   |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 98,600.00  |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 110,153.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00     |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00     |

### OTHER VERSIONS DIMENSIONS (in)


| RWT    | COND. U.            |
|--------|---------------------|
| width  | 47 $\frac{1}{4}$ "  |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 848 lb              |

### TROLLEYS ARRANGEMENT


Available inner area 32  $\frac{1}{4}$ " x 81  $\frac{1}{2}$ "

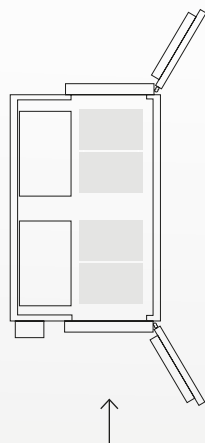

**Type B - 4 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"

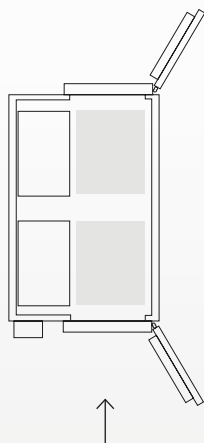

**Type C - 2 trolleys**  
**Full rack**  
20,25" x 26" x h 69,5"

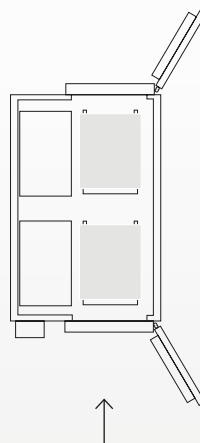

**Type D - 2 trolleys**  
**Combi rack**  
combi oven trolley



# MF 500.2 2T PASS-THRU

## EQUIPMENT DIMENSIONS (in)

### YIELD

|                  |         |
|------------------|---------|
| (194 °F / 37 °F) | 1102 lb |
| (194 °F / 0 °F)  | 1102 lb |

### TROLLEYS CAPACITY

#### NR

|                             |                                    |          |
|-----------------------------|------------------------------------|----------|
| <b>Type B</b><br>Slim rack  | 28,25"x18"                         | <b>4</b> |
| <b>Type C</b><br>Full rack  | 20,25"x26"                         | <b>2</b> |
| <b>Type D</b><br>Combi rack | combi oven trolley<br>(on request) | <b>2</b> |

### COND. UNIT DIMENSIONS - RR (in)

|        |                                   |
|--------|-----------------------------------|
| width  | 47 <sup>1</sup> / <sub>4</sub> "  |
| depth  | 53 <sup>3</sup> / <sub>16</sub> " |
| height | 46 <sup>1</sup> / <sub>16</sub> " |
| weight | 914 lb                            |



### EQUIPMENT WEIGHT

1763 lb

### REMOTE CONDENSER DIMENSIONS - RR (in)

|        |                                    |
|--------|------------------------------------|
| width  | 92 <sup>29</sup> / <sub>32</sub> " |
| depth  | 42 <sup>1</sup> / <sub>8</sub> "   |
| height | 45 <sup>15</sup> / <sub>64</sub> " |
| weight | 471 lb                             |

### ELECTRICAL DATA

#### STANDARD

#### PLUS\*

#### COND. U. UC500AST

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 6,7 kW           | 22,2 kW          | 49,5 kW          |
| Max current absorbed  | 21 A             | 62 A             | 159,7 A          |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

### VERSION

#### STANDARD

#### PLUS\*

|     |                                     |                      |                      |
|-----|-------------------------------------|----------------------|----------------------|
| RR  | Air condensation + remote condenser | <b>\$ 177,727.00</b> | <b>\$ 187,972.00</b> |
| RWT | Tower water condensation            | <b>\$ 159,236.00</b> | <b>\$ 175,310.00</b> |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

### STANDARD EQUIPMENT

Air condensation + remote condenser with oil separator + Sanigen®

Front door right opening (hinges on the right) / back door left opening (hinges on the left)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

Knocked down

## MF 500.2 2T PASS-THRU


| OPTIONAL                                                                               | PRICE         |
|----------------------------------------------------------------------------------------|---------------|
| With ramps                                                                             | \$ 2,307.00   |
| Front door left / back door right                                                      | \$ 499.00     |
| Front door right / back door right                                                     | \$ 499.00     |
| Front door left / back door left                                                       | \$ 499.00     |
| Door stop (2 doors) 120°                                                               | \$ 236.00     |
| Door stop (2 doors) 100° (side by side equipments)                                     | \$ 236.00     |
| Sous-vide core probe                                                                   | \$ 1,068.00   |
| Additional core probe                                                                  | \$ 603.00     |
| Low temperature kit (RR version)                                                       | \$ 1,058.00   |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 107,838.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 119,736.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00     |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00     |

### OTHER VERSIONS DIMENSIONS (in)


| RWT    | COND. U. |
|--------|----------|
| width  | 47 ¼"    |
| depth  | 53 ¾"    |
| height | 46 ⅙"    |
| weight | 925 lb   |

### TROLLEYS ARRANGEMENT


Available inner area 32 ¼" x 81 ½"

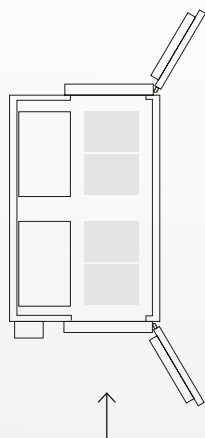

**Type B - 4 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"

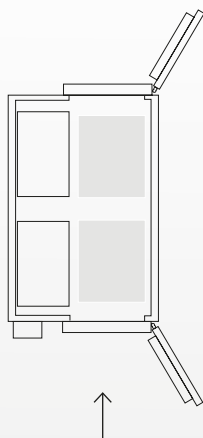

**Type C - 2 trolleys**  
**Full rack**  
20,25" x 26" x h 69,5"

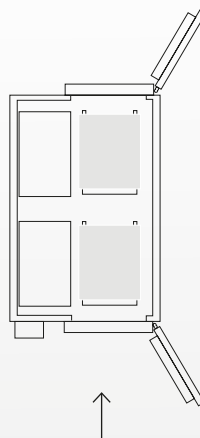

**Type D - 2 trolleys**  
**Combi rack**  
combi oven trolley

# MF 350.2 3T PASS-THRU

## EQUIPMENT DIMENSIONS (in)

### YIELD

|                |        |
|----------------|--------|
| (194°F / 37°F) | 772 lb |
| (194°F / 0°F)  | 772 lb |

### TROLLEYS CAPACITY

#### NR

|                              |                                    |          |
|------------------------------|------------------------------------|----------|
| <b>Type B<br/>Slim rack</b>  | 28,25"x18"                         | <b>6</b> |
| <b>Type C<br/>Full rack</b>  | 20,25"x26"                         | <b>3</b> |
| <b>Type D<br/>Combi rack</b> | combi oven trolley<br>(on request) | <b>3</b> |

### COND. UNIT DIMENSIONS - RR (in)

|        |          |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 46 1/16" |
| weight | 882 lb   |



### EQUIPMENT WEIGHT

2645 lb

### REMOTE CONDENSER DIMENSIONS - RR (in)

|        |           |
|--------|-----------|
| width  | 118 7/64" |
| depth  | 30 5/64"  |
| height | 37 9/16"  |
| weight | 341 lb    |

### ELECTRICAL DATA

#### STANDARD

#### PLUS\*

#### COND. U. UC350AST

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 10,1kW           | 33,1 kW          | 33,8 kW          |
| Max current absorbed  | 31,3 A           | 92,7 A           | 107,9 A          |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

### VERSION

#### STANDARD

#### PLUS\*

|     |                                     |                      |                      |
|-----|-------------------------------------|----------------------|----------------------|
| RR  | Air condensation + remote condenser | <b>\$ 171,593.00</b> | <b>\$ 189,290.00</b> |
| RWT | Tower water condensation            | <b>\$ 162,519.00</b> | <b>\$ 180,305.00</b> |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

### STANDARD EQUIPMENT

Air condensation + remote condenser with oil separator + Sanigen®

Front door right opening (hinges on the right) / back door left opening (hinges on the left)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

Knocked down

## MF 350.2 3T PASS-THRU


| OPTIONAL                                                                               | PRICE         |
|----------------------------------------------------------------------------------------|---------------|
| With ramps                                                                             | \$ 2,307.00   |
| Front door left / back door right                                                      | \$ 499.00     |
| Front door right / back door right                                                     | \$ 499.00     |
| Front door left / back door left                                                       | \$ 499.00     |
| Door stop (2 doors) 120°                                                               | \$ 236.00     |
| Door stop (2 doors) 100° (side by side equipments)                                     | \$ 236.00     |
| Sous-vide core probe                                                                   | \$ 1,068.00   |
| Additional core probe                                                                  | \$ 603.00     |
| Low temperature kit (RR version)                                                       | \$ 1,058.00   |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 115,668.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 133,472.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00     |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00     |

### OTHER VERSIONS DIMENSIONS (in)

| RWT    | COND. U. |
|--------|----------|
| width  | 47 ¼"    |
| depth  | 53 ¾"    |
| height | 46 ⅙"    |
| weight | 848 lb   |

### TROLLEYS ARRANGEMENT

Available inner area 32 ¼" x 127 ⅙"

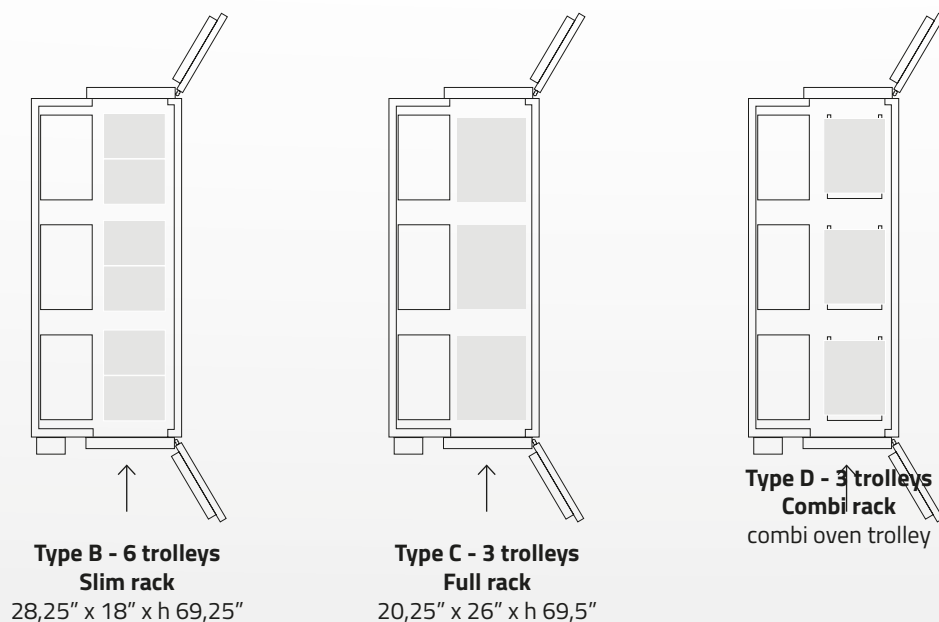

# MF 500.2 3T PASS-THRU

## EQUIPMENT DIMENSIONS (in)

### YIELD

|                  |         |
|------------------|---------|
| (194 °F / 37 °F) | 1102 lb |
| (194 °F / 0 °F)  | 1102 lb |


### TROLLEYS CAPACITY

NR

|                                    |                                    |          |
|------------------------------------|------------------------------------|----------|
| <b>Type B</b><br><b>Slim rack</b>  | 28,25"x18"                         | <b>6</b> |
| <b>Type C</b><br><b>Full rack</b>  | 20,25"x26"                         | <b>3</b> |
| <b>Type D</b><br><b>Combi rack</b> | combi oven trolley<br>(on request) | <b>3</b> |

### COND. UNIT DIMENSIONS - RR (in)

|        |                                   |
|--------|-----------------------------------|
| width  | 47 <sup>1</sup> / <sub>4</sub> "  |
| depth  | 53 <sup>3</sup> / <sub>16</sub> " |
| height | 46 <sup>1</sup> / <sub>16</sub> " |
| weight | 914 lb                            |

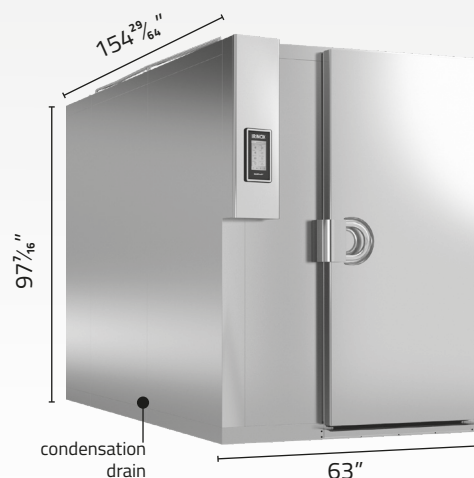

### EQUIPMENT WEIGHT

2645 lb

### REMOTE CONDENSER DIMENSIONS - RR (in)

|        |                                    |
|--------|------------------------------------|
| width  | 92 <sup>29</sup> / <sub>32</sub> " |
| depth  | 42 <sup>1</sup> / <sub>8</sub> "   |
| height | 45 <sup>15</sup> / <sub>64</sub> " |
| weight | 471 lb                             |

### ELECTRICAL DATA

#### STANDARD

#### PLUS\*

#### COND. U. UC500AST

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 10,1kW           | 33,1 kW          | 49,5 kW          |
| Max current absorbed  | 31,3 A           | 92,7 A           | 159,7 A          |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

### VERSION

#### STANDARD

#### PLUS\*

|     |                                     |                      |                      |
|-----|-------------------------------------|----------------------|----------------------|
| RR  | Air condensation + remote condenser | <b>\$ 203,814.00</b> | <b>\$ 215,148.00</b> |
| RWT | Tower water condensation            | <b>\$ 170,582.00</b> | <b>\$ 203,336.00</b> |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

### STANDARD EQUIPMENT

Air condensation + remote condenser with oil separator + Sanigen®

Front door right opening (hinges on the right) / back door left opening (hinges on the left)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

Knocked down

## MF 500.2 3T PASS-THRU


| OPTIONAL                                                                               | PRICE         |
|----------------------------------------------------------------------------------------|---------------|
| With ramps                                                                             | \$ 2,307.00   |
| Front door left / back door right                                                      | \$ 499.00     |
| Front door right / back door right                                                     | \$ 499.00     |
| Front door left / back door left                                                       | \$ 499.00     |
| Door stop (2 doors) 120°                                                               | \$ 236.00     |
| Door stop (2 doors) 100° (side by side equipments)                                     | \$ 236.00     |
| Sous-vide core probe                                                                   | \$ 1,068.00   |
| Additional core probe                                                                  | \$ 603.00     |
| Low temperature kit (RR version)                                                       | \$ 1,349.00   |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 133,926.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 153,024.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00     |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00     |

### OTHER VERSIONS DIMENSIONS (in)


| RWT    | COND. U. |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 46 1/16" |
| weight | 925 lb   |

### TROLLEYS ARRANGEMENT


Available inner area 32 1/4" x 127 9/16"

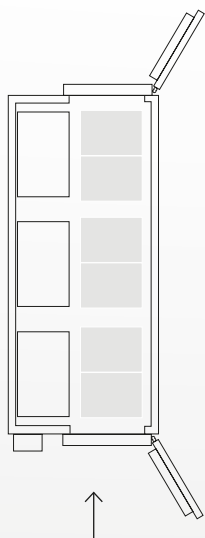

**Type B - 6 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"

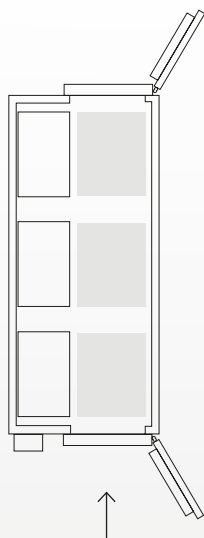

**Type C - 3 trolleys**  
**Full rack**  
20,25" x 26" x h 69,5"

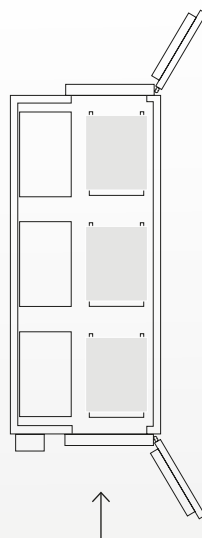

**Type D - 3 trolleys**  
**Combi rack**  
combi oven trolley

# MF 750.2 3T PASS-THRU

## YIELD

|                  |         |
|------------------|---------|
| (194 °F / 37 °F) | 1653 lb |
| (194 °F / 0 °F)  | 1653 lb |

## TROLLEYS CAPACITY

## NR

|                                    |                                    |          |
|------------------------------------|------------------------------------|----------|
| <b>Type B</b><br><b>Slim rack</b>  | 28,25"x18"                         | <b>6</b> |
| <b>Type C</b><br><b>Full rack</b>  | 20,25"x26"                         | <b>3</b> |
| <b>Type D</b><br><b>Combi rack</b> | combi oven trolley<br>(on request) | <b>3</b> |

## COND. UNIT DIMENSIONS - RR (in)

|        |         |
|--------|---------|
| width  | 47 1/4" |
| depth  | 94 1/4" |
| height | 48 1/2" |
| weight | 1322 lb |

## EQUIPMENT DIMENSIONS (in)



## EQUIPMENT WEIGHT

2645 lb

## REMOTE CONDENSER DIMENSIONS - RR (in)

|        |            |
|--------|------------|
| width  | 189 31/64" |
| depth  | 52 9/32"   |
| height | 54 5/8"    |
| weight | 1205 lb    |

## ELECTRICAL DATA

## STANDARD

## PLUS\*

## COND. U. UC750AST

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 10,1kW           | 33,1 kW          | 68,6 kW          |
| Max current absorbed  | 31,3 A           | 92,7 A           | 234,5 A          |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

## VERSION

## STANDARD

## PLUS\*

|     |                                     |                      |                      |
|-----|-------------------------------------|----------------------|----------------------|
| RR  | Air condensation + remote condenser | <b>\$ 216,709.00</b> | <b>\$ 219,717.00</b> |
| RWT | Tower water condensation            | <b>\$ 174,398.00</b> | <b>\$ 190,726.00</b> |

\* **PLUS version:** Sanigen® / thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

## STANDARD EQUIPMENT

Air condensation + remote condenser with oil separator + Sanigen®

Front door right opening (hinges on the right) / back door left opening (hinges on the left)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

Knocked down

## MF 750.2 3T PASS THRU


| OPTIONAL                                                                               | PRICE         |
|----------------------------------------------------------------------------------------|---------------|
| With ramps                                                                             | \$ 2,307.00   |
| Front door left / back door right                                                      | \$ 499.00     |
| Front door right / back door right                                                     | \$ 499.00     |
| Front door left / back door left                                                       | \$ 499.00     |
| Door stop (2 doors) 120°                                                               | \$ 236.00     |
| Door stop (2 doors) 100° (side by side equipments)                                     | \$ 236.00     |
| Sous-vide core probe                                                                   | \$ 1,068.00   |
| Additional core probe                                                                  | \$ 603.00     |
| Low temperature kit (RR version)                                                       | \$ 2,007.00   |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$122,157.00  |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 140,298.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00     |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00     |

### OTHER VERSIONS DIMENSIONS (in)


| RWT    | COND. U. |
|--------|----------|
| width  | 47 ¼"    |
| depth  | 94 ¼"    |
| height | 48 ½"    |
| weight | 1322 lb  |

### TROLLEYS ARRANGEMENT


Available inner area 32 ¼"x 127 ⅞"

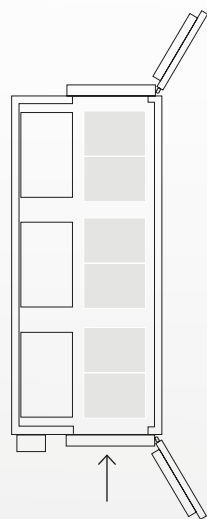

**Type B - 6 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"

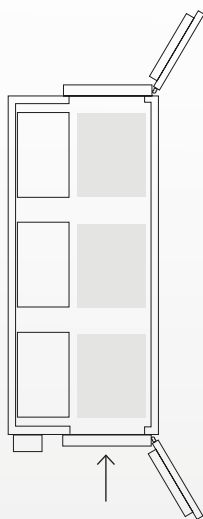

**Type C - 3 trolleys**  
**Full rack**  
20,25" x 26" x h 69,5"

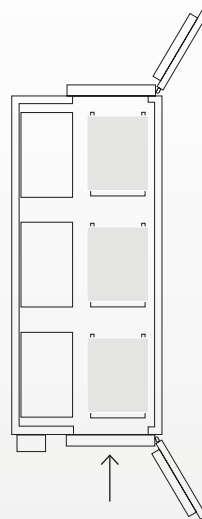

**Type D - 3 trolleys**  
**Combi rack**  
combi oven trolley



# MF 750.2 4T PASS-THRU

## YIELD

|                |         |
|----------------|---------|
| (194°F / 37°F) | 1653 lb |
| (194°F / 0°F)  | 1653 lb |

## TROLLEYS CAPACITY


NR

|                                    |                                    |          |
|------------------------------------|------------------------------------|----------|
| <b>Type B</b><br><b>Slim rack</b>  | 28,25"x18"                         | <b>8</b> |
| <b>Type C</b><br><b>Full rack</b>  | 20,25"x26"                         | <b>4</b> |
| <b>Type D</b><br><b>Combi rack</b> | combi oven trolley<br>(on request) | <b>4</b> |

## COND. UNIT DIMENSIONS - RR (in)

|        |          |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 94 1/4"  |
| height | 48 1/32" |
| weight | 1322 lb  |

## EQUIPMENT DIMENSIONS (in)

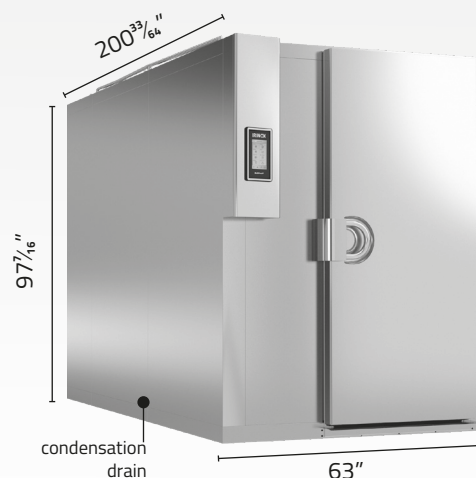

## EQUIPMENT WEIGHT

3527 lb

## REMOTE CONDENSER DIMENSIONS - RR (in)

|        |            |
|--------|------------|
| width  | 189 31/64" |
| depth  | 52 9/32"   |
| height | 59 39/64"  |
| weight | 1205 lb    |

## ELECTRICAL DATA

### STANDARD

### PLUS\*

### COND. U. UC750AST

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 13,4kW           | 44,1 kW          | 68,6 kW          |
| Max current absorbed  | 41,6 A           | 123,3 A          | 234,5 A          |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

## VERSION

### STANDARD

### PLUS\*

|     |                                     |                      |                      |
|-----|-------------------------------------|----------------------|----------------------|
| RR  | Air condensation + remote condenser | <b>\$ 263,184.00</b> | <b>\$ 284,614.00</b> |
| RWT | Tower water condensation            | <b>\$ 232,874.00</b> | <b>\$ 269,649.00</b> |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

## STANDARD EQUIPMENT

Air condensation + remote condenser with oil separator + Sanigen®

Front door right opening (hinges on the right) / back door left opening (hinges on the left)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

Knocked down

## MF 750.2 4T

| OPTIONAL                                                                               | PRICE         |
|----------------------------------------------------------------------------------------|---------------|
| With ramps                                                                             | \$ 4,716.00   |
| Front door left / back door right                                                      | \$ 499.00     |
| Front door right / back door right                                                     | \$ 499.00     |
| Front door left / back door left                                                       | \$ 499.00     |
| Door stop (2 doors) 120°                                                               | \$ 240.00     |
| Door stop (2 doors) 100° (side by side equipments)                                     | \$ 240.00     |
| Sous-vide core probe                                                                   | \$ 1,068.00   |
| Additional core probe                                                                  | \$ 603.00     |
| Low temperature kit (RR version)                                                       | \$ 2,007.00   |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 176,745.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 201,915.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00     |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00     |


### OTHER VERSIONS DIMENSIONS (in)

| RWT    | COND. U. |
|--------|----------|
| width  | 47 ¼"    |
| depth  | 94 ¼"    |
| height | 48 ½"    |
| weight | 1322 lb  |


**MF 750.2 4T**

**TROLLEYS ARRANGEMENT**


Available inner area 32 1/4" x 173 5/8"

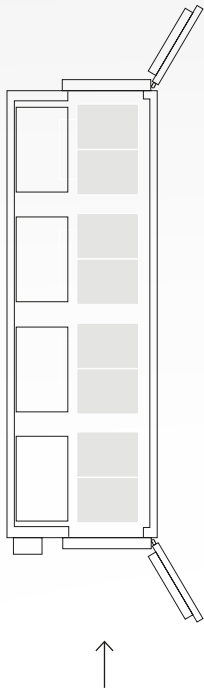

**Type B - 8 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"

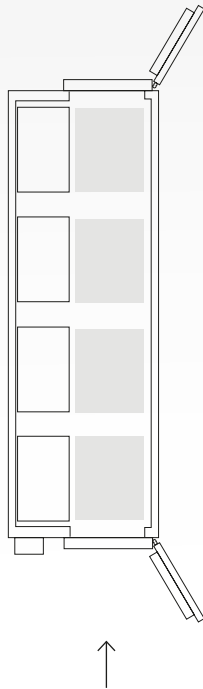

**Type C - 4 trolleys**  
**Full rack**  
20,25" x 26" x h 69,5"

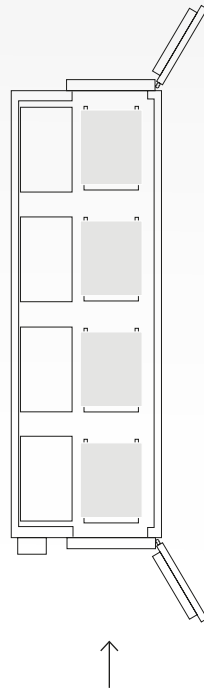


**Type D - 4 trolleys**  
**Combi rack**  
combi oven trolley

# MF 180.2 L

LARGE

## EQUIPMENT DIMENSIONS (in)

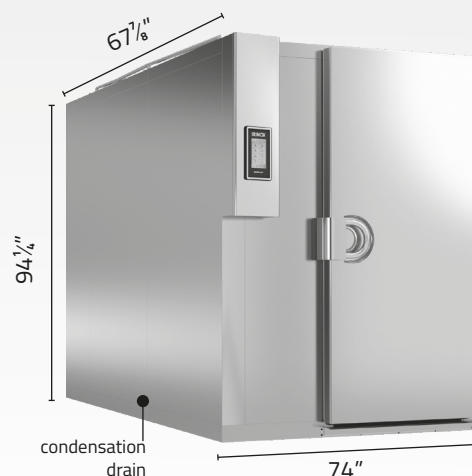

### YIELD

|                  |        |
|------------------|--------|
| (194 °F / 37 °F) | 396 lb |
| (194 °F / 0 °F)  | 396 lb |

### TROLLEYS CAPACITY

NR

|                          |                                 |          |
|--------------------------|---------------------------------|----------|
| <b>Type B Slim rack</b>  | 28,25"x18"                      | <b>3</b> |
| <b>Type C Full rack</b>  | 20,25"x26"                      | <b>3</b> |
| <b>Type D Combi rack</b> | combi oven trolley (on request) | <b>2</b> |

### COND. UNIT DIMENSIONS - RU (in)

|        |          |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 60 1/8"  |
| weight | 677 lb   |

### EQUIPMENT WEIGHT

1322 lb

| ELECTRICAL DATA       | STANDARD         | PLUS*            | COND. U. UC180A  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 3 kW             | 11,2 kW          | 19,1 kW          |
| Max current absorbed  | 10 A             | 31,4 A           | 62,4 A           |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

| VERSION                         | STANDARD             | PLUS*                |
|---------------------------------|----------------------|----------------------|
|                                 | PRICE                | PRICE                |
| RU Air condensation             | <b>\$ 104,745.00</b> | <b>\$ 111,204.00</b> |
| RWL Pipeline water condensation | <b>\$ 104,028.00</b> | <b>\$ 110,488.00</b> |
| RWT Tower water condensation    | <b>\$ 104,049.00</b> | <b>\$110,511.00</b>  |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

### STANDARD EQUIPMENT

Air condensation with oil separator + Sanigen®

Right opening (hinges on the right)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

## MF 180.2 L LARGE

| OPTIONAL                                                                               | PRICE        |
|----------------------------------------------------------------------------------------|--------------|
| With ramp                                                                              | \$ 1,557.00  |
| Left opening (hinges on the left)                                                      | \$ 499.00    |
| Knocked down                                                                           | \$ 1,360.00  |
| Door stop 120°                                                                         | \$ 236.00    |
| Door stop 100° (side by side equipments)                                               | \$ 236.00    |
| Sous-vide core probe                                                                   | \$ 1,068.00  |
| Additional core probe                                                                  | \$ 603.00    |
| Low temperature kit (RU version)                                                       | \$ 1,259.00  |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 70,624.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 77,085.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00    |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00    |


### OTHER VERSIONS DIMENSIONS (in)

| RWL    | COND. U.            |
|--------|---------------------|
| width  | 47 $\frac{1}{4}$ "  |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 595 lb              |


| RWT    | COND. U.            |
|--------|---------------------|
| width  | 47 $\frac{1}{4}$ "  |
| depth  | 53 $\frac{3}{16}$ " |
| height | 46 $\frac{1}{16}$ " |
| weight | 595 lb              |

### TROLLEYS ARRANGEMENT


Available inner area 43  $\frac{5}{16}$ " X 47  $\frac{1}{4}$ "



**Type B - 3 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"



**Type C - 3 trolley**  
**Full rack**  
20,25" x 26" x h 69,5"



**Type D - 2 trolleys**  
**Combi rack**  
combi oven trolley

# MF 350.2 2T L

PASS-THRU LARGE

## EQUIPMENT DIMENSIONS (in)

### YIELD

|                |        |
|----------------|--------|
| (194°F / 37°F) | 772 lb |
| (194°F / 0°F)  | 772 lb |

### TROLLEYS CAPACITY

NR

|                            |            |          |
|----------------------------|------------|----------|
| <b>Type B</b><br>Slim rack | 28,25"x18" | <b>6</b> |
|----------------------------|------------|----------|

|                            |            |          |
|----------------------------|------------|----------|
| <b>Type C</b><br>Full rack | 20,25"x26" | <b>6</b> |
|----------------------------|------------|----------|

|                             |                                    |          |
|-----------------------------|------------------------------------|----------|
| <b>Type D</b><br>Combi rack | combi oven trolley<br>(on request) | <b>4</b> |
|-----------------------------|------------------------------------|----------|



### EQUIPMENT WEIGHT

2204 lb

### COND. UNIT DIMENSIONS - RR (in)

|        |          |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 46 1/16" |
| weight | 882 lb   |

### REMOTE CONDENSER DIMENSIONS - RR (in)

|        |           |
|--------|-----------|
| width  | 118 7/16" |
| depth  | 30 5/16"  |
| height | 37 9/16"  |
| weight | 341 lb    |

### ELECTRICAL DATA

#### STANDARD

#### PLUS\*

#### COND. U. UC350AST

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 6,7 kW           | 22,2 kW          | 33,8 kW          |
| Max current absorbed  | 21 A             | 62 A             | 107,9 A          |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

### VERSION

#### STANDARD

#### PLUS\*

|     |                                     |                      |                      |
|-----|-------------------------------------|----------------------|----------------------|
| RR  | Air condensation + remote condenser | <b>\$ 163,378.00</b> | <b>\$ 175,629.00</b> |
| RWT | Tower water condensation            | <b>\$ 153,954.00</b> | <b>\$ 166,186.00</b> |

**\* PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

### STANDARD EQUIPMENT

Air condensation + remote condenser with oil separator + Sanigen®

Front door right opening (hinges on the right) / back door left opening (hinges on the left)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

Knocked down

**MF 350.2 2T L PASS THRU - LARGE**

| <b>OPTIONAL</b>                                                                        | <b>PRICE</b>         |
|----------------------------------------------------------------------------------------|----------------------|
| With ramps                                                                             | <b>\$ 3,113.00</b>   |
| Front door left / back door right                                                      | <b>\$ 499.00</b>     |
| Front door right / back door right                                                     | <b>\$ 499.00</b>     |
| Front door left / back door left                                                       | <b>\$ 499.00</b>     |
| Door stop (2 doors) 120°                                                               | <b>\$ 240.00</b>     |
| Door stop (2 doors) 100° (side by side equipments)                                     | <b>\$ 240.00</b>     |
| Sous-vide core probe                                                                   | <b>\$ 1,068.00</b>   |
| Additional core probe                                                                  | <b>\$ 603.00</b>     |
| Low temperature kit (RR version)                                                       | <b>\$ 1,058.00</b>   |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | <b>\$ 107,061.00</b> |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | <b>\$ 118,175.00</b> |
| Kit software + router + USB HACCP MyA                                                  | <b>\$ 245.00</b>     |
| Anti-Vibration feet for condensing unit                                                | <b>\$ 341.00</b>     |


MF 350.2 2T L

OTHER VERSIONS DIMENSIONS (in)


| RWT    | COND. U. |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 46 1/16" |
| weight | 848 lb   |

TROLLEYS ARRANGEMENT


Available inner area 43 5/16" x 105 1/8"

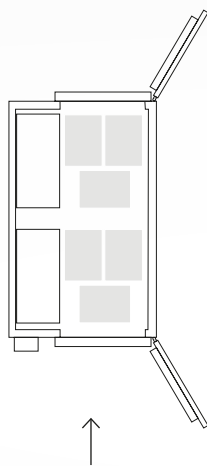

**Type B - 6 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"

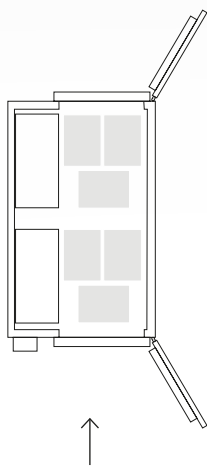

**Type C - 6 trolleys**  
**Full rack**  
20,25" x 26" x h 69,5"

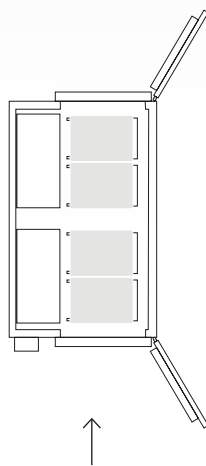

**Type D - 4 trolleys**  
**Combi rack**  
combi oven trolley



# MF 500.2 3T L

PASS-THRU LARGE

## EQUIPMENT DIMENSIONS (in)

### YIELD

|                  |         |
|------------------|---------|
| (194 °F / 37 °F) | 1102 lb |
| (194 °F / 0 °F)  | 1102 lb |

### TROLLEYS CAPACITY

NR

|                                    |                                    |          |
|------------------------------------|------------------------------------|----------|
| <b>Type B</b><br><b>Slim rack</b>  | 28,25"x18"                         | <b>9</b> |
| <b>Type C</b><br><b>Full rack</b>  | 20,25"x26"                         | <b>9</b> |
| <b>Type D</b><br><b>Combi rack</b> | combi oven trolley<br>(on request) | <b>6</b> |



### COND. UNIT DIMENSIONS - RR (in)

|        |          |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 53 3/16" |
| height | 46 1/16" |
| weight | 914 lb   |

### EQUIPMENT WEIGHT

3086 lb

### REMOTE CONDENSER DIMENSIONS - RR (in)

|        |           |
|--------|-----------|
| width  | 92 29/32" |
| depth  | 42 1/8"   |
| height | 45 15/64" |
| weight | 471 lb    |

### ELECTRICAL DATA

#### STANDARD

#### PLUS\*

#### COND. U. UC500AST

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 10,1kW           | 33,1 kW          | 49,3 kW          |
| Max current absorbed  | 31,3 A           | 92,7 A           | 159,7 A          |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

### VERSION

#### STANDARD

#### PLUS\*

|     |                                     |                      |                      |
|-----|-------------------------------------|----------------------|----------------------|
| RR  | Air condensation + remote condenser | <b>\$ 210,888.00</b> | <b>\$ 228,674.00</b> |
| RWT | Tower water condensation            | <b>\$ 199,732.00</b> | <b>\$ 217,518.00</b> |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

### STANDARD EQUIPMENT

Air condensation + remote condenser with oil separator + Sanigen®

Front door right opening (hinges on the right) / back door left opening (hinges on the left)

Sunken floor

Core probe (5 points)

Fumigated wooden crate

Knocked down

## MF 500.2 3T L

| OPTIONAL                                                                               | PRICE         |
|----------------------------------------------------------------------------------------|---------------|
| With ramps                                                                             | \$ 3,113.00   |
| Front door left / back door right                                                      | \$ 499.00     |
| Front door right / back door right                                                     | \$ 499.00     |
| Front door left / back door left                                                       | \$ 499.00     |
| Door stop (2 doors) 120°                                                               | \$ 240.00     |
| Door stop (2 doors) 100° (side by side equipments)                                     | \$ 240.00     |
| Sous-vide core probe                                                                   | \$ 1,068.00   |
| Additional core probe                                                                  | \$ 603.00     |
| Low temperature kit (RR version)                                                       | \$ 1,349.00   |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 165,024.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 184,589.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00     |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00     |


### OTHER VERSIONS DIMENSIONS (in)

| RWT    | COND. U. |
|--------|----------|
| width  | 47 ¼"    |
| depth  | 53 ¾"    |
| height | 46 ⅞"    |
| weight | 925 lb   |


## TROLLEYS ARRANGEMENT

---


Available inner area 32 1/4" x 163"

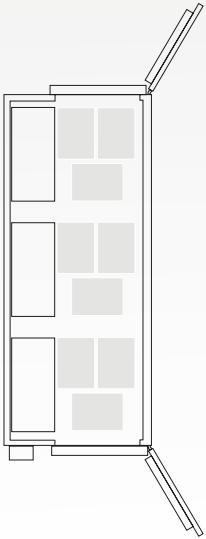

↑  
**Type B - 9 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"

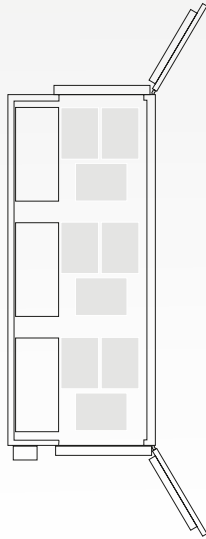

↑  
**Type C - 9 trolleys**  
**Full rack**  
20,25" x 26" x h 69,5"

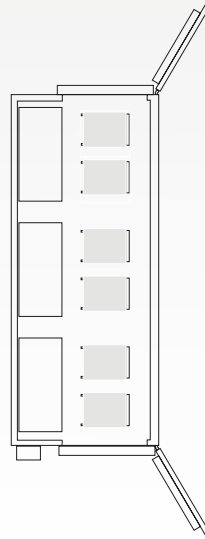

↑  
**Type D - 6 trolleys**  
**Combi rack**  
combi oven trolley

# MF 750.2 4T L

PASS-THRU LARGE

## EQUIPMENT DIMENSIONS (in)

### YIELD

|                  |         |
|------------------|---------|
| (194 °F / 37 °F) | 1653 lb |
| (194 °F / 0 °F)  | 1653 lb |


### TROLLEYS CAPACITY

NR

|                                    |                                    |           |
|------------------------------------|------------------------------------|-----------|
| <b>Type B</b><br><b>Slim rack</b>  | 28,25"x18"                         | <b>12</b> |
| <b>Type C</b><br><b>Full rack</b>  | 20,25"x26"                         | <b>12</b> |
| <b>Type D</b><br><b>Combi rack</b> | combi oven trolley<br>(on request) | <b>8</b>  |

### COND. UNIT DIMENSIONS - RR (in)

|        |          |
|--------|----------|
| width  | 47 1/4"  |
| depth  | 94 1/4"  |
| height | 48 1/32" |
| weight | 1322 lb  |

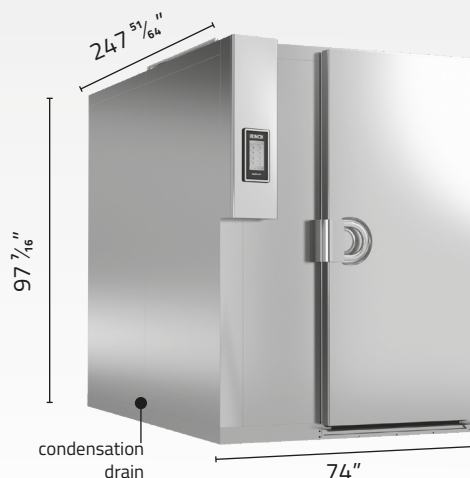

### EQUIPMENT WEIGHT

3968 lb

### REMOTE CONDENSER DIMENSIONS - RR (in)

|        |            |
|--------|------------|
| width  | 189 31/64" |
| depth  | 52 9/32"   |
| height | 59 39/64"  |
| weight | 1205 lb    |

### ELECTRICAL DATA

#### STANDARD

#### PLUS\*

#### COND. U. UC750AST

|                       |                  |                  |                  |
|-----------------------|------------------|------------------|------------------|
| Max power consumption | 13,4kW           | 44,1 kW          | 68,6 kW          |
| Max current absorbed  | 41,6 A           | 123,3 A          | 234,5 A          |
| Voltage               | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) | 208 V-60Hz (3Ph) |

### VERSION

#### STANDARD

#### PLUS\*

|     |                                     |                      |                      |
|-----|-------------------------------------|----------------------|----------------------|
| RR  | Air condensation + remote condenser | <b>\$ 293,614.00</b> | <b>\$ 314,370.00</b> |
| RWT | Tower water condensation            | <b>\$ 262,750.00</b> | <b>\$ 283,937.00</b> |

\* **PLUS version:** thawing / proofing / low temperature cooking / regeneration / holding / chocolate / pasteurization included.

### STANDARD EQUIPMENT

Air condensation + remote condenser with oil separator + Sanigen®

Front door right opening (hinges on the right) / back door left opening (hinges on the left)

Sunken floor

Knocked Down

Core probe (5 points)

Fumigated wooden crate

## MF 750.2 4T L

| OPTIONAL                                                                               | PRICE         |
|----------------------------------------------------------------------------------------|---------------|
| With ramps                                                                             | \$ 2,141.00   |
| Front door left / back door right                                                      | \$ 499.00     |
| Front door right / back door right                                                     | \$ 499.00     |
| Front door left / back door left                                                       | \$ 499.00     |
| Door stop (2 doors) 120°                                                               | \$ 240.00     |
| Door stop (2 doors) 100° (side by side equipments)                                     | \$ 240.00     |
| Sous-vide core probe                                                                   | \$ 1,068.00   |
| Additional core probe                                                                  | \$ 603.00     |
| Low temperature kit (RR version)                                                       | \$ 2,006.00   |
| Without condensing unit (STANDARD Version)<br>(with fumigated wooden crate) + Sanigen® | \$ 212,530.00 |
| Without condensing unit (PLUS Version) (with fumigated wooden crate)<br>+ Sanigen®     | \$ 236,731.00 |
| Kit software + router + USB HACCP MyA                                                  | \$ 245.00     |
| Anti-Vibration feet for condensing unit                                                | \$ 341.00     |

### OTHER VERSIONS DIMENSIONS (in)


| RWT    | COND. U. |
|--------|----------|
| width  | 47 ¼"    |
| depth  | 94 ¼"    |
| height | 48 ½"    |
| weight | 1322 lb  |

**MF 750.2 4T L**


**TROLLEYS ARRANGEMENT**

---


Available inner area 32 ¼" x 173 ⅝"

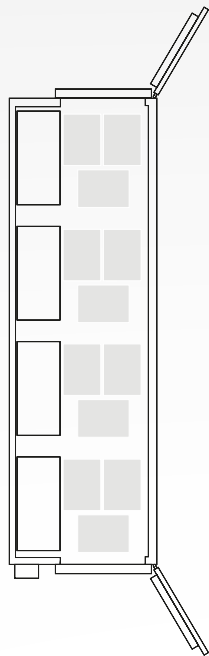

↑  
**Type B - 12 trolleys**  
**Slim rack**  
28,25" x 18" x h 69,25"

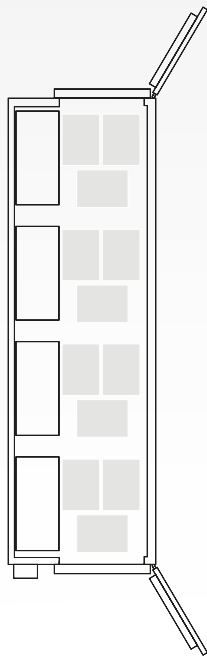

↑  
**Type C - 12 trolleys**  
**Full rack**  
20,25" x 26" x h 69,5"

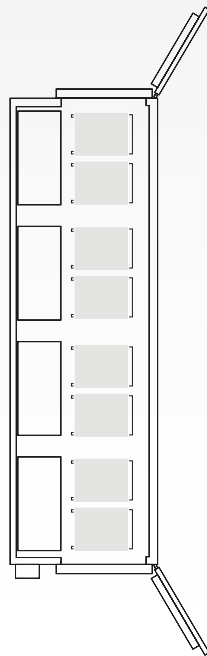

↑  
**Type D - 8 trolleys**  
**Combi rack**  
combi oven trolley





**IRINOX NORTH AMERICA**

Headquarters  
9990 NW 14th Street, Suite 107  
Doral, FL - 33172  
P. (+1) 786 870 5064  
F. (+1) 786 391 2467  
[info@irinoxnorthamerica.com](mailto:info@irinoxnorthamerica.com)  
[www.irinoxnorthamerica.com](http://www.irinoxnorthamerica.com)

**Reps North America**

cod. 4400847  
01/2019