



60 ft. Mast Antenna

Part Number: SLF10057


SPECIFICATION SHEET

5055 Belmont, Beaumont, TX 77707

Phone +409.842.1717

Fax +409.842.2987

sales@southernavionics.com

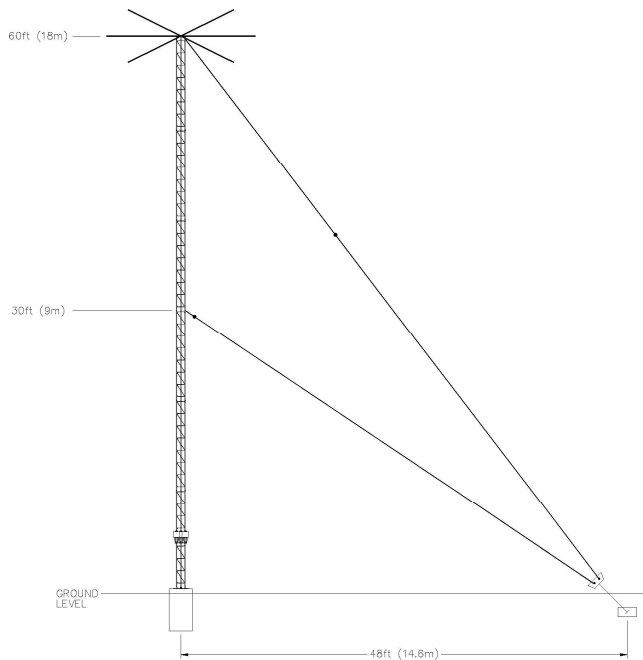


FEATURE	SPECIFICATION
Resistance	2-30 Ohms, 10 Ohms typical
Max Power Rating	1000 Watts PEP / 250 Watts carrier power at 100% amplitude modulation
Capacitance	429pF standard
Frequency of Operation	190 - 650 kHz
Polarization	Vertical
Pattern	Omni-directional
Antenna Gain	-9 dBi@ 300 kHz
Electrical Length	44 ft. (13.4m)
Wind Rating	130 mph (209km/hr)
Height	60 ft. (18m)
Weight	375 lbs. (170Kg)
Sections	Five (5) 10 ft. (3m) sections, two (2) 5 ft. (1.5m) RF insulator sections
Finish	Galvanized steel to ASTM A123
Temperature Range	-50°C - +70°C
Base Pier Rating	14000 lbf. (62275N)
16 Radial Ground System	1100 ft. (335m) of #10 AWG soft-drawn copper wire, 17 6 ft. (2m) ground rods, ground clamps, associated hardware
Optional Equipment	Installation Kit, Antenna Simulator, Enhanced Counterpoise SLF87720, Obstruction LED kit SLJ00204

*Information provided is subject to change without notice



Mechanical:


The antenna is made of 5, 10 ft. (2m) galvanized steel sections configured on 12.5 in (32cm) equilateral triangular design with electrically welded continuous steel “zigzag” cross bracing. 2, 5 ft. (1.5m) RF insulator sections are also provided. The lattice tower sections are designed in accordance with U.S. National Standard ANSI/EIA-222 F.

Three (3) high voltage insulators are used to isolate the radiator from the ground. Rain shields are included to prevent water sheeting during heavy rain. Three top-loading element guy wires are used to develop and enhance antenna capacitance.

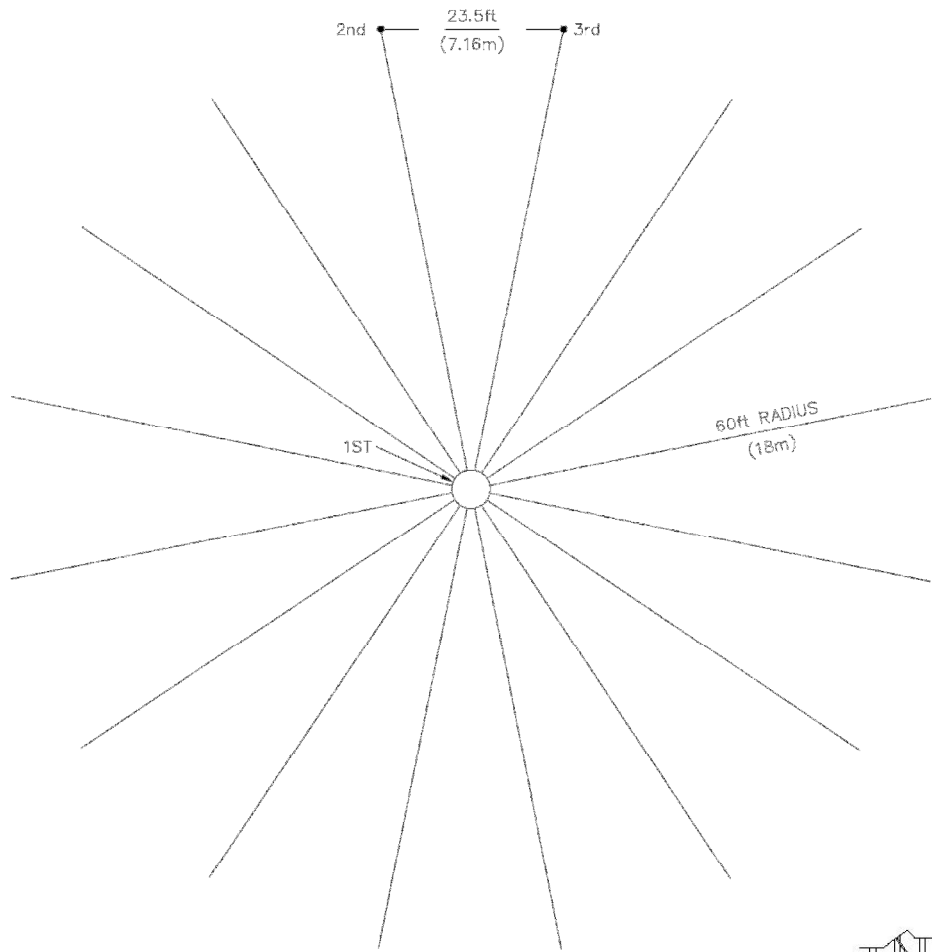


16 Radial Counterpoise Diagram

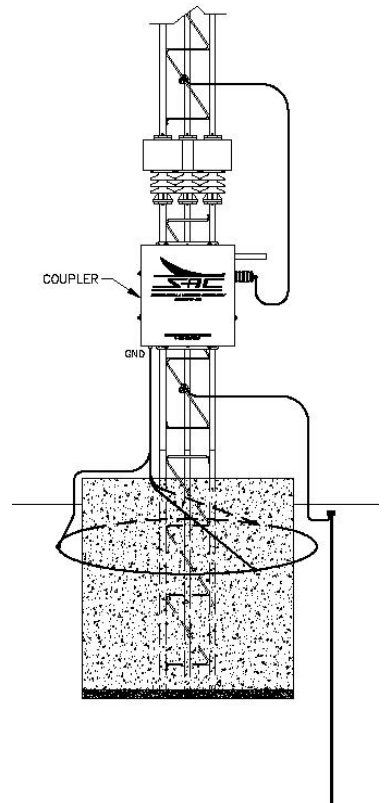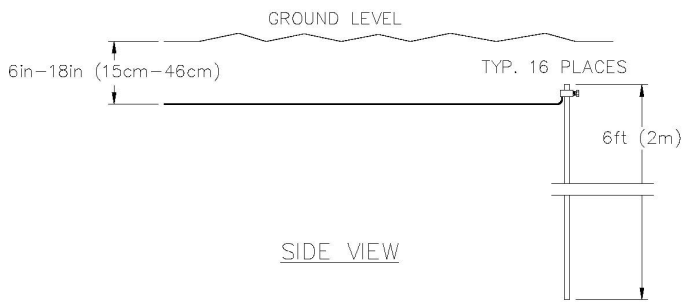

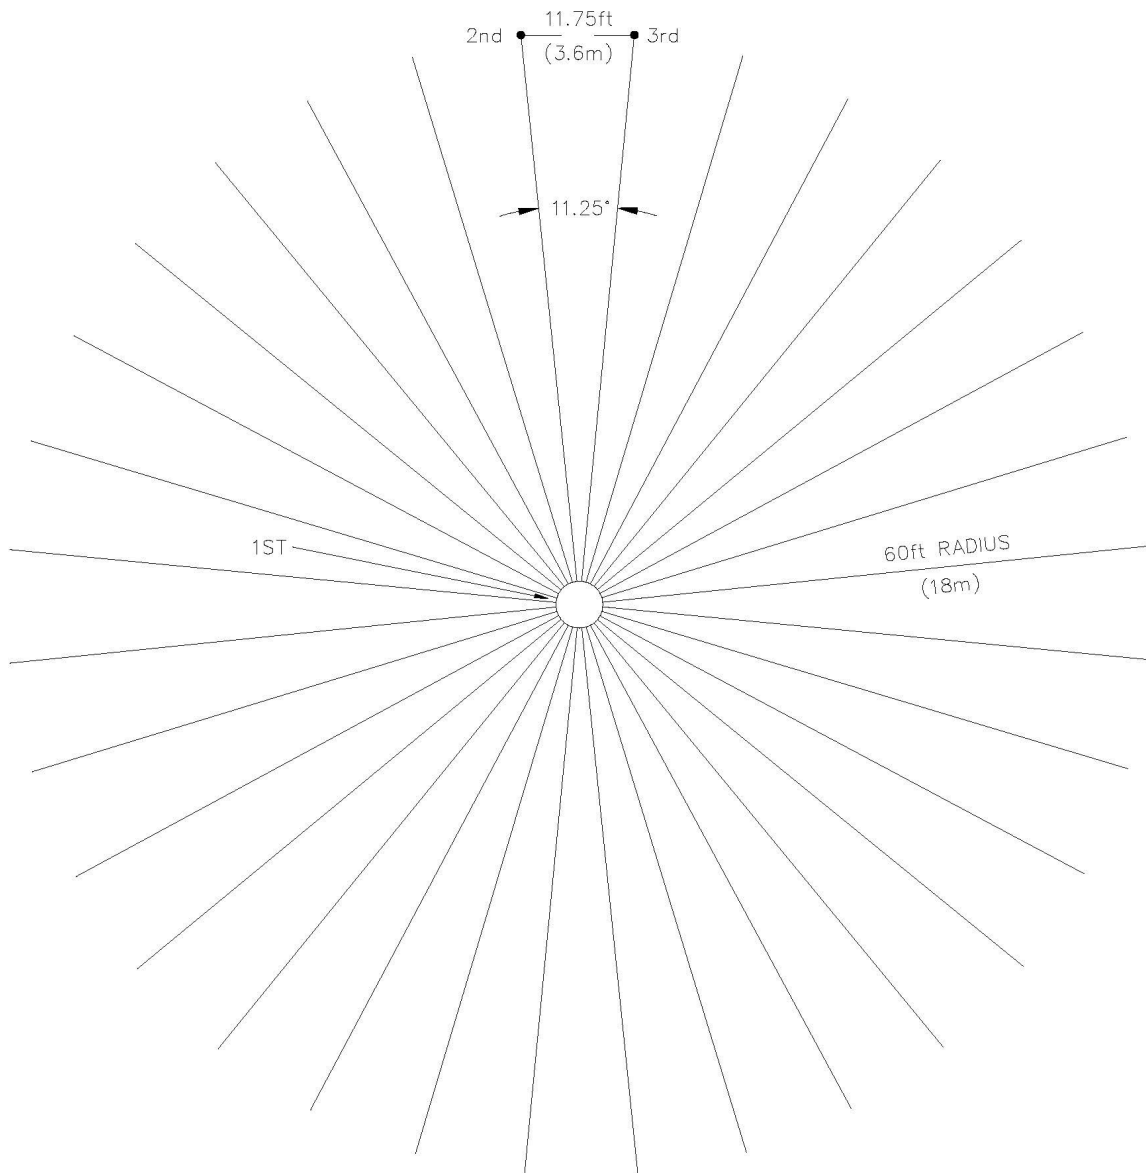

32 Radial Counterpoise Diagram

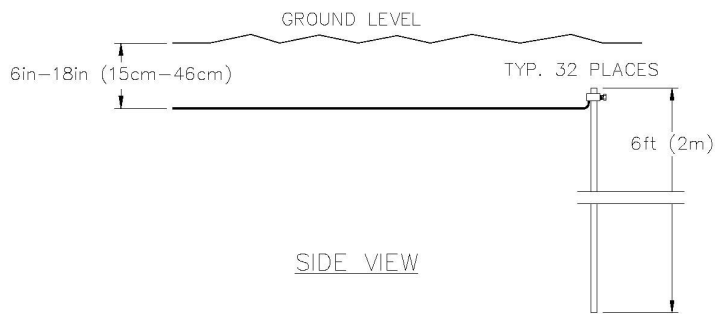

Application:

Sixteen (16) radials are generally adequate for "normal" soil, but in cases of poor ground conductivity, the number of radials can be doubled by using option SLF87720 which will double the number of radials to 32.