



50 Ohm, 250W Test Load

Part Number: SLF10084

SPECIFICATION SHEET

5055 Belmont, Beaumont, TX 77707
 Phone +409.842.1717
 Fax +409.842.2987
 sales@southernavionics.com



FEATURE	SPECIFICATION
Resistance	50 Ohms
Power Rating	250 Watts carrier
Current Rating	2.8 Amps
Frequency of Operation	190-650 kHz
Height	13 in. (33cm)
Length	8 in. (20cm)
Width	8 in. (20cm)
Weight	7 lbs. (3kg)
Connection	Type-N
Compatibility	Up to 250 Watts carrier 1000 Watts PEP
Optional Equipment	7 ft. interface replacement cable

*Information provided is subject to change without notice


Application:

Test Loads are highly recommended for installation and testing to protect your valuable equipment.

Southern Avionics can sell or ship with your NDB, a 50 Ohm non-reactive test load for use during installation, testing, and maintenance.

Test Load is used when:

1. Operating Transmitter in a lab environment.
2. Troubleshooting the secondary Transmitter in the field.

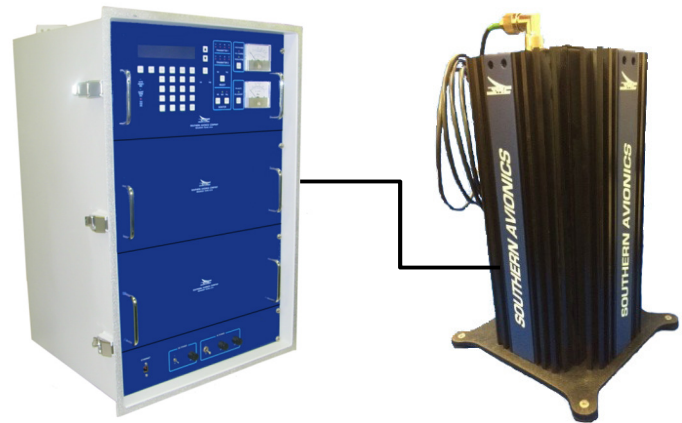

NDB Transmitter

Test Load