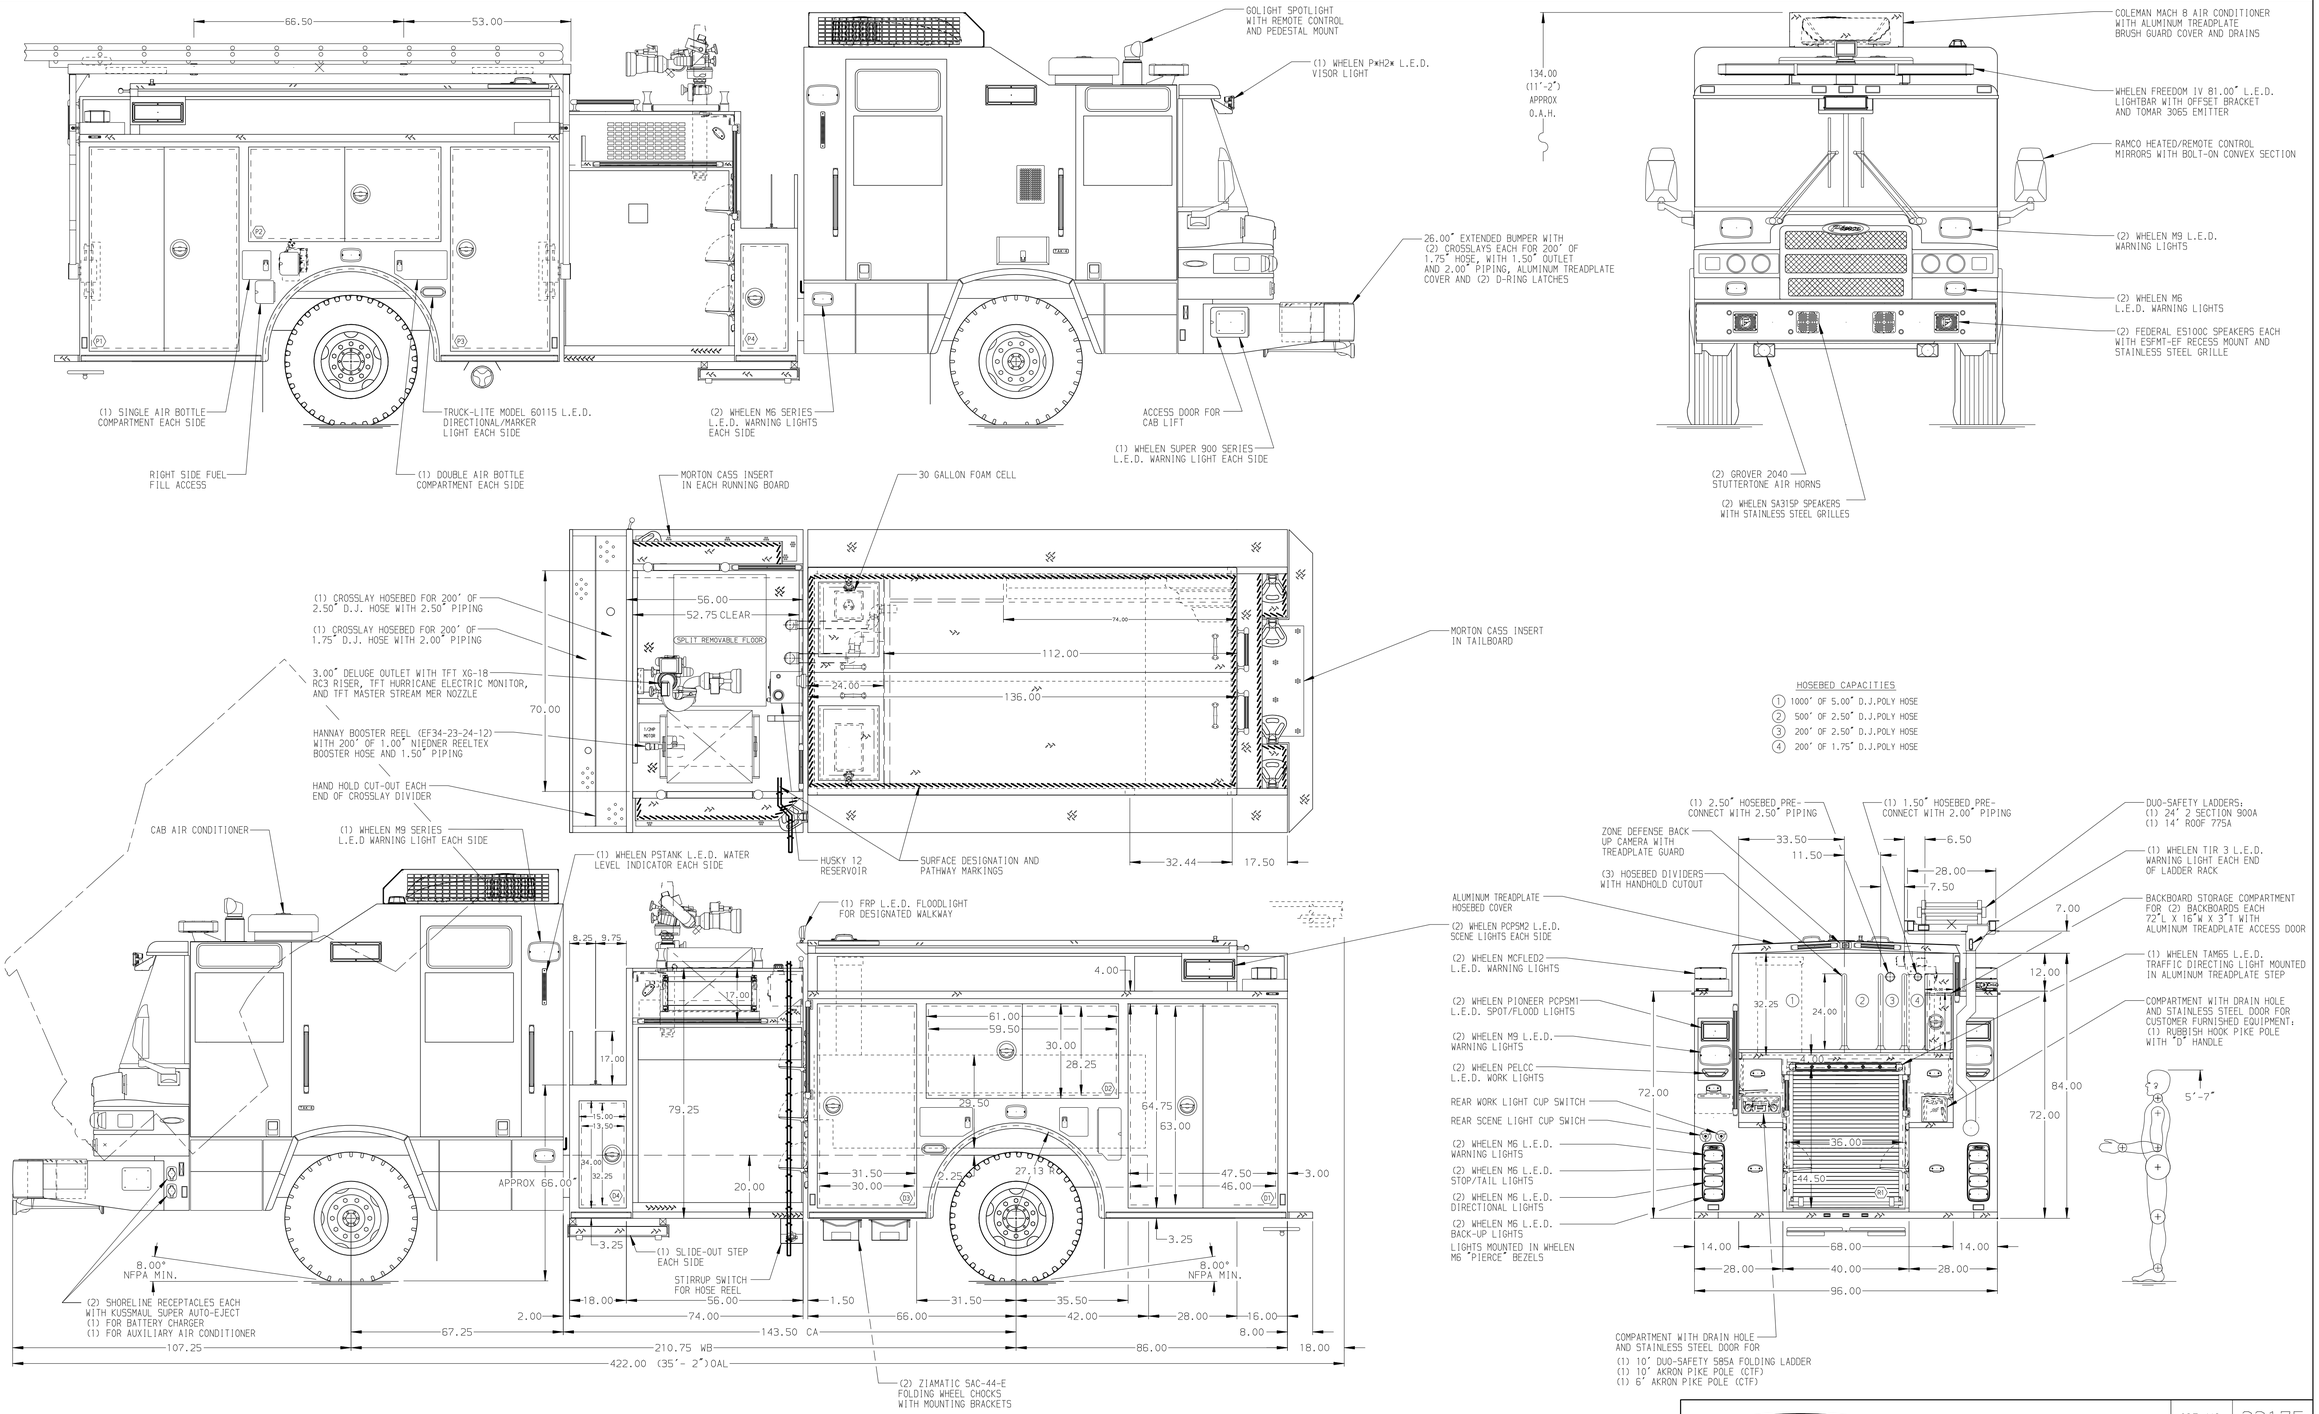

GALVANNEAL

MAXIMUM O.A.L. 422.00"

MAXIMUM O.A.H. 136.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN COMPARTMENT D3
2. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. BOLT-IN PARTITION BETWEEN COMPARTMENTS D1/R1 & P1/R1
4. REVERSE HINGED DOOR ON COMPARTMENT D3
5. NINE ADJUSTABLE SHELVES - THREE IN COMPARTMENT D1, ONE IN D3, ONE IN P1, ONE IN P2, TWO IN P3 AND ONE IN R1
6. ONE ALUMINUM PEGBOARD SWING-OUT TOOLBOARD IN COMPARTMENT P1
7. AIR INLET WITH DISCONNECT COUPLING LOCATED ON DRIVER'S SEAT RISER
8. DUST FILTERS IN ALL COMPARTMENTS
9. ONE ZICO AIR BOTTLE HOLDER IN COMPARTMENT D2
10. ONE ADDITIONAL LOUVER IN COMPARTMENT R1
11. ONE 40" LUMABAR H20 LIGHT STRIP ON BACK OF CAB

REV	DATE	BY	CH
1	10APR18	JRO	LPA
2	15MAR18	LST	LPA
3	02FEB18	JRO	SMA

CHASSIS DATA
MAKE –
MODEL QUANTUM

Pierce MANUFACTURING INC.

TITLE 2000-D-500 WATER/30 FOAM, 152" BODY, SIDE CONTROL CROSSLAYS, DELUGE, FOAM SYSTEM, LADDER RACK

FOR TOWN OF GILBERT GILBERT, ARIZONA

DWG NO. 32175AD

JOB NO.	32175
SCALE 1:24	DATE
DRAWN BY JRO	02FEB18
CHECKED BY SMA	02FEB18
SHEET SIZE D	SHEET NO. _ OF _

View File Created 12-APR-2018 15:05:37