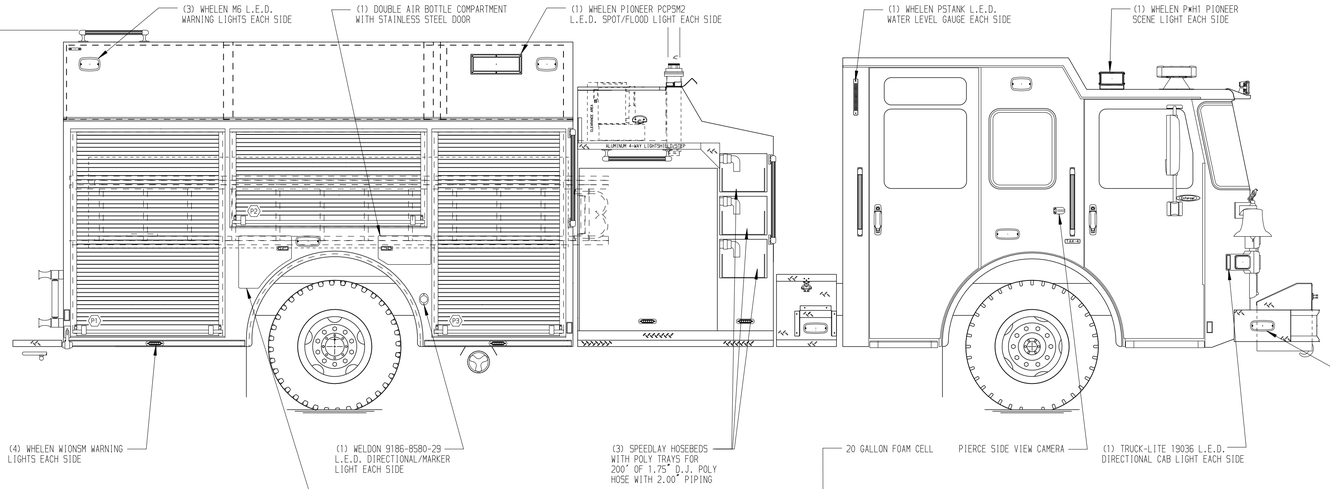

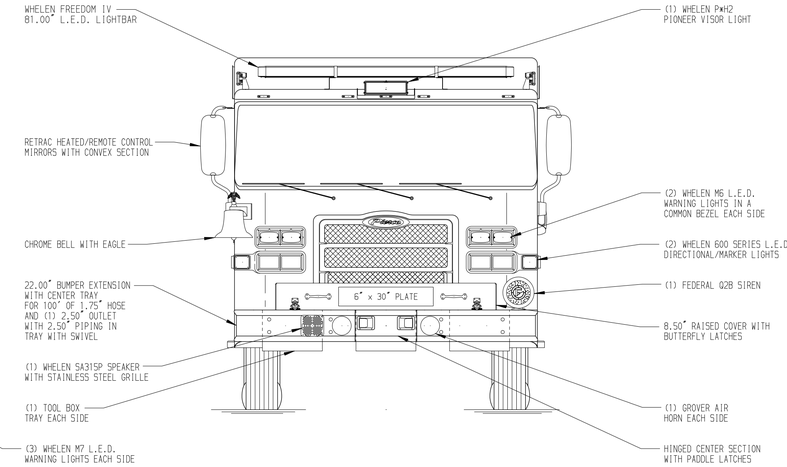

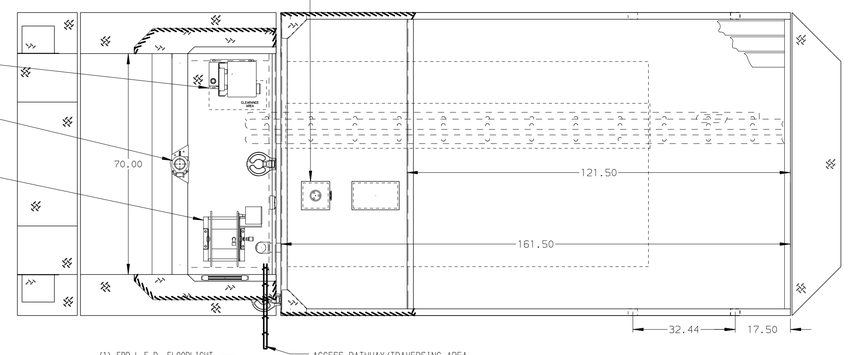

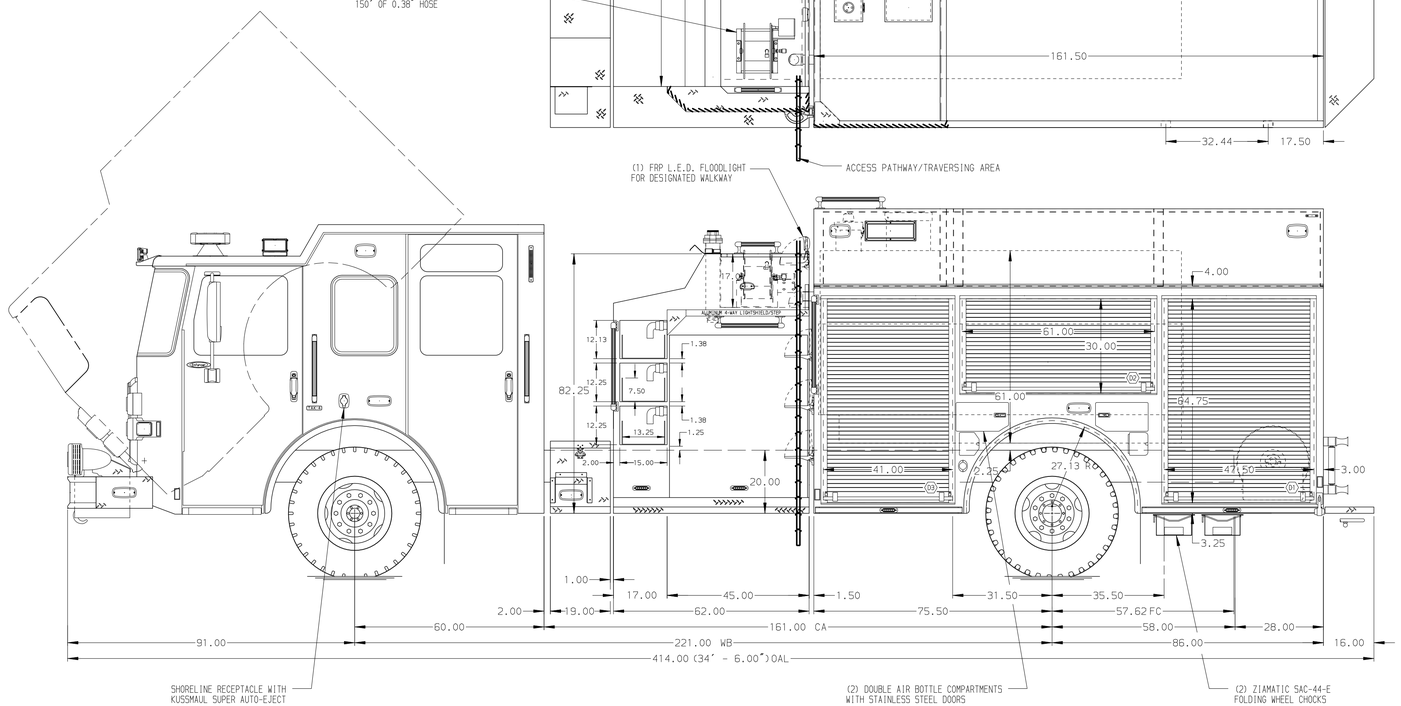

HOSEBED CAPACITIES

1. 250' OF 2.50" D.J. POLY HOSE
2. 1000' OF 5.00" D.J. POLY HOSE
3. 250' OF 2.50" D.J. POLY HOSE

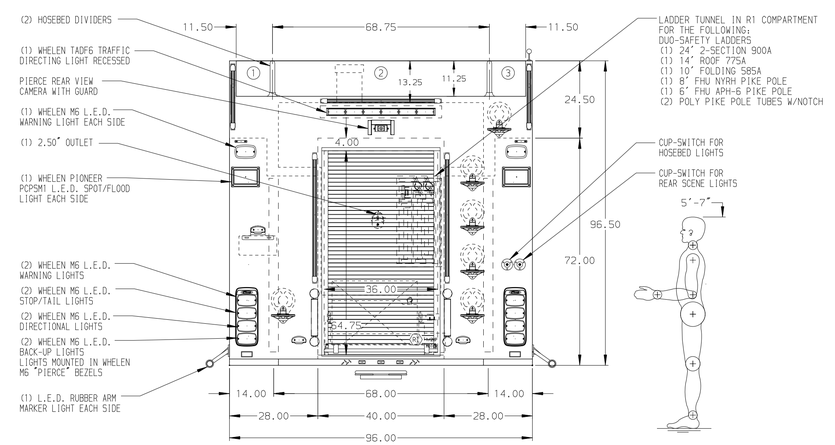

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED ON DRIVER'S SIDE PUMP PANEL
2. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
3. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
4. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
5. ONE ADJUSTABLE FULL WIDTH/DEPTH SHELF IN COMPARTMENT D1, D3, P2, TWO IN P1 & P3
6. ONE ADJUSTABLE SLIDE-OUT TRAY IN COMPARTMENT D3
7. ONE ADJUSTABLE TILT/SLIDE-OUT TRAY IN COMPARTMENT D2
8. CABLE RELEASE LATCH WITH SINGLE HAND OPERATION FOR TRAYS IN COMPARTMENT D2
9. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT D1, P1 & P3
10. SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENT D1
11. ONE VERTICAL PARTITION IN COMPARTMENT P3, TWO IN D2
12. ALUMINUM PEGBOARD WITH TRACKS ON THE REAR WALL OF COMPARTMENT D1
13. ONE HANNAY BOOSTER REEL WITH CAPACITY FOR 200' OF 1.00" HOSE IN COMPARTMENT R1 (MODEL:EF34-23-24)

REV	DATE	BY	CH
V	20APR18	AMI	LAB

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: 1500-D-1000 20G FOAM CELL, 161" BODY W/SPECIAL NOTCH (3)SPEEDLAYS, LADDER TUNNEL, DELUGE, BOOSTER REEL
FOR: GREENVILLE FIRE DEPARTMENT, GREENVILLE, TEXAS
DWG NO. 32244AD

JOB NO.	32244
SCALE	DATE
1:24	
DRAWN BY	08MAR18
AMI	
CHECKED BY	08MAR18
CDU	
SHEET SIZE	SHEET NO.
D	1 OF 1

View File Created 23-APR-2018 08:51:57