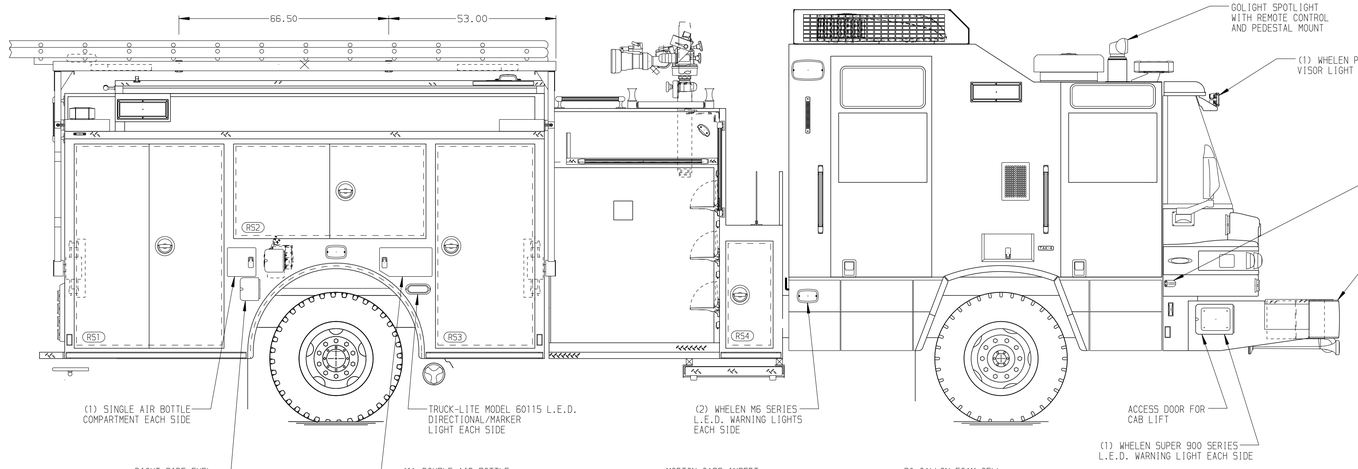

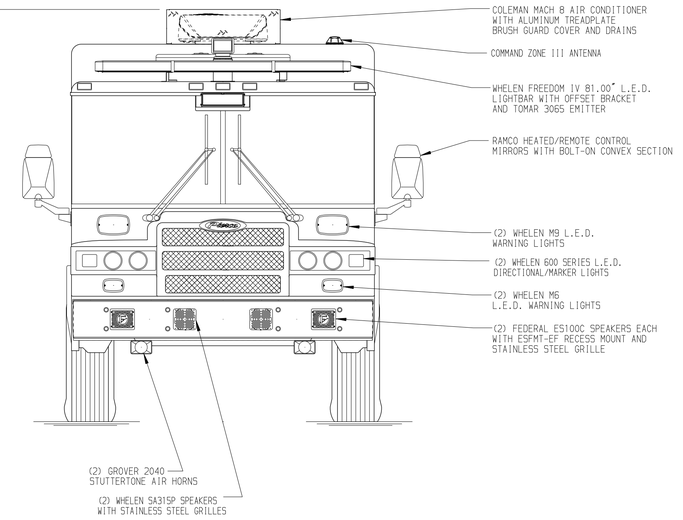

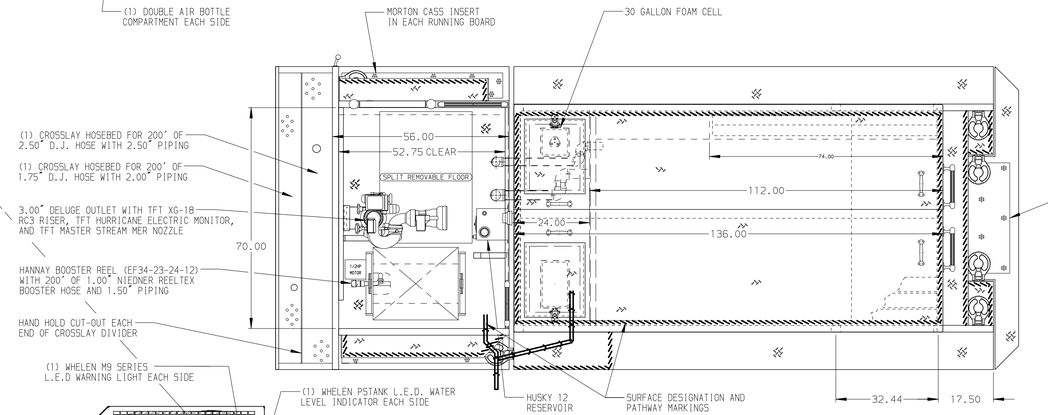

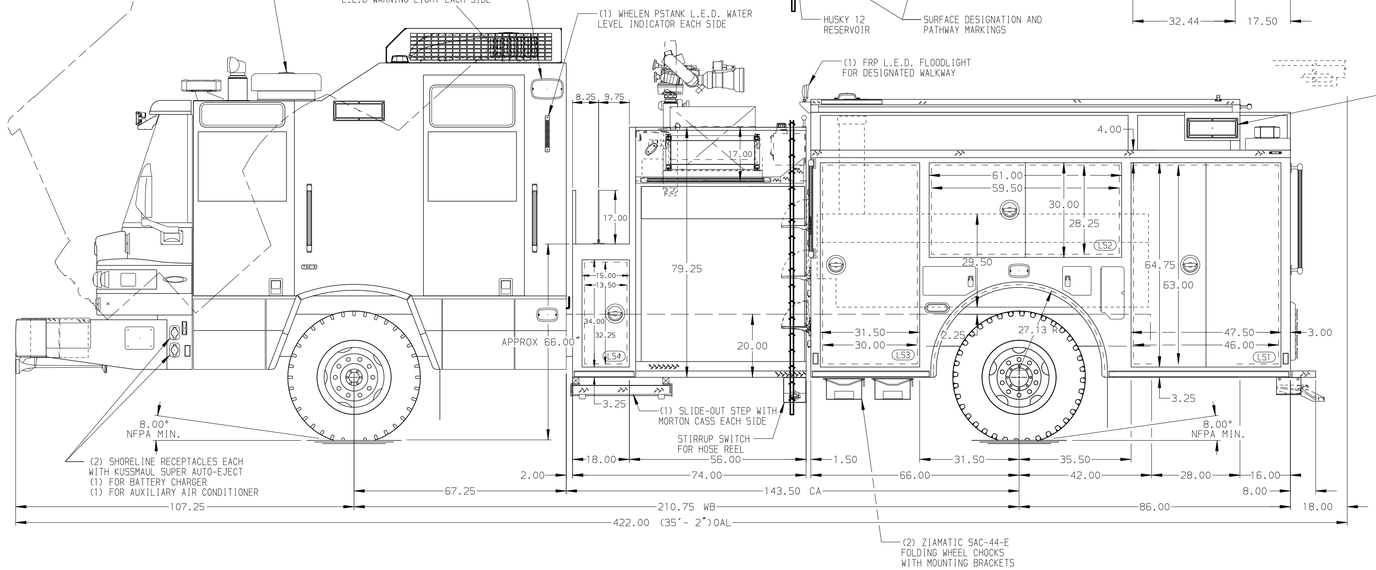

HOSEBED CAPACITIES

1. 1000' OF 5.00" D.J.POLY HOSE
2. 500' OF 2.50" D.J.POLY HOSE
3. 200' OF 2.50" D.J.POLY HOSE
4. 200' OF 1.75" D.J.POLY HOSE

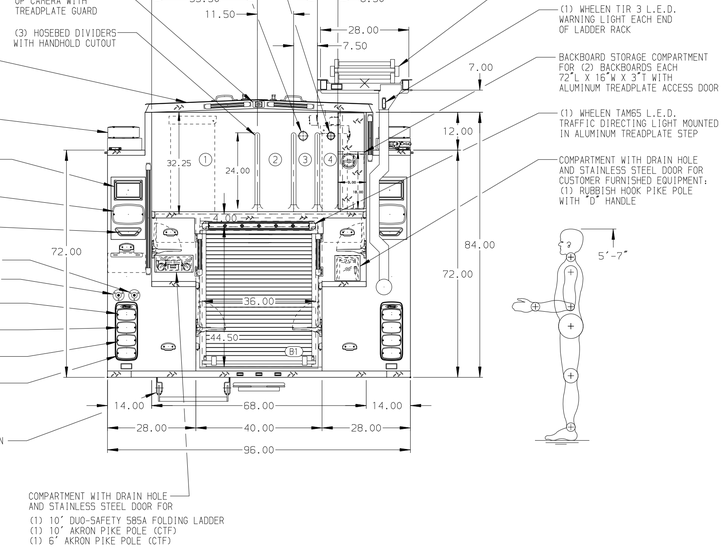

GALVANNEAL | MAXIMUM O.A.L. 422.00" | MAXIMUM O.A.H. 136.00" | SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN COMPARTMENT LS3
2. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. BOLT-IN PARTITION BETWEEN COMPARTMENTS LS1/B1 & RS1/B1
4. REVERSE HINGED DOOR ON COMPARTMENT LS3
5. ONE ADJUSTABLE FULL WIDTH/DEPTH SHELF IN LS3, RS1, RS2 & B1; TWO IN RS3; THREE IN LS1
6. SWING-OUT TOOLBOARD IN COMPARTMENT RS1
7. AIR INLET WITH DISCONNECT COUPLING LOCATED ON DRIVER'S SEAT RISER
8. DUST FILTERS IN ALL COMPARTMENTS
9. ONE ZICO AIR BOTTLE HOLDER IN COMPARTMENT LS2
10. ONE ADDITIONAL LOUVER IN COMPARTMENT B1
11. ONE 40" LUMABAR H20 LIGHT STRIP ON BACK OF CAB
12. KUSSMAUL 12V AIR COMPRESSOR LOCATED IN COMPARTMENT B1
13. BRUSHED S/STL PLATE W/LOGO ON THE RIGHT SIDE OF PUMPHOUSE AREA IPO KNOCKOUTS

REV	DATE	BY	CH
1	07DEC18	LME	JJR
2	09NOV18	LME	JJR

CHASSIS DATA
MAKE –
MODEL
QUANTUM

Pierce MANUFACTURING INC.

JOB NO.	32774
SCALE	1:24
DATE	
TITLE	2000-D-500 WATER/30 FOAM, 152" BODY, SIDE CONTROL CROSSLAYS, DELUGE, FOAM SYSTEM, LADDER RACK
DRAWN BY	LME
DATE	28AUG18
FOR	TOWN OF GILBERT GILBERT, ARIZONA
CHECKED BY	SMA
DATE	29AUG18
DWG NO.	32774AD
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 07-DEC-2018 09:59:35