

Portable Power Units

Copyright © 2008 SRS Crisafulli, Inc. All rights reserved.

	Table of Contents	Page
Section 6	Portable Power Units - 60 models	6 - 1
	Diesel-Hydraulic Power Unit - Trailer mounted - 7 models	6 - 2
	Diesel-Hydraulic Power Unit - Skid mounted - 7 models	6 - 3
	Diesel-PTO Power Unit - Trailer mounted - 7 models	6 - 4
	Diesel-PTO Power Unit - Skid mounted - 7 models	6 - 5
	Electric-Hydraulic Power Unit - Trailer mounted - 8 models	6 - 6
	Electric-Hydraulic Power Unit - Skid mounted - 8 models	6 - 7
	Electric-PTO Power Unit - Trailer mounted - 8 models	6 - 8
	Electric-PTO Power Unit - Skid mounted - 8 models	6 - 9



Diesel-Hydraulic Power Units - Trailer or Skid mounted - 14 models - Horsepower 25 - 250 -Hydraulic output 15 - 150 GPM.



Diesel-PTO Power Units - Trailer or Skid mounted - 14 models - Horsepower 25 - 250 - RPM 540 or 1000




Electric-Hydraulic Power Units - Trailer or Skid mounted - 16 models - Horsepower 25 - 250 -Hydraulic output 15 - 150 GPM.




Electric-PTO Power Units - Trailer or Skid mounted - 16 models - Horsepower 25 - 250 - RPM 540 or 1000









Pumps - Dredges - Power Units - Custom or Standard Manufacturers of reliable Crisafulli products supported by superior service worldwide

SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088 E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net

5

Product Catalogue - Section Six
Portable Power Units

Copyright © 2008 SRS Crisafulli, Inc. All rights reserved.

DIESEL-HYDRAULIC POWER UNITS - Trailer Mounted



Description. SRS Crisafulli diesel hydraulic power units have an industrial duty diesel engine with extended exhaust stack & raincap mounted on an industrial duty trailer, hitch jack, a heavy-duty hydraulic pump, suction screen, fluid reservoir, fluid level gauge, fluid temperature gauge, breather/fill cap, ten micron return-line filter, optional flow control, system pressure gauge, fluid cooler, and all necessary hydraulic fittings. Battery, emergency safety engine shutdown system and fuel tank for 10 hours of continuous operation are included. Performance Range; hydraulic output of 15 - 150 GPM. NOTE: The diesel PTO power unit trailers are not DOT approved for travel on public roads.

* Industrial Duty Diesel Engine	* Safety Shutdown System	
* Extended Exhaust w/Rain Cap	* 10 Hour Fuel Reservoir	
* Heavy Duty Hydraulic Pump	* Heavy Duty Trailer	
* Baffled Fluid Reservoir	* Return Circuit Filtration	
* Adjustable Pressure Relief Valve		

Model/ Part Number	Horsepower (HP)	Hydraulic Output (GPM)	Maximum Hydraulic Pressure (PSI)	Weight Estimated - Lbs
PUDH25T	25	15	2,000	2,400
PUDH50T	50	30	2,000	2,600
PUDH75T	75	45	2,000	3,200
PUDH110T	110	75	2,000	3,600
PUDH150T	150	90	2,000	4,500
PUDH200T	200	120	2,000	6,000
PUDH250T	250	150	2,000	6,500

(Larger hydraulic flow rates & pressures are available; consult Factory for details.)			
Standard Options & Accessories			
On/Off & Reversing Control Valve Multiple Circuits w/ Flow Control			
DOT Light Package	8 GPM Auxiliary Hydraulic Circuit		
Electric Brakes (per axle) Hydraulic Hose & Quick Coupler Fitting			
Picker crane with Electric Winch	High Pressure High Efficiency Piston Pumps		
Pump Basket Optional Hitch Configurations			
Roll Over Protection System (ROPS) Sound Attenuated or Weather Enclosur			
Hose Rack or Reel			
*Power Unit will meet or exceed stated HP for continuous operation at rated RPM.			

Pumps - Dredges - Power Units - Custom or Standard Manufacturers of reliable Crisafulli products supported by superior service worldwide


SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088 E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net



Product Catalogue - Section Six
Portable Power Units

Copyright © 2008 SRS Crisafulli, Inc. All rights reserved.

DIESEL-HYDRAULIC POWER UNITS - Skid Mounted



Description. SRS Crisafulli diesel - hydraulic power units have an industrial duty diesel engine with extended exhaust stack & raincap mounted on an industrial duty skid, a heavy-duty hydraulic pump, suction screen, fluid reservoir, fluid level gauge, fluid temperature gauge, breather/fill cap, ten micron return-line filter, optional flow control, system pressure gauge, fluid cooler, and all necessary hydraulic fittings. Battery, emergency safety engine shutdown system and fuel tank for 10 hours of continuous operation are included. **Performance Range; hydraulic output of 15 - 150 GPM.**

* Industrial Duty Diesel Engine	* Safety Shutdown System	
* Extended Exhaust w/Rain Cap	* 10 Hour Fuel Reservoir	
* Heavy Duty Hydraulic Pump	* Heavy Duty Skid w/Lifting Eyes	
* Baffled Fluid Reservoir	* Return Circuit Filtration	
* Adjustable Pressure Relief Valve		

Model/ Part Number	Horsepower (HP)	Hydraulic Output (GPM)	Maximum Hydraulic Pressure (PSI)	Weight Estimated (Lbs)
PUDH25	25	15	2,000	2,600
PUDH50S	50	30	2,000	2,800
PUDH75S	75	45	2,000	3,400
PUDH110S	110	75	2,000	3,800
PUDH150S	150	90	2,000	4,700
PUDH200S	200	120	2,000	6,200
PUDH250S	250	150	2,000	6,700

(Larger hydraulic flow rates & pressures are available; consult Factory for details.)			
Standard Options & Accessories			
On/Off & Reversing Control Valve Multiple Circuits w/ Flow Control			
Sound Attenuated or Weather Enclosures 8 GPM Auxiliary Hydraulic Circuit			
Hose Rack or Reel Hydraulic Hose & Quick Coupler			
Picker crane with Electric Winch Pump Basket			
High Pressure High Efficiency Piston Pumps			
*Power Unit will meet or exceed stated HP for continuous operation at rated RPM.			

Pumps - Dredges - Power Units - Custom or Standard Manufacturers of reliable Crisafulli products supported by superior service worldwide

SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088


E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net



Product Catalogue - Section Six Portable Power Units

Copyright © 2008 SRS Crisafulli, Inc. All rights reserved.

DIESEL- PTO POWER UNITS - Trailer Mounted

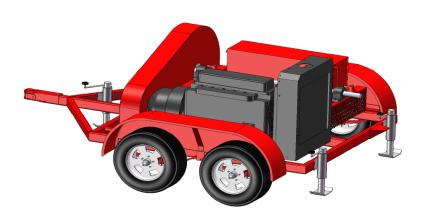

Description. SRS Crisafulli Diesel PTO Power Units have industrial duty diesel engines with extended exhaust stacks & raincaps mounted on industrial duty skids or trailers, speed reduction, (540 RPM resultant speed if not specified otherwise), safety guards, ball hitch, hitch jack, power shaft and auxiliary pump hitch plate. Battery, emergency safety engine shutdown system and fuel tank for 10 hours of continuous operation are included. The diesel PTO power units are designed for use with any standard Crisafulli™ PTO powered trailer pump. Performance Range; Horsepower of 25 - 250 HP. NOTE: The diesel PTO power unit trailers are not DOT approved for travel on public roads.

* Industrial Duty Diesel Engine	* Heavy Duty Trailer	
* Extended Exhaust w/Rain Cap	* Speed Reduction w/Safety Guard	
* Safety Shutdown System	* PTO Output	
* 10 Hour Fuel Reservoir	* Stabilizer Jacks Included	

Model/ Part Number	Horsepower (HP)	PTO SPEED (RPM)	Weight Estimated (Lbs)
PUDP25T	25	540/1000	1,400
PUDP50T	50	540/1000	1,600
PUDP75T	75	540/1000	2,000
PUDP110T	110	540/1000	2,500
PUDP150T	150	540/1000	3,400
PUDP200T	200	540/1000	5,000
PUDP250T	250	540/1000	5,200

Standard Options & Accessories			
Electric Brakes (per axle) Sound Attenuated or Weather Enclosures			
Optional Hitch Configurations DOT Light Package			
8 GPM Auxiliary Hydraulic Circuit Roll-over Protection System (ROPS)			
*Power Unit will meet or exceed stated HP for continuous operation at rated RPM.			

Pumps - Dredges - Power Units - Custom or Standard Manufacturers of reliable Crisafulli products supported by superior service worldwide

SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088


E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net



Product Catalogue - Section Six Portable Power Units

Copyright © 2008 SRS Crisafulli, Inc. All rights reserved.

DIESEL- PTO POWER UNITS - Skid Mounted

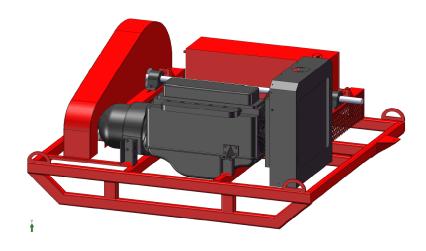

Description. SRS Crisafulli Diesel PTO Power Units have industrial duty diesel engines with extended exhaust stacks & raincaps mounted on industrial duty skids, speed reduction, (540 RPM resultant speed if not specified otherwise), safety guards, power shaft and auxiliary pump hitch plate. Battery, emergency safety engine shutdown system and fuel tank for 10 hours of continuous operation are included. The diesel PTO power units are designed for use with any standard Crisafulli™ PTO powered trailer pump. Performance Range; Horsepower of 25 - 250 HP.

* Industrial Duty Diesel Engine	* Heavy Duty Skid w/ Lifting Eyes
* Extended Exhaust w/Rain Cap	* Speed Reduction w/Safety Guard
* Safety Shutdown System	* PTO Output
* 10 Hour Fuel Reservoir	

Model/ Part Number	Horsepower (HP)	PTO SPEED (RPM)	Weight Estimated (Lbs)
PUDP25S	25	540/1000	1,600
PUDP50S	50	540/1000	1,800
PUDP75S	75	540/1000	2,200
PUDP110S	110	540/1000	2,700
PUDP150S	150	540/1000	3,600
PUDP200S	200	540/1000	5,200
PUDP250S	250	540/1000	5,400

Standard Options & Accessories			
8 GPM Auxiliary Hydraulic Circuit Sound Attenuated or Weather Enclosures			
*Power Unit will meet or exceed stated HP for continuous operation at rated RPM.			

Pumps - Dredges - Power Units - Custom or Standard Manufacturers of reliable Crisafulli products supported by superior service worldwide

SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088 E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net

5

Product Catalogue - Section Six
Portable Power Units

Copyright © 2008 SRS Crisafulli, Inc. All rights reserved.

ELECTRIC-HYDRAULIC POWER UNITS - Trailer Mounted



Description. SRS Crisafulli electric - hydraulic power units have totally enclosed, fan cooled electric motor mounted on industrial duty trailers, with a heavy-duty hydraulic pump, hitch jack, suction screen, fluid reservior, fluid level gauge, fluid system pressure gauge, temperature gauge, breather/fill cap, ten micron return line filter, flow control valve, pressure relief valve (set at 2000 PSI), fluid cooler, cooling fans. **Performance Range: hydraulic** output 15 - 150 GPM. NOTE: The **Electric- Hydraulic power units** are not DOT approved for travel on public roads.

* Totally Enclosed Electric Motor (TEFC)	* Return Circuit Filtration
* Heavy Duty Hydraulic Pump	* Baffled Fluid Reservoir
* Adjustable Pressure Relief Valve	* Heavy Duty Trailer

Model/ Part Number	Horsepower (HP)	Maximim Hydraulic Output (GPM)	Maximim Hydraulic Pressure (PSI)	Weight - Lbs Estimated
PUEH25T	25	15	2000	1,700
PUEH50T	50	30	2000	2,100
PUEH75T	75	45	2000	2,700
PUEH100T	100	60	2000	3,300
PUEH125T	125	75	2000	4,000
PUEH150T	150	90	2000	5,000
PUEH200T	200	120	2000	6,000
PUEH250T	250	150	2000	6,400

(Larger hydraulic flow rates & pressures are available; consult Factory for details.)			
Standard Options & Accessories			
ON/Off Reversing Control Valve Multiple Circuits w/ Flow Control			
Electric Brakes (per axle) Full Enclosures			
Picker Crane with Electric Winch DOT Light Package			
Explosion-proof Motor Optional Hitch Configurations			
Hydraulic Hose & Quick Coupler Fittings Starter Panel			
Roll Over Protection System (ROPS) High Pressure High Efficiency Piston Pump			
Pump Basket Hose Rack or Reel			

Pumps - Dredges - Power Units - Custom or Standard Manufacturers of reliable Crisafulli products supported by superior service worldwide


SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088 E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net



Portable Power Units

Copyright © 2008 SRS Crisafulli, Inc. All rights reserved.

ELECTRIC-HYDRAULIC POWER UNITS - Skid Mounted

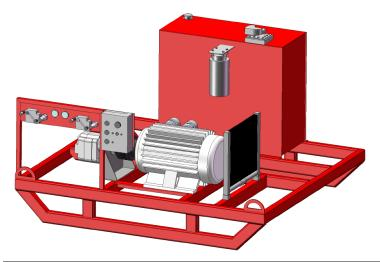

Description. SRS Crisafulli electric - hydraulic power units have totally enclosed, fan cooled electric motor mounted on industrial duty skids, with a heavy-duty hydraulic pump, suction screen, fluid reservior, fluid level gauge, fluid system pressure gauge, temperature gauge, breather/ fill cap, ten micron return line filter, flow control valve, pressure relief valve (set at 2000 PSI), fluid cooler, cooling fans. Performance Range: hydraulic output 15 - 150 GΡM.

* Totally Enclosed Electric Motor (TEFC)	* Return Circuit Filtration
* Adjustable Pressure Relief Valve	* Heavy Duty Hydraulic Pump
* Heavy Duty Skid w/Lifting Eyes	* Baffled Fluid Reservoir

Model/ Part Number	Horsepower (HP)	Maximim Hydraulic Output (GPM)	Maximim Hydraulic Pressure (PSI)	Weight - Lbs Estimated
PUEH25S	25	15	2000	1,800
PUEH50S	50	30	2000	2,200
PUEH75S	75	45	2000	2,900
PUEH100S	100	60	2000	3,500
PUEH125S	125	75	2000	4,200
PUEH150S	150	90	2000	5,200
PUEH200S	200	120	2000	6,200
PUEH250S	250	150	2000	6,600

(Larger hydraulic flow rates & pressures are available; consult Factory for details.)			
Standard Options & Accessories			
ON/Off Reversing Control Valve Multiple Circuits w/ Flow Control			
Picker Crane with Electric Winch Full Enclosures			
Hydraulic Hose & Quick Coupler Fittings Starter Panel			
Explosion-proof Motor High Pressure High Efficiency Piston Pump			
Pump Basket Hose Rack or Reel			

Pumps - Dredges - Power Units - Custom or Standard Manufacturers of reliable Crisafulli products supported by superior service worldwide

SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088 E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net



Portable Power Units

Copyright © 2008 SRS Crisafulli, Inc. All rights reserved.

ELECTRIC - PTO POWER UNITS - Trailer Mounted



Description. SRS Crisafulli Electric-PTO Power units have industrial duty TEFC (totally enclosed, fan cooled) electric motors mounted on heavy duty trailers, equipped with belt and sheave speed reduction (540 RPM resultant speed unless otherwise specified), sheave guard, hitch jack, dual rear stabilizers, ball hitch, intermediate power shaft, and auxiliary pump hitch plate. Performance Range: Horsepower 25 - 250. NOTE: The Electric- Hydraulic power units are not DOT approved for travel on public roads.

* Totally Enclosed Electric Motor (TEFC)	* Heavy Duty Trailer	
* Stabilizer	* PTO Output	
* Speed Reduction w/Safety Guard	* Stabilizer Jacks Included	

Model/Part Number	Horsepower (HP)	PTO SPEED (RPM)	Weight - Lbs Estimated
PUEP25T	25	540/1000	1,400
PUEP50T	50	540/1000	1,600
PUEP75T	75	540/1000	2,100
PUEP100T	100	540/1000	2,700
PUEP125T	125	540/1000	3.300
PUEP150T	150	540/1000	3,600
PUEP200T	200	540/1000	4,100
PUEP250T	250	540/1000	4,600

Standard Options		
Electric Brakes (per axle) Full Enclosures		
Optional Hitch Configurations	DOT Light Package	
Explosion-proof motors	Roll-over Protection System (ROPS)	
Starter Panel		

Pumps - Dredges - Power Units - Custom or Standard Manufacturers of reliable Crisafulli products supported by superior service worldwide

SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088


E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net



Portable Power Units

Copyright © 2008 SRS Crisafulli, Inc. All rights reserved.

ELECTRIC - PTO POWER UNITS - Skid Mounted

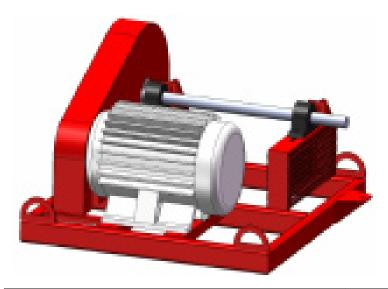

Description. SRS Crisafulli Electric-PTO Power units have industrial duty TEFC (totally enclosed, fan cooled) electric motors mounted on heavy duty skids, equipped with belt and sheave speed reduction (540 RPM resultant speed unless otherwise specified), sheave guard, hitch jack, dual rear stabilizers, ball hitch, intermediate power shaft, and auxiliary pump hitch plate. Performance Range: Horsepower 25 - 250.

* Totally Enclosed Electric Motor (TEFC)	* Heavy Duty Skid w/ Lifting Eyes
* Speed Reduction w/Safety Guard	* PTO Output

Model/Part Number	Horsepower (HP)	PTO SPEED (RPM)	Weight Estimated (Lbs)
PUEP25S	25	540/1000	1,500
PUEP50S	50	540/1000	1,700
PUEP75S	75	540/1000	2,300
PUEP100S	100	540/1000	2,900
PUEP125S	125	540/1000	3.500
PUEP150S	150	540/1000	3,800
PUEP200S	200	540/1000	4,300
PUEP250S	250	540/1000	4,800

Standard Options	
Explosion-proof motors	Full Enclosures
Starter Panel	

Pumps - Dredges - Power Units - Custom or Standard Manufacturers of reliable Crisafulli products supported by superior service worldwide

SRS Crisafulli, Inc. - 1610 Crisafulli Drive - P.O. Box 1051 - Glendive, MT 59330 - USA Phone: 406-365-3393 - Toll free: 800-442-7867 - Fax: 406-365-8088 E-mail: srsc@crisafulli.com - www.crisafulli.com www.dredge.net