Setup Instructions for Winegard CarryOut GM1518 Satellite Antenna†† & DISH Receiver

Setup | Installation | Receiver Activation Software Version L551RGND-N

TABLE OF CONTENTS

First-Time Setup Subsequent Setup

Page 2 Page 4

First-Time Setup of Winegard CarryOut GM1518 Satellite Antenna^{††} & DISH Receiver

Setup | Installation | Receiver Activation

Software Version L551RGND-N

Instructions Estimated Setup Time

STEP #1

Position the Winegard CarryOut satellite antenna and connect the cabling between the satellite antenna and receiver. **IMPORTANT:** Ensure that your satellite antenna is connected to a power source, if applicable.

STEP #2

Power up TV / ViP®211k Receiver / Winegard CarryOut satellite antenna.

STEP #3

<u>Installation Wizard: Program TV Remote to Receiver</u> – Follow the on-screen instructions by pressing 'RECORD' on your DISH remote and then selecting 'Continue'



STEP #4 25 MINUTES

Installation Wizard: Download Software





STEP #5

Installation Wizard: Set Video Resolution – Select your desired resolution and then select 'Test' and 'Save'





STEP #6 3 MINUTES

Installation Wizard: Connect Receiver to Ethernet or Phone - Select 'Continue'



NOTE: Connecting Ethernet or Phone is not required; it will automatically sequence through if you choose not to connect.

STEP #7 10 MINUTES

Installation Wizard: Activate Receiver



First-Time Activation of DISH ViP®211k Receiver

To activate, call the applicable number listed below.

New DISH Customers: 1.800.970.9623Existing DISH Customers: 1.888.854.9535

Subsequent Setup of Winegard CarryOut GM1518 Satellite Antenna^{††} & DISH Receiver

Setup | Installation | Receiver Activation

Software Version L551RGND-N

Instructions Estimated Setup Time

STEP #1


Position the Winegard CarryOut satellite antenna and connect the cabling between the satellite antenna and receiver. **IMPORTANT:** Ensure that your satellite antenna is connected to a power source, if applicable.

STEP #2

Power up TV / ViP®211k Receiver / Winegard CarryOut satellite antenna.

STEP #3

Select 'Menu' from your remote. From the Main Menu page, select '611' on your remote control number pad.

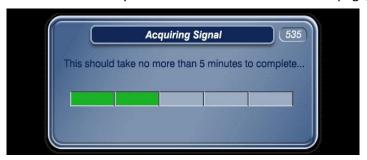


STEP #4


Select 'Check Switch' with your DISH remote.



STEP #5 20 MINUTES

Select 'Test' with your DISH remote.

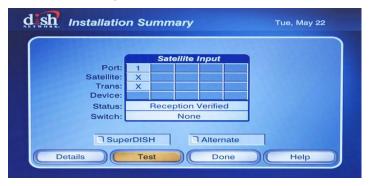

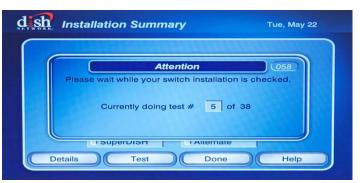

STEP #6 3 MINUTES

Select 'Done' using your DISH remote.

If using TR6100, you should see all three satellites at this step (110, 119, 129).





NOTE: If you see an X in the place of the satellite information (110, 119, 129) at this step, reposition your satellite antenna and then select 'Test.'


STEP #7

Select 'Done' on your DISH remote, and then 'Cancel.' Do this three (3) times.



STEP #8 5 MINUTES

535 Popup: Acquiring Signal

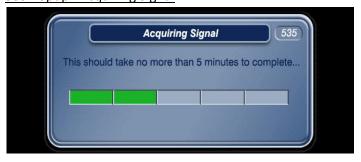

STEP #9 10 MINUTES

330 Popup: Downloading Program Guide



STEP #10 10 MINUTES

Installation Wizard: Activate Receiver



First-Time Activation of DISH ViP®211k Receiver

To activate, call the applicable number listed below.

New DISH Customers: 1.800.970.9623Existing DISH Customers: 1.888.854.9535