## HEADROOM REQUIRED

| OPENING HEIGHT | VERTICAL HEADROOM | HORIZONTAL HEADROOM |
|---|---|---|
| THRU 8'-0" | 18" | 17 1/2" |
| OVER 8'-0" THRU 10'-0" | 18 1/2" | 17 3/4" |
| OVER 10'-0" THRU 12'-0" | 18 3/4" | 18" |
| OVER 12'-0" THRU 14'-0" | 19" | 18 1/2" |

NOTES:

1. OPERATION TYPE MAY BE PUSH-UP OR RIGHT HAND INTERNAL ELECTRIC.
2. FOR CRITICAL FITS DUE TO REDUCED AVAILABLE HEADROOM OR SIDEROOM CLEARANCES, CONSULT FACTORY.
3. CLEARANCES SHOWN ARE MAXIMUMS. LESSER CLEARANCES MAY BE POSSIBLE.
4. UNLESS OTHERWISE NOTED, LOCKING SHALL BE BY SINGLE MINI SLIDE LATCH BOLTED TO CURTAIN AND SUITABLE FOR DOUBLE PADLOCKS AND SINGLE CYLINDER LOCK BY OTHERS.
5. ALL OPENING PREPARATION, ELECTRICAL POWER AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS.
6. SERIES 1100I IS AN INSULATE SERIES 1100.
7. CURTAIN FINISH SHALL BE SILICONE POLYESTER PRE-PAINT OVER GALVANIZED GRADE 80 STEEL.
8. GUIDES, BRACKETS, BOTTOM BAR ANGLE AND HEAD STOPS ARE ZINC COATED.
9. MAXIMUM OPENING SIZE: 10'-0" X 14'-0".
10. STEEL WINDLOCKS WILL BE PROVIDED ON DOOR ASSEMBLIES FOR OPENINGS GREATER THAN 6'-0" TO 10'-0" WIDE.
11. JANUS MODEL 1100 IS A STATE OF FLORIDA APPROVED WINDLOAD PRODUCT. PRODUCT EVALUATIONS AND STAMPED DRAWINGS ARE ACCESSIBLE VIA. www.floridabuilding.org. FL#12765.1 & 12765.2
12. JANUS MODEL 1100 IS EVALUATED FOR COMPLIANCE THROUGH TEXAS DEPARTMENT OF INSURANCE (TDI). PRODUCT EVALUATIONS AND STAMPED DRAWINGS ARE ACCESSIBLE VIA. www.tdi.texas.gov, TDI# GDR-70.




END VIEW




INSIDE ELEVATION

(*) FOR PUSH-UP OPERATION.....4"
FOR HAND CHAIN OPERATION.....4"
FOR ELECTRIC OPERATION.....4"
FOR OUTSIDE OF CHAIN DRIVE.....6"
NOTE: RIGHT SIDE DRIVE SHOWN

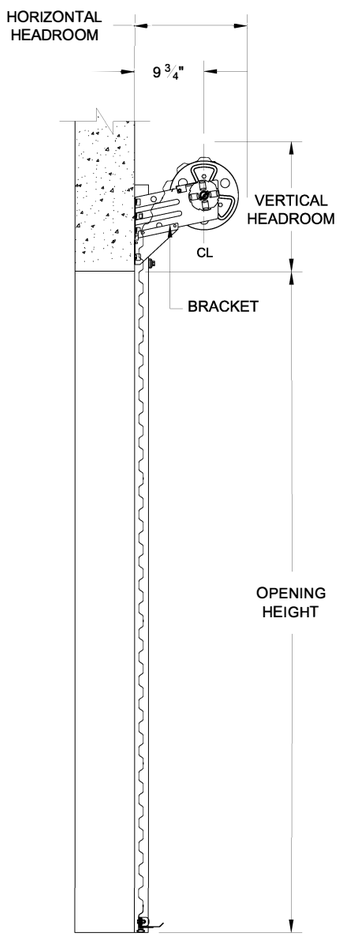


26 GA CURTAIN PANEL DETAIL

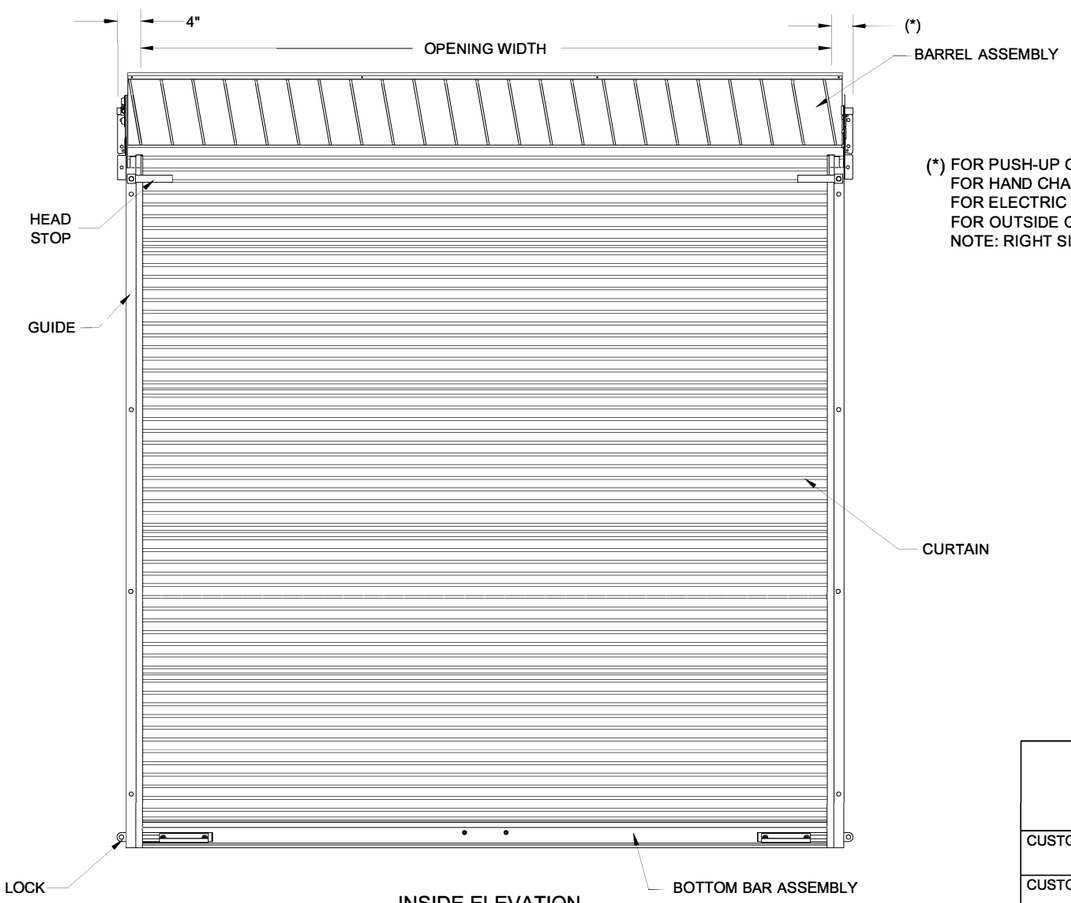


DETAIL A




BOTTOM BAR ASSEMBLY

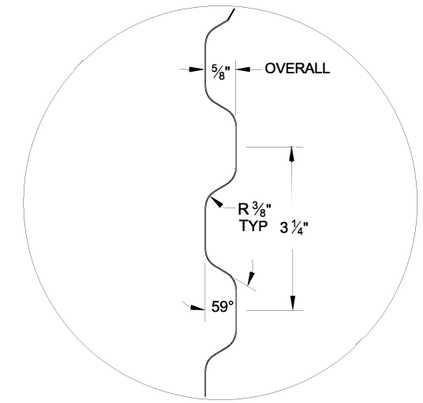


CONCRETE/FILLED BLOCK JAMBS USING 5/16" X 2 1/4" TAPCON XL

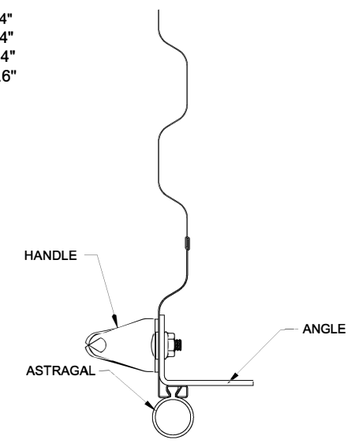


STEEL JAMBS USING #12-14 X 1" TEKS PANCAKE HEAD

16 GA GUIDE MOUNTING DETAIL

D.V. 08/13/2013

| FACTORY ORDER NUMBER | DOOR SERIES | | QTY | OPENING SIZE | | JAMB TYPE | | | OUTSIDE CURTAIN COLOR | OPERATION | | | OPERATION HAND | WEATHERSTRIP | | | ADDED OPTIONS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 1100 | 1100I | | WIDTH | HEIGHT | STEEL | CONC./ MAS | WOOD | | PUSH UP | REDUCED CHAIN | ELECTRIC | | TOP | HEADER | SIDE | |
| | ☐ | ☐ | | | | ☐ | ☐ | ☐ | | ☐ | ☐ | ☐ | | ☐ | ☐ | ☐ | |
| | ☐ | ☐ | | | | ☐ | ☐ | ☐ | | ☐ | ☐ | ☐ | | ☐ | ☐ | ☐ | |
| | ☐ | ☐ | | | | ☐ | ☐ | ☐ | | ☐ | ☐ | ☐ | | ☐ | ☐ | ☐ | |

# COMMERCIAL DOOR SERIES: 1100/11001

| | | | |
|---|---|---|---|
| CUSTOMER NUMBER: | | | DATE: |
| CUSTOMER NAME: | | | CONTACT: |
| PROJECT NAME: | | | |
| PROJECT LOCATION: | | | |
| PLANT: | | | SALESPERSON: |
| DRAWN BY: | DATE: | | JANUS INTERNATIONAL CORPORATION<br>135 JANUS INTERNATIONAL BLVD.<br>TEMPLE, GA 30179-4435<br>770-562-2850 FAX: 770-562-2264 |
| DRAWING NUMBER: | SHT: | OF: | |