

Drive 4G-X Fleet

SKU: 470221 MAP: \$499.99

FEATURES

- Boosts 4G/LTE & 3G for multiple cellular devices, simultaneously, in a fleet vehicle (Police, Work, Service and Delivery vehicles)
- Boosts signal strength for cellular-based fleet tracking devices allowing fleet managers to better track vehicles, even in weak signal areas
- Works with ALL cellular devices in the vehicle on ALL carriers simultaneously
- Increases cellular range, provides fastest available data speeds and improves call quality
- **REQUIRES PROFESSIONAL INSTALLATION**

⚠️ WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



LTE FASTEST NETWORK SPEEDS

4G FAST NETWORK SPEEDS

UP TO +50 dB GAIN

MULTI-USER WIRELESS BOOSTER

REQUIRES PROFESSIONAL INSTALLATION

Kit Includes



Drive 4G-X



4G NMO Antenna (314405)



4G Slim Low-Profile Antenna (314401)



12V Hardwire Power Supply (851111)



3/4 inch NMO Mount w/ 14 ft. cable (901150)

6 ft. RG58 extension cable

Hole drilling protective tape

O-ring sealant

About

The **Drive 4G-X Fleet** is a powerful cellular signal booster, specifically designed for fleet vehicles like: police cars, government or commercial vehicles, delivery trucks or whatever your fleet might look like. It boosts all carriers simultaneously giving your staff the signal strength they need to communicate and stay connected with others on your team no matter their cellular provider.

This kit uses a high performance NMO antenna, which **REQUIRES PROFESSIONAL INSTALLATION**. The Drive 4G-X Fleet boosts voice and data with max FCC-allowed 50 dB system gain, enhancing 4G LTE and 3G network signals up to 32x.


Compatible with all U.S. wireless carriers including Verizon, AT&T, Sprint, T-Mobile, US Cellular, Straight Talk and more.

Like all weBoost products, the Drive 4G-X Fleet comes with a 2-year warranty and 30-day money back guarantee.

Specifications

MODEL NUMBER	470221†	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
FREQUENCIES	Band 2	1900 MHz
MAX GAIN	50 dB	
IMPEDANCE	50 Ohm	
POWER	6V / 2.5A	
CONNECTORS	SMA Female	
BOOSTER DIMENSIONS	6.25 x 4.5 x 1 in	
BOOSTER WEIGHT	.77 lbs	

Installation

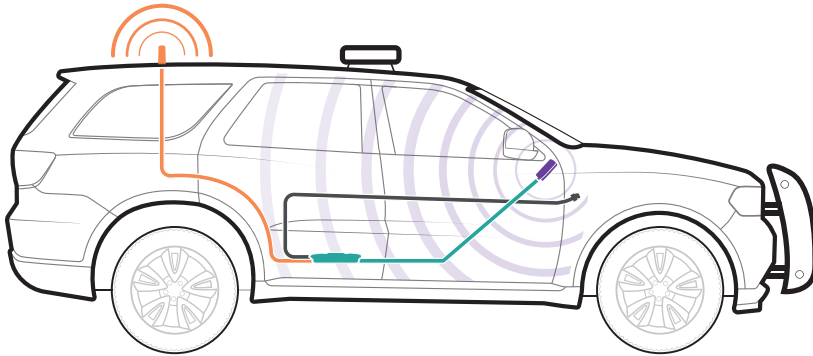

- 1 Receives signal:** The powerful antenna reaches out to access all cellular voice and data, including 4G LTE and 3G, and delivers it to the booster.
- 2 Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

Available Accessories



NMO Soft Install Bundle
900037*

Package Dimensions

10 L x 10 W x 3 H



MASTER CARTON: 36 L x 17 W x 13 H | 42 lbs. | QTY 13

Support

2 Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660
Monday to Saturday

***WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.



UPC

