| PDi | MODEL NUMBER: PD168-229 | Document Number: PD196-369R1 |
|---|---|---------------------------------|
| Communication Systems. Inc A Leader in Patient Communication Solutions™ | 50" TV Wall Mount Kit Installation Instructions | Page 1 of 2 |

SCOPE:

TO MOUNT A TV USING A PDI PD168-226 ARTICULATING WALL MOUNT KIT.

TOOL LIST

- 1. P1 OR P2, PHILLIPS SCREW DRIVER
- 2. SAFETY GLASSES/GOGGLES
- 3. LEVEL


SAFETY STEPS:

- 1. ALWAYS WEAR SAFETY GLASSES/GOGGLES TO PREVENT INJURY FROM DEBRIS.
- 2. FOLLOW THE INSTALLATION/REMOVAL INSTRUCTIONS FOR YOUR EXISTING PRODUCTS.

MOUNTING DISTANCE


16.6" MINIMUM FROM CLEVIS TO CEILING FOR 50" PLASTIC LED TV.


PROCEDURE TO MOUNT AN E50 LED TV:



STEP 1:

ATTACH THE (4) PD181-825 MOUNTING BRACKETS (#1) TO THE BACK OF THE E50 LED TV USING FOUR PDIPPHMSM6X110 SCREWS (#3).

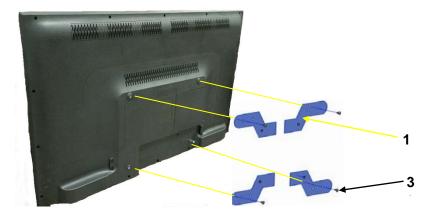



Document Number: PD196-369R1

Page 2 of 2

STEP 2:

ATTACH THE PD181-707 MOUNTING BRACKET (#2) TO THE PD181-825 MOUNTING PLATES (#1) USING FOUR PDIPPHMSM6X110 SCREWS (#4). THESE SCREWS ARE SUPPLIED WITH PD181-707 MOUNTING BRACKET KIT.



| ITEM | PART NUMBER | DESCRIPTION | QTY |
|------|----------------|--|-----|
| 1 | PD181-825 | 50" TV ADAPTER BRACKET | 4 |
| 2 | PD181-707 | ARTICULATING WALL BRACKET | 1 |
| 3 | PDIPPHMSM6X110 | M6 x 1.0 x 10mm PHILIPS HEAD SCREWS | 4 |
| 4 | PDIPPHMSM6X110 | M6 x 1.0 x 10mm PHILIPS HEAD SCREW (SUPPLIED | 4 |
| | | WITH PD181-707 KIT) | |