



Sony ES Series Projector IP Driver Release Notes

Content

Introduction...	1
Installation...	2
Configuring the device in Fusion...	2
User interface example...	7
Contact information...	9

Last modified: 9/29/15

Introduction

The release of the Sony ES Series Projector IP driver allows you to integrate Sony projectors (models listed below) with Clare Home over IP.

No software installation or download is necessary. Simply install the projector, set a static IP address, and then select the Sony 4K Projector template in Fusion.

Notes

- You must set a static IP address for the projector.
- Network Management must be enabled in the projector. If Network Management is not available, you must update the Sony firmware.

This release supports the following models:

- Sony 4K Projector - VPLVW-350ES - 2014 (IP)
- Sony 4K Projector - VPLVW-600ES - 2014 (IP)
- Sony 4K Projector - VPLVW-1000ES - 2014 (IP)
- Sony 4K Projector - VPLVW-1100ES - 2014 (IP)


Installation


Only qualified technicians should install and connect devices used with Clare Controls products. Refer to the installation instructions that came with your Sony projector. Clare Controls does not assume any responsibility for damages caused by improper installation or connection to the network.

Configuring the device in Fusion


Configure the projector in Fusion to enable use with Clare Home and the Clare Controls UI.

To add the Sony projector:


1. Access your project in Fusion.
2. Click the **Devices** tab, and then click the **New Device** button . The Select Template dialog displays.

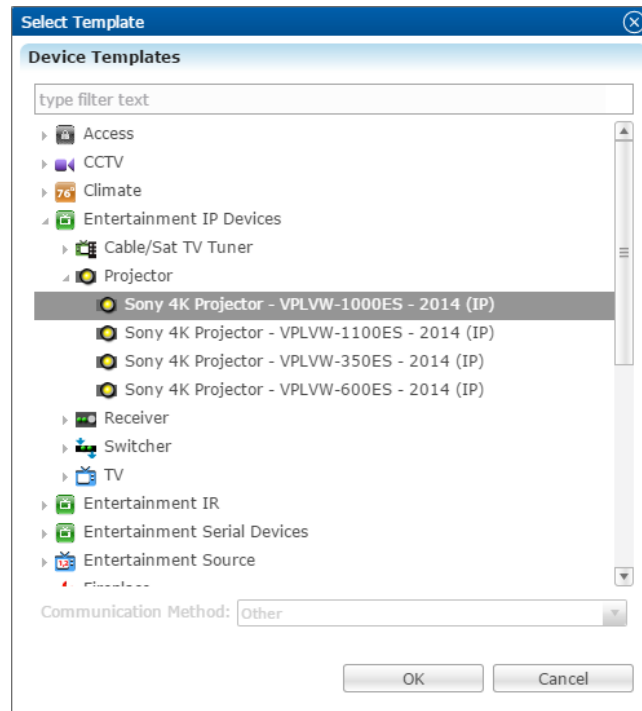

3. Browse to the desired Sony 4K projector, and then click **OK**.
Entertainment IP Devices > Projector > Sony 4K Projector
4. The **Details** tab displays, enter a name and notes for the projector.

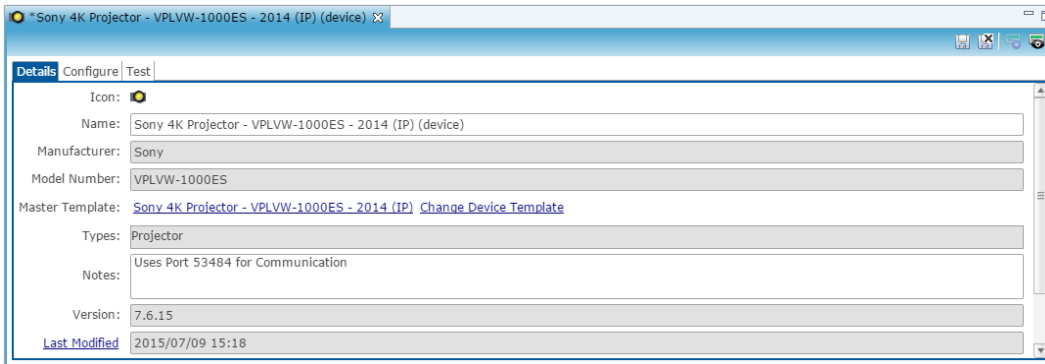


5. Click the **Configure** tab, and then enter the IP address in the **Network Address** field.

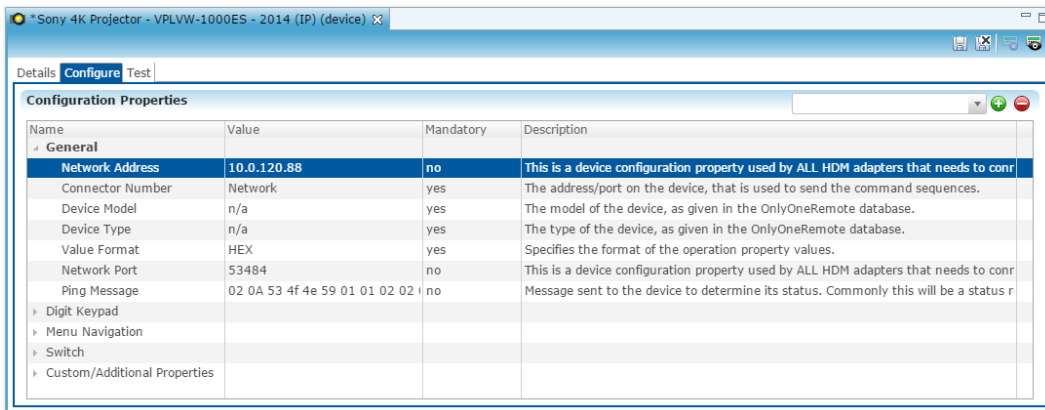


Note: The IP address must be static.


6. Verify that the **Network Port** field is set to 53484.
7. Click the **Save** button .

To create a service for the Sony projector:

1. Click the **Services** tab, and then click the **New Service Instance** button .
- The New Service Instance dialog displays.

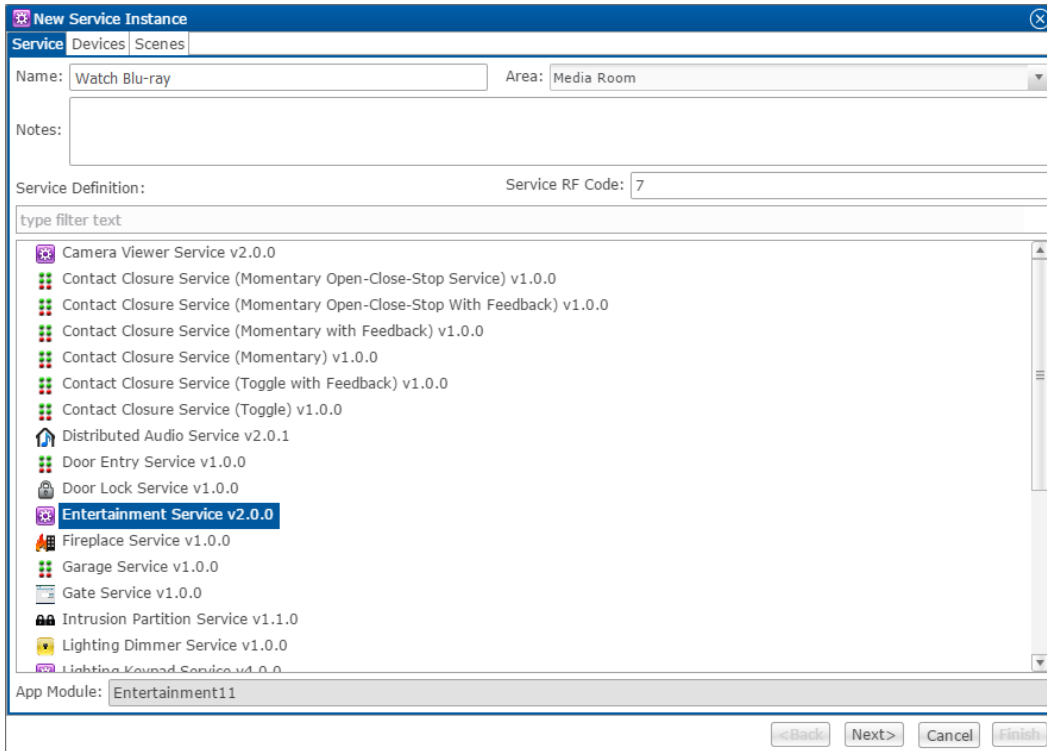


2. Enter the name of the service in the **Name** field, select the area, and then click **Entertainment Service**.
3. Click **Next** to display the **Devices** tab.

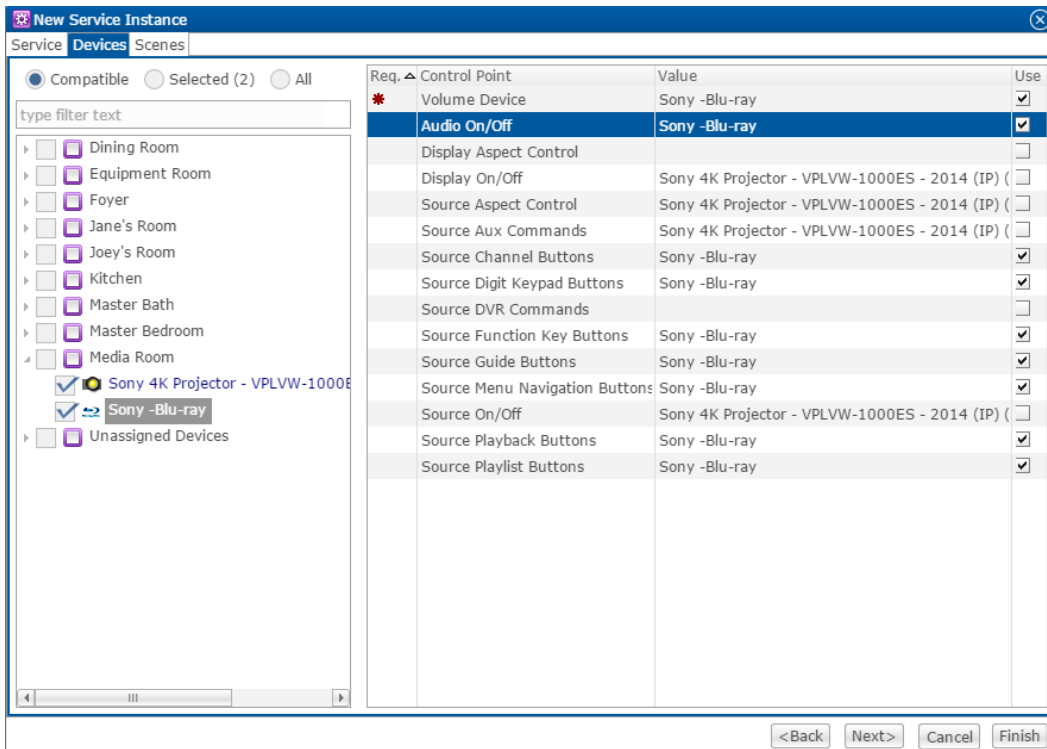


4. In the left panel, select the devices you want to use in the service.

- In the right panel, set the values for each control point.
Click the **Value** field to view the drop-down menu, and then select the device.
- Click **Next** to display the **Scenes** tab.

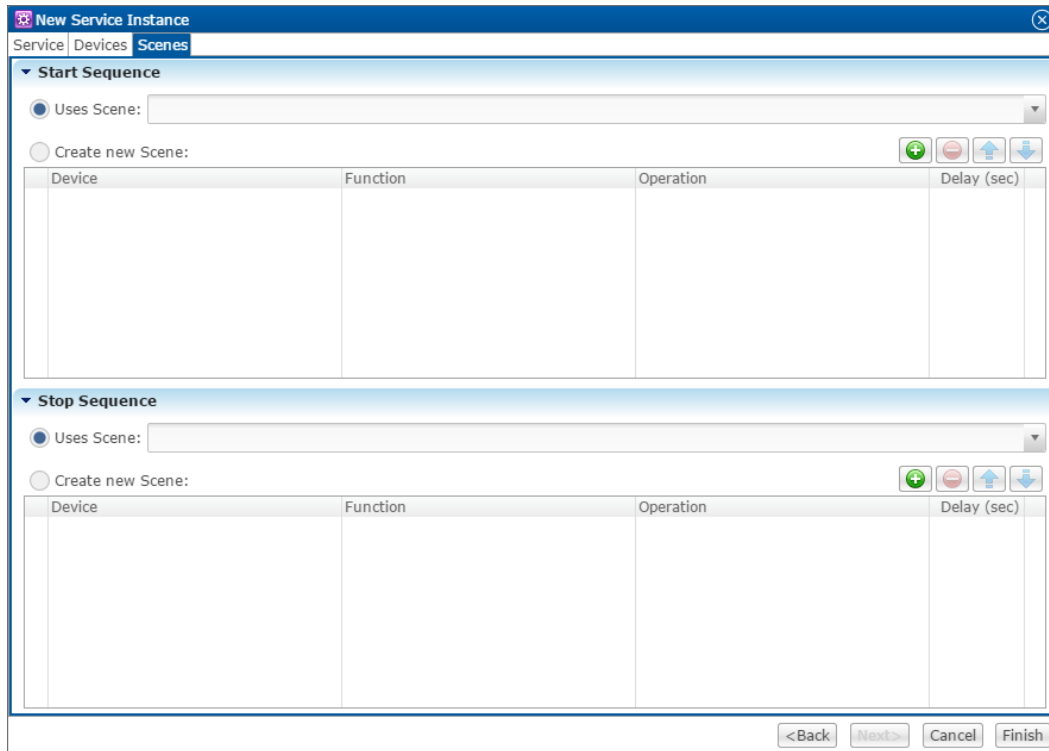

To configure the scene:

- In the **Start Sequence** field, select **Create new Scene**, and then click the **New Device Operation** button .

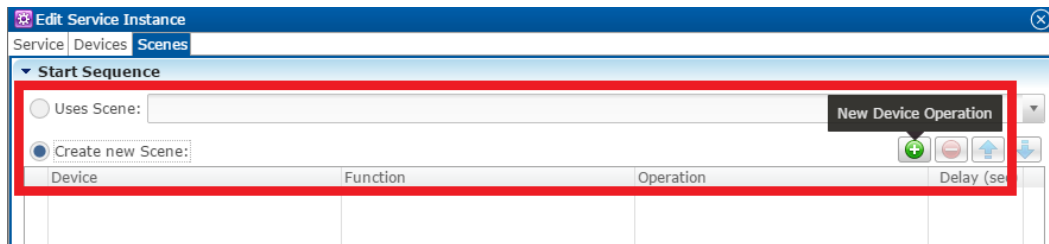



- Configure the Device, Function, and Operation drop-down menus with the following values.


Device: Select the Sony projector.

Function: Select the desired function for the projector – for example, Switch.


Operation: The desired function state – for example, Turn On.

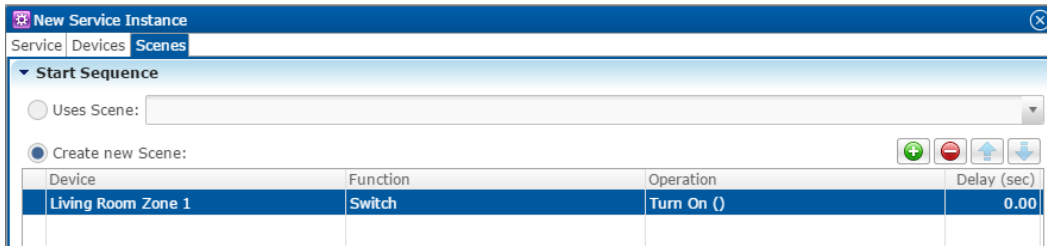

- Repeat steps 1 and 2 for each device.
- Continue to the **Stop Sequence** field, select **Create new Scene**, and then click the **New Device Operation** button .

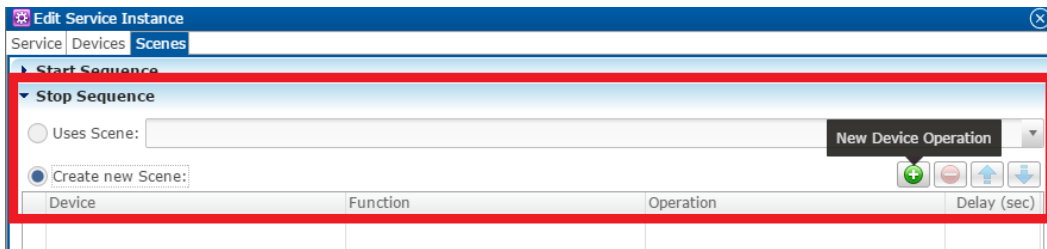

- Configure the Device, Function, and Operation drop-down menus with the desired values.

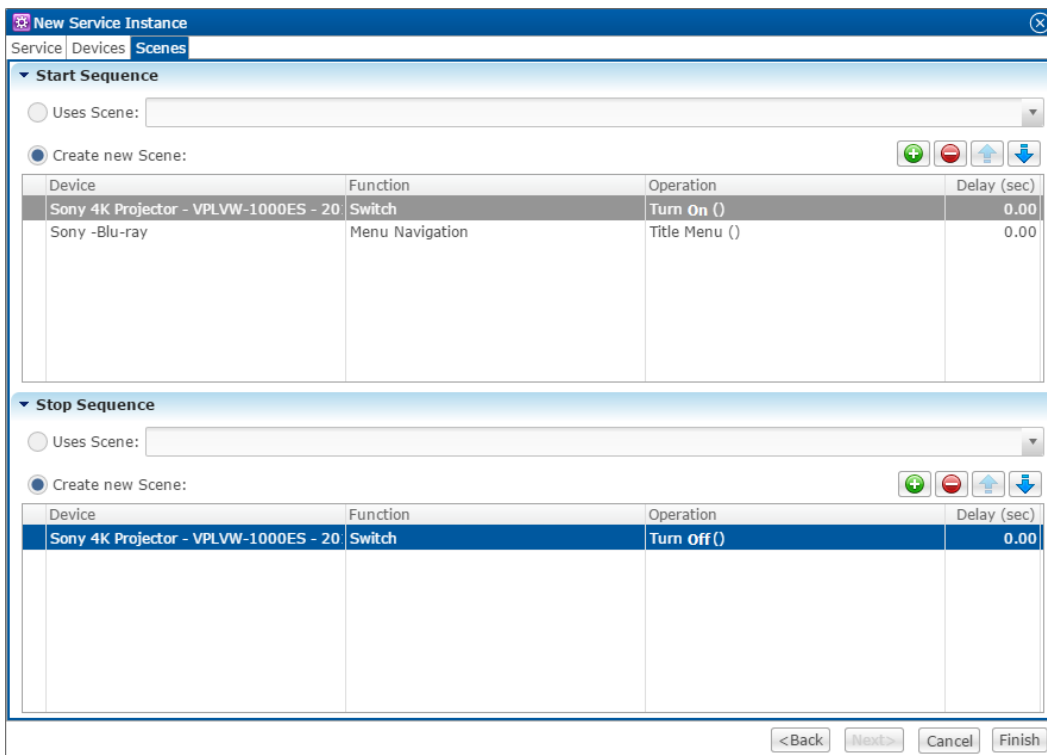




- Repeat steps 4 and 5 for each device.
- Click **Finish**.
- Deploy the project.

User interface example



Once you have configured and deployed your project, access the entertainment service created for the projector.


To access the service in the Clare Controls App:

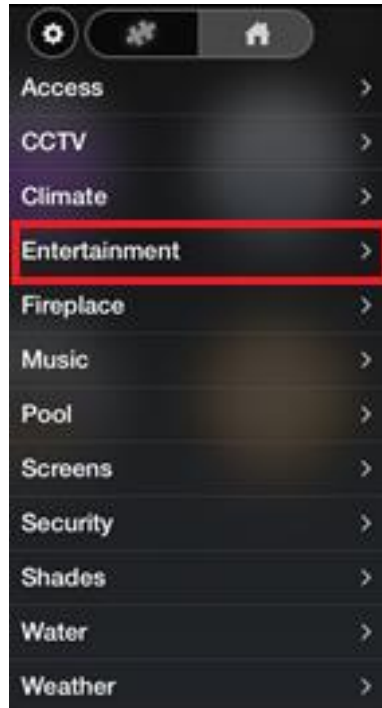
1. Tap  to run the app, and then select your user space.
2. Tap  to view the inventory page.
1. Tap **Entertainment**.




2. Tap the area that you want to access – for example, Media Room.
– or –

Tap  to add the area to your space. Return to your space and tap  to access the service.

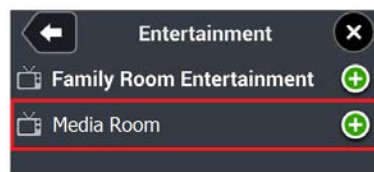

3. The area displays.
4. Tap  in the top-right corner, and then tap **Watch Blu-ray**.

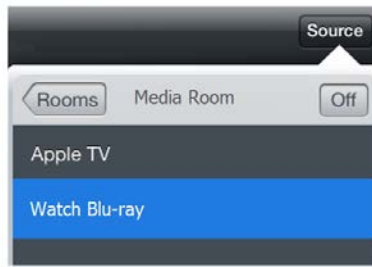

5. The service entertainment remote displays.



Note: The buttons on the virtual Clare Controls remote correspond with the configured Sony projector and Blu-ray control points.

Contact information

Clare Controls, Inc.
7519 Pennsylvania Ave, Suite 104
Sarasota, FL 34243
Support: 941.404.1072
Fax: 941.870.9646
claresupport@clarecontrols.com
www.clarecontrols.com