


DMX WALL CONTROLLER, RGB WHITE

RGBW wall mount controller designed in accordance with standard DMX512 protocol and offers accurate color tone adjustment and independent brightness dimming of each RGBW channels with unique design touch color wheel. Can control one lighting zone and enable to create and save three different scenes.

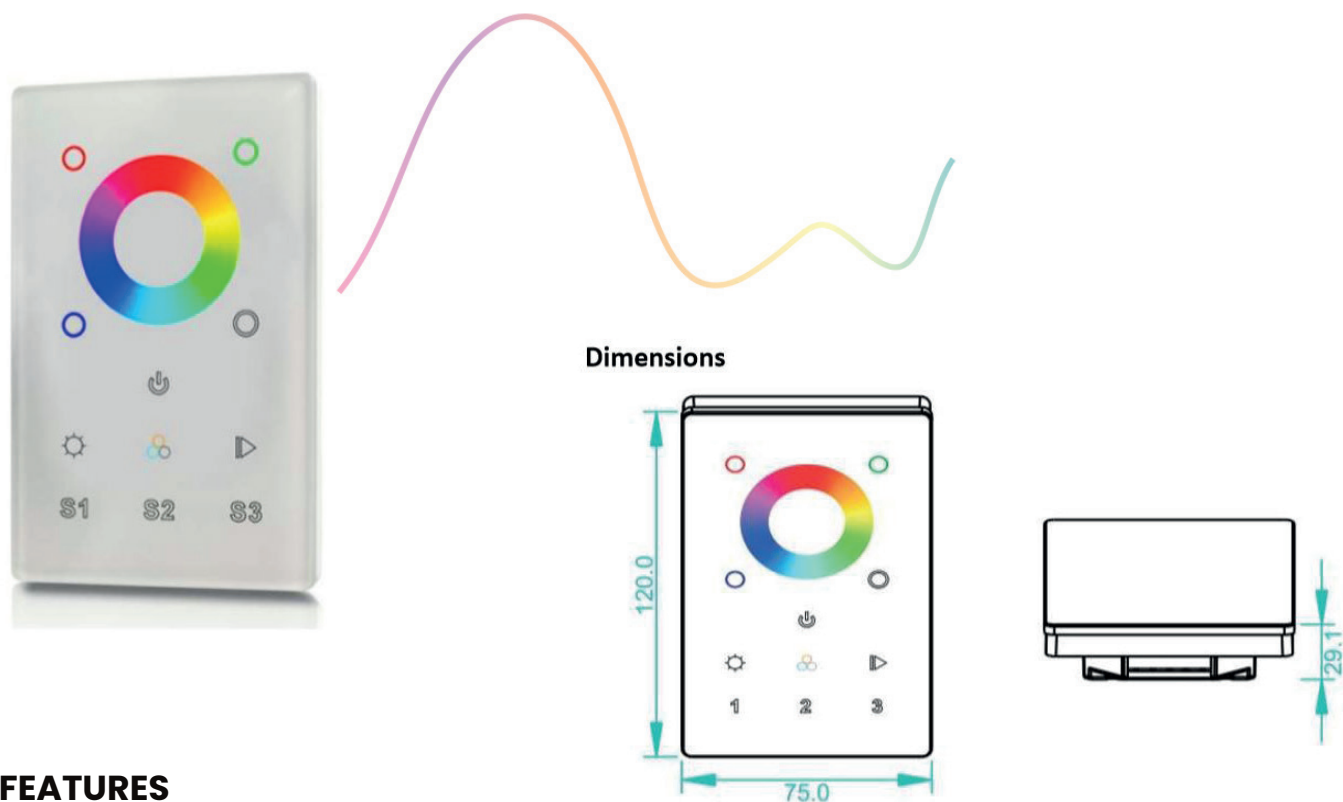


KEY FEATURES


- User-friendly interface, easy and simple operation
- Return function
- Sensitive glass touch panel available in White or Black finish
- Enable to dim brightness of each RGBW channels for endless color pallet and color changing
- Controls one zone and enable to save 3 different lighting scenes
- 10 different built-in color changing effects
- Can control many DMX decoder but as one unique zone (all decoders will use same DMX address = 001)
- Requires 4 DMX channels (001= Red, 002= Green, 003= Blue, 004= White)



Button Introduction

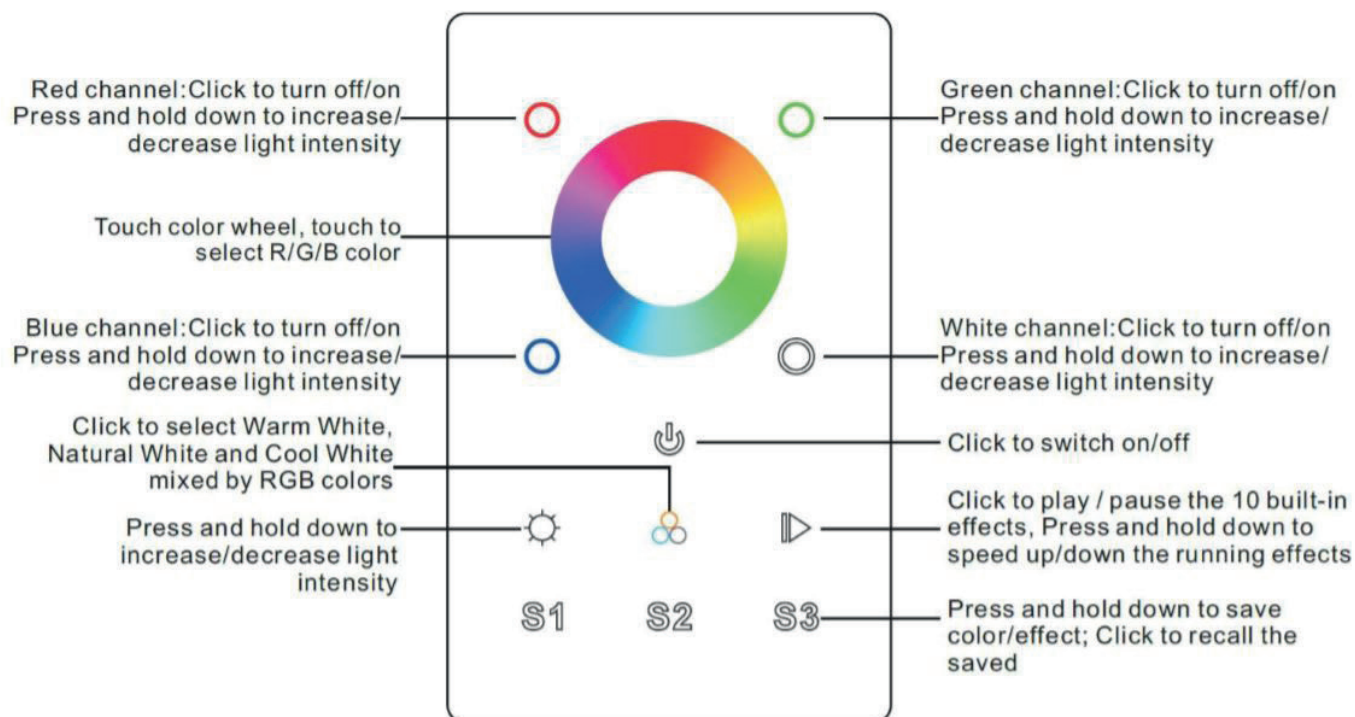

Installation

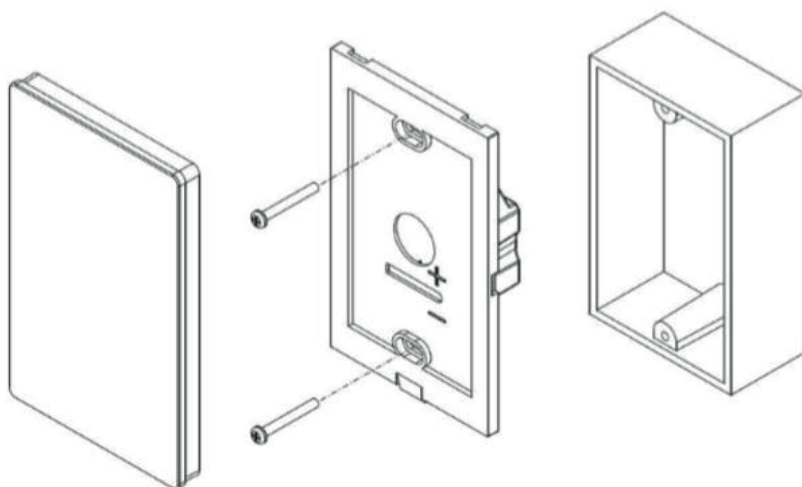

PRODUCT DATA

Output Signal	DMX512 signal
Power Supply	12-24VDC
Power consumption	200 mA
Operating Temperature	0-40°C
Relative Humidity	8% to 80%
Dimensions	75X120X29.1mm

SAFETY AND WARNING

- ▶ Do NOT install, wire, etc., with power applied to device.
- ▶ DO NOT expose the device to moisture

WIRING DIAGRAM

