

KETRA

6321 E. STASSNEY LN.
SUITE 13-400
AUSTIN, TX 78744
P: 512.347.1100

GENERAL NOTES:

1. KETRANET MESH IS KETRA'S WIRELESS CONTROL PROTOCOL.
2. A NODE IS A KETRANET MESH ENABLED WIRELESS DEVICE.
3. 50 KETRANET MESH NODES MAX. PER INSTALLATION NETWORK.
4. ALL KETRANET MESH NODES TO BE INSTALLED WITHIN 50'-0" RANGE OF THE NEAREST NODE.
5. PER N3:
MAX. FIXTURE QTY: 40FT OF G2
MAX. RUN LENGTH: 100FT
6. G2 DOES NOT SUPPORT STAR TOPOLOGIES.

FOR REFERENCE ONLY
NOT FOR
CONSTRUCTION

DRAWING TYPE: WD
DRAWING #:
REVISION #: 01
DATE: 04/08/2016
DRAWN BY: CEH
CHECKED BY: GEB
SCALE: NTS

SHEET NAME

KETRA N3 TO G2, S38
INVERTER-OUT

SHEET


1 OF 1

NOTE:
APPLIES TO ANY KETRANET
MESH ENABLED EMERGENCY
FIXTURE.

50 KETRANET MESH NODES
PER INSTALLATION NETWORK

PER N3:
MAX. FIXTURE QTY: 40 FT OF G2
MAX. RUN LENGTH: 100FT

NOTE:
G2 DOES NOT SUPPORT STAR TOPOLOGIES.

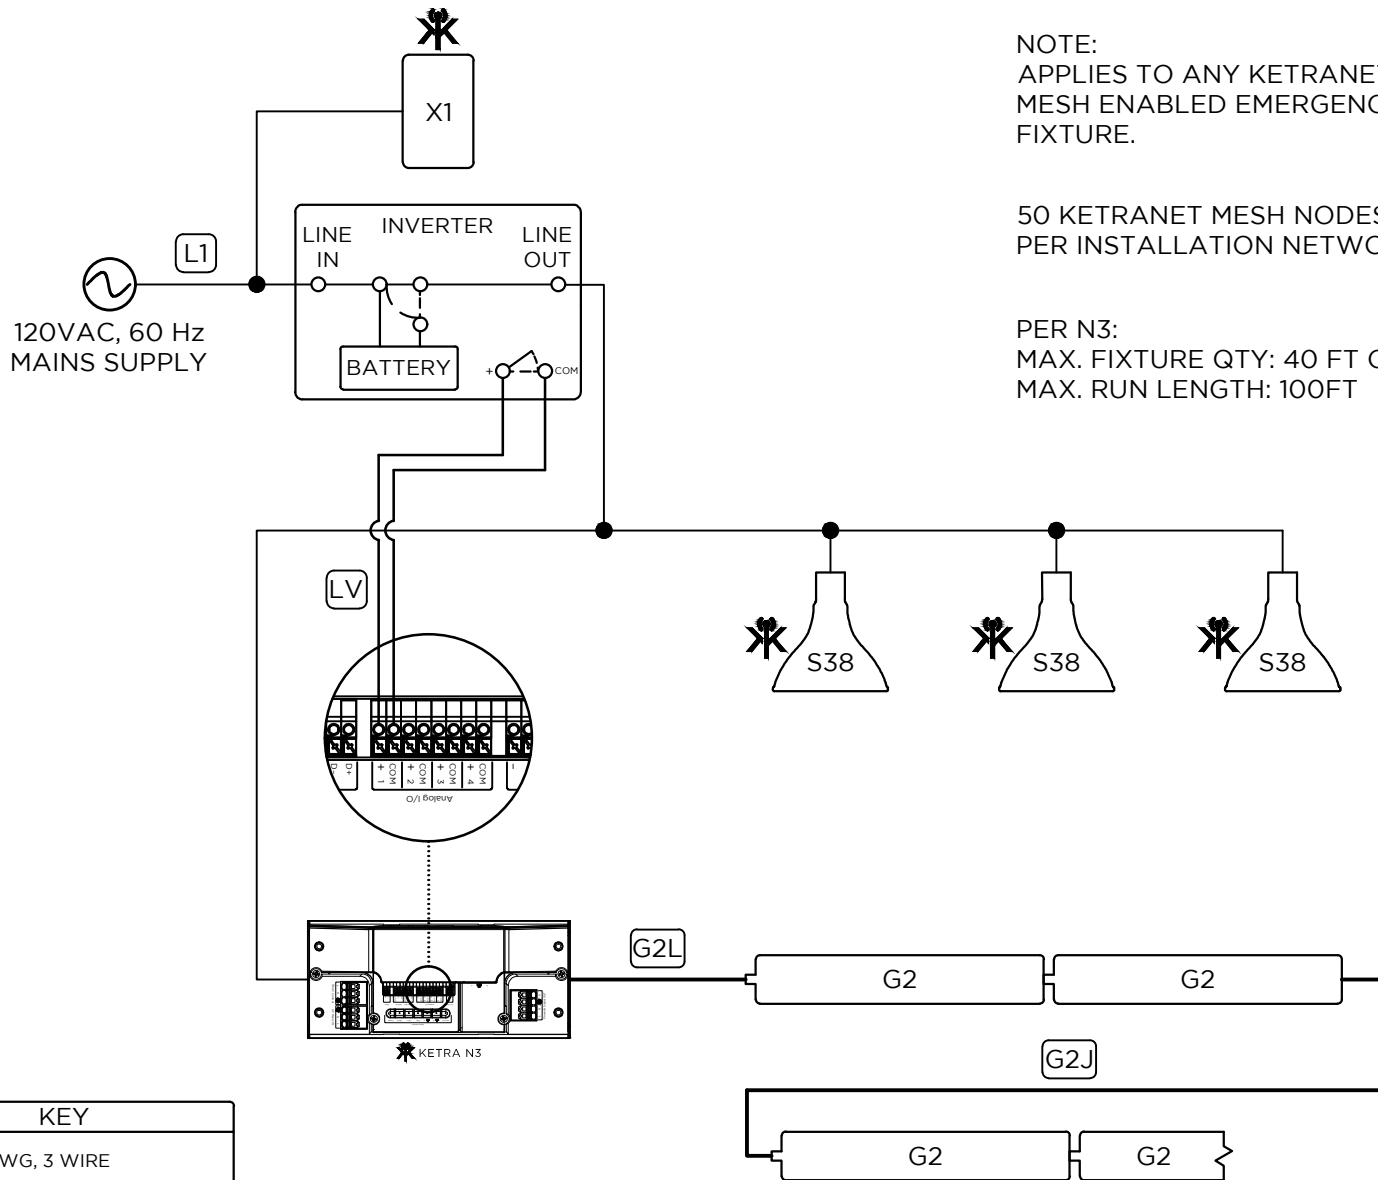

KEY	
L1	12 AWG, 3 WIRE
LV	16-24 AWG, 2 WIRE
G2L	KETRA G2 LEADER CABLE
G2J	KETRA G2 JUMPER CABLE
★	KETRANET MESH WIRELESS NETWORK