WALKER

2016

Product Guide

walkermowers.com

Dear Walker Salesperson,

We present to you the 2016 Product Guide—a valuable resource for those who sell and service the Walker product line. It is encouraging to hear from our people in the field about how this guide continues to be their go-to source for information on the Walker.

Along with the information in this booklet, we would like to point you to a few extra resources that can help you market and sell the Walker Mower.

One of the biggest advancements in our Sales and Marketing channel is the completion of thewalkeradvantage.com. The Walker Advantage presents a thorough breakdown of seven reasons why Walker Mowers are more productive than our competitors. It is also home to a Productivity Calculator that shows how switching to a Walker Mower can save owners thousands of dollars over the competition for the life of the mower. The results come from the most thorough comparison of competitive equipment in lawn mower manufacturing history.

Also, we continue to use walkerdealer.com as a resource for our dealers, and the reports from the field have been positive. Our staff has put together a solid presentation of our product that will not only support the technical needs of our program, but also greatly assist with sales and marketing of the Walker line. It is now a useful tool for every part of our program. I trust you will spend some time in each section of the Walker dealer web site.

Walker Manufacturing Company is proud to be part of your business. I wish you success in your selling efforts.

Sincerely,

Bob Walker

Bob Walker, President

TABLE OF CONTENTS

Standard Features 4

Tractor/Deck Styles 5

Tractors
- Model B18 6
- Model B19 7
- Model B23i 8
- Model B25p 9
- Model H25 10
- Model H27i 11
- Model S14 12
- Model C19 14
- Model C19i 16
- Model D21d 18
- Model T23 20
- Model T25i 22
- Model T30i 24

Interchangeable Decks
- Collection Decks 26
- Discharge Decks 27
- Mulching Decks/Kits 29
- Deck Compatibility 30

Quick-Change Implements
- Implement Hitch 31
- 42" or 50" Snow Blower 31
- 47" or 60" Rotary Broom 31
- Gauge Wheels for Rotary Broom 31
- Debris Blower 32
- Loader Bucket 32
- 48" or 60" Dozer Blade 32

Attachments
- 48" Dozer Blade Attachment 32
- 36" Single Stage Snowblower 32
- Operator Soft Cab 33
- Operator Hard Cab 33
- Front Cab Extension Flap 33
- Tail Weight 33
- ROPS (MH) 33

Operator Compartment Options
- Seats 34
- Comfort Seat 34
- Suspension Seat 34
- Armrests 34
- Headlights 34
- Instrument Panel Cover 34

TABLE OF CONTENTS

Deck Attachments
- 40" Spring Tine Dethatcher 35
- Boom Sprayer 35
- Curb Jumper Ramp 35
- Adjustable Footrests 35
- Deck Cuffs 35

Deck Control Options
- Manual Deck Height Adjuster 36
- Mechanical Deck Lift 36
- EZ Pin Puller 36
- Deck Height Washers 36

Deck Blade Options
- Break Away Blades 36

Drive Tire and Wheel Options
- Narrow Drive Tire 37
- Wide Drive Tire 37
- Low Profile Drive Tire 37
- All Terrain Drive Tire w/Spacer 37
- All Trail Drive Tire 37
- Tire Chains 37

Deck Tires and Tail Wheel Options
- Pneumatic Deck Tire 38
- Single Wide Tail Wheel 38
- Tail Wheel Lock 38
- Spread Axle Tail Wheels 38

Grass Handling System (GHS) Options
- Hi Dump™ Attachment 39
- No-Catch Deflector 39
- Power Dump (7.0/9.5/10.0) 39
- GHS Blower Lockout 39
- GHS Exhaust Screen with Large Holes 40
- Removable Bins (10.0) 40
- Dump Bag 40

Marketing Tools 41
Walker Ware 44
Fuel Consumption Chart 45

STANDARD FEATURES

- Industrial grade engines. All engines are OHV, exhaust emission certified with pressure lubrication and oil filter (except S14 with splash lubrication)
- Eaton Hydrostatic transmission and gear drive axle or Hydro-Gear® transaxles
- Gearboxes use ball or roller bearings and are permanently lubricated
- All-welded steel frame bodies and decks
- Heavy 14 gauge bodies and 11 gauge decks are welded steel construction
- Grass Handling System (GHS) air exhaust screen is removable for easy cleaning
- Industrial grade drive belts can easily be removed and replaced in the field without tools
- Belts tensioned by self-adjusting, spring-loaded idlers
- Simple mechanical belt tightener PTO clutch and band brake
- Molded polyethylene fuel tank with fuel level gauge (S14 tank integrated in Subaru Robin engine)
- Quick-disconnect splined PTO drive shaft connection speeds deck installation (bolt on PTO tube used on B18 and S14)
- Parking brake uses mechanical pin lock in axle or mechanical cog lock on Hydro-Gear® transaxles
- Gas springs with dampening action used on grass catcher door (GHS model) and tilt-open body
- Deck caster wheels pivot on ball bearings
- Mower bodies tilt open and decks tilt up for easy access to moving parts

TRACTOR/DECK STYLES

GHS TRACTORS*

Grass handling decks efficiently deliver cut material to the internal blower which then propels and compacts the debris into the catcher box. Discharge and Mulching decks can be installed on GHS tractors when catching is not required.

**Selected GHS tractor models are available in a non-collection (NC) configuration with a utility bed replacing the grass catcher and blower. NC tractors are designed to use side discharge or mulch decks that also fit on GHS tractors.*

NON-COLLECTION TRACTORS

Models B and H tractors are specifically designed for mowing with no provision for grass handling. The speed and productivity of these models make them competitive with popular mid-mount tractors. They also improve cut quality, accessibility to working parts, operator comfort and safety. B tractors use the same side discharge or mulch decks (and some implements) as GHS and NC tractors. The H uses two dedicated decks (also can use 74" side discharge deck with adapter) and a variety of implements.

DECK STYLES

Decks will fit on each tractor using a common mounting and drive system. (***GHS decks will not function on non-collection tractors, and large decks do not work well on lower horsepower tractors)***. Interchangeable decks offer extra seasonal use or multiple mowing applications for the Walker. Each deck is designed specifically for optimum performance in collection, mulch or discharge configurations.

COLLECTION DECKS

Walker collection (grass handling) decks are specifically designed for collecting grass in conjunction with the GHS style tractor. Collection decks are available in 36", 42", 48" and 52".

DISCHARGE DECKS

Walker discharge decks are specifically designed for side or rear discharging. They can be used on any style of Walker riding tractor. Side discharge decks are available in 36", 42", 48", 52", 56", 60", 62", 64", and 74". The 52", 60", and 62" decks are belt-driven decks with staggered blades for mowing wide areas with rougher mowing conditions. Note: The 52" and 64" rear discharge and 60" side discharge decks are specifically designed to work on Model H tractors.

MULCHING DECKS

Walker mulching decks are available in 36", 42" and 48" and are specifically designed to mulch. The 52" and 60" discharge decks easily convert to mulching by installing additional blades and baffles furnished in an optional kit.

This guide contains descriptions of all tractors and decks, and a compatibility chart for each available combination on Page 29

TRACTORS

B18

The B18 is offered with a Briggs & Stratton Vanguard engine and is specifically designed to use side discharge or mulching decks up to 56 inches.

- 18-hp Briggs & Stratton Vanguard, twin-cylinder, 570cc engine
- Two independent Hydro-Gear® transaxles (ZT3100) combine for an agile tractor (top ground speed of 8 mph)
- Remote Cummins Filtration OptiAir™ engine air filter for increased engine life
- Lever-actuated PTO uses belt tightener clutch/band brake for mower deck and implement drive
- Tilt-open body completely exposes drive train
- Full size garden tractor battery
- 4.0-gallon fuel tank with fuel level gauge
- Available in 50-state configuration for California

Key Engine Specifications

Manufacturer/Model	Briggs & Stratton Vanguard, 2 cyl.
Displacement	570 cc (34.8 cu. in.)
Max Power	18 @ 3600
Max Torque (ft-lbs)	29.5
Fuel	Gasoline (unleaded - min. 87 octane)
Fuel Capacity (U.S. Gal)	4.0 (15.1 liter)
Fuel Consumption (per Hour)	1.06 Gallon (4.01 liter)
Cooling System	Air
Lubrication System	Full Pressure w/ Filter

Compatible Decks

- Side Discharge - DS36, DS42, DS42(Belt Drive), DS48, DS56
- Mulching - DM36, DM42, DM48

Popular Options

- Comfort Seat
- Armrests
- Narrow Drive Tires (7.0)
- All-Terrain Drive Tires (11)
- Low-Profile Drive Tires (10.5)
- Headlights
- Mechanical Deck Lift

Attachments

- A10 - Dethatcher
- A11 - Single Stage Snowblower (Requires Kit P/N 4300-16)
- A16 - Boom Sprayer
- A32 - 48" Dozer Blade Attachment (Requires Kit P/N 4300-16)

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
Tractor	572	
Tractor & Deck°	760	40.5" H x 44"^ W x 85" L

* Approximate pounds
° Dimensions and weight shown for models equipped with 42" deck (typical)
^ 42" deck with discharge shield folded

$

List Price

TRACTORS

B19

The B19 has a simple, clean design using many of the same principles as Walker's original design. The B19 includes a powerful Kohler Command engine and simplified drive train. Side discharge or mulch decks can easily be installed using a quick connect PTO drive shaft.

- 19-hp Kohler Command, twin-cylinder, 674cc engine
- Two independent Hydro-Gear® transaxles (ZT3100) combine for an agile tractor (top ground speed of 8 mph)
- Remote Cummins Filtration OptiAir™ engine air filter for increased engine life
- Lever-actuated PTO uses belt tightener clutch/band brake for mower deck and implement drive
- Splined PTO drive shaft with Quick-Disconnect Coupler
- Tilt-open body completely exposes drive train
- Full size garden tractor battery
- 4.0-gallon fuel tank with fuel level gauge
- Available in 50-state configuration for California

Key Engine Specifications

Manufacturer/Model	Kohler CH620, 2 cyl.
Displacement	674 cc (41.1 cu. in.)
Max Power	19 @ 3600
Max Torque (ft-lbs)	35.0
Fuel	Gasoline (unleaded - min. 87 octane)
Fuel Capacity (U.S. Gal)	4.0 (15.1 liter)
Fuel Consumption (per Hour)	1.18 Gallon (4.47 liter)
Cooling System	Air
Lubrication System	Full Pressure w/ Filter

Compatible Decks

- Side Discharge - DS36, DS42, DS42(Belt Drive), DS48, DS52, DS56
- Mulching - DM36, DM42, DM48

Popular Options

- Comfort Seat
- Armrests
- Narrow Drive Tires (7.0)
- All-Terrain Drive Tires (11)
- Low-Profile Drive Tires (10.5)
- Headlights
- Mechanical Deck Lift

Attachments

- A10 - Dethatcher
- A11 - Single Stage Snowblower (Requires Kit P/N 4300-16)
- A16 - Boom Sprayer
- A32 - 48" Dozer Blade Attachment (Requires Kit P/N 4300-16)

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
Tractor	586	
Tractor & Deck°	774	40.5" H x 44"^ W x 85.5" L

* Approximate pounds
° Dimensions and weight shown for models equipped with 42" deck (typical)
^ 42" deck with discharge shield folded

$

List Price

TRACTORS

B23i

The B23i adds a 23-hp Kohler EFI engine to the agile B lineup. With increased available power, the B23i handles discharge and mulching decks up to 74" as well as a variety of seasonal attachments.

- 23-hp Kohler Command, air-cooled engine w/ Delphi® EFI system
- Two independent Hydro-Gear® transaxles (ZT3100) combine for an agile tractor (top ground speed of 8 mph)
- Remote Enginaire™ VLR engine air filter for increased engine life
- Lever-actuated PTO uses belt tightener clutch/band brake for mower deck and implement drive
- Splined PTO drive shaft with Quick-Disconnect Coupler
- Tilt-open body completely exposes drive train
- Full size garden tractor battery
- 4.7-gallon fuel tank
- Available in 50-State configuration for California

Key Engine Specifications

Manufacturer/Model	Kohler Command Pro, ECH730, EFI
Displacement	747 cc (45.5 cu. in.)
Max Power	23 @ 3600
Max Torque (ft-lbs)	38.1
Fuel	Gasoline (unleaded - min. 87 octane)
Fuel Capacity (U.S. Gal)	4.7 (17.8 liter)
Fuel Consumption (per Hour)	.83 Gallon (3.14 liter)
Cooling System	Air
Lubrication System	Full Pressure w/ Filter

Compatible Decks

- Side Discharge - DS36, DS42, DS42(Belt Drive), DS48, DS52, DS56, DS62, DS74
- Mulching - DM36, DM42, DM48, DS52 (w/ Mulch Kit)

Popular Options

- Comfort Seat
- Armrests
- Narrow Drive Tires (7.0)
- All-Terrain Drive Tires (11)
- Low-Profile Drive Tires (10.5)
- Headlights
- Mechanical Deck Lift

Attachments

- A10 - Dethatcher
- A11 - Single Stage Snowblower (Requires Kit P/N 4300-16)
- A16 - Boom Sprayer
- A32 - 48" Dozer Blade Attachment (Requires Kit P/N 4300-16)

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
Tractor	594	
Tractor & Deck°	782	40.5" H x 44"^ W x 85.5" L

* Approximate pounds
° Dimensions and weight shown for models equipped with 42" deck (typical)
^ 42" deck with discharge shield folded

$

List Price

TRACTORS

B25p

The B25p uses Kohler's Delphi® EFI propane engine to combine the great power and handling you expect from our Model B tractors with the efficient fuel economy that Delphi® EFI provides, all while using eco-friendly propane.

- 25-hp Kohler Command, air-cooled propane engine w/ Delphi® EFI system
- Two independent Hydro-Gear® transaxles (ZT3100) combine for an agile tractor (top ground speed of 8 mph)
- Remote Enginaire™ VLR air filter with integrated precleaner for extended engine life
- Lever-actuated PTO uses belt tightener clutch/band brake for mower deck and implement drive
- Splined PTO drive shaft with Quick-Disconnect Coupler
- Tilt-open body completely exposes drive train
- Full size garden tractor battery
- 33 lb./7.9-gallon fuel tank
- 50-State Compliant

Key Engine Specifications

Manufacturer/Model	Kohler Command Pro, PCH740, EFI
Displacement	747 cc (45.6 cu. in.)
Max Power	25 @ 3600
Max Torque (ft-lbs)	39
Fuel	Propane
Fuel Capacity (U.S. Gal)	33 lb. (7.9 Gallon)
Fuel Consumption (per Hour)	1.2 (4.54 liter)
Cooling System	Air
Lubrication System	Full Pressure w/ Filter

Compatible Decks

- Side Discharge - DS36, DS42, DS42(Belt Drive), DS48, DS52, DS56, DS62, DS74
- Mulching - DM36, DM42, DM48, DS52 (w/ Mulch Kit)

Popular Options

- Comfort Seat
- Armrests
- Narrow Drive Tires
- All-Terrain Drive Tires
- Low-Profile Drive Tires (10.5)
- Headlights
- Mechanical Deck Lift

Attachments

- A10 - Dethatcher
- A11 - Single Stage Snowblower (Requires Kit P/N 4300-16)
- A16 - Boom Sprayer
- A32 - 48" Dozer Blade Attachment (Requires Kit P/N 4300-16)

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
Tractor	625	
Tractor & Deck°	813	42.75" H x 44"^ W x 85.5" L

* Approximate pounds
° Dimensions and weight shown for models equipped with 42" deck (typical)
^ 42" deck with discharge shield folded

$

List Price

TRACTORS

H25

Built with the speed and price tag of a mid-mount, but with the superior design of a front cut, the H25 features Walker's proven, comfortable steering configuration and high quality grass cutting ability. The H25 is a must-have for landscape professionals, municipalities, and acreage owners.

- 25-hp Kohler Command, Air-Cooled engine
- Tilt-open body and tilt-up deck for easy maintenance
- Proven steering—a combination of Forward Speed Control (FSC) and steering levers with a top speed of 10 mph
- Deep deck design delivers Walker's trademark precision cut
- Deck height manually adjusts up to 5" using a foot pedal
- Contoured seat with full suspension action adjusts fore and aft for operator comfort
- Dual 4.7 gallon fuel tanks are controlled with an easy-to-use fuel selector valve
- Remote Cummins Filtration OptiAir™ air filter with Enginaire precleaner for extended engine life
- Dual, independent Hydro-Gear® ZT3400 transaxles
- Lever-actuated PTO uses belt tightener clutch/band brake for mower deck and implement drive
- Available in 50-state configuration for California

Key Engine Specifications

Manufacturer/Model	Kohler CH740, 2 cyl.
Displacement	725 cc (44.2 cu. in.)
Max Power	25 @ 3600
Max Torque (ft-lbs)	42.3
Fuel	Gasoline (unleaded-min. 87 octane)
Fuel Capacity (U.S. Gal)	9.4 (35.6 liter)
Fuel Consumption (per Hour)	1.4 Gallon (5.3 liter)
Cooling System	Air
Lubrication System	Full Pressure w/ Filter

Compatible Decks

- Rear Discharge - DR52, DR64
- Side Discharge - DS60
- Mulch - DS60 (w/ Mulch Kit)
- Deck Arm Adapter Kit (P/N2430-10) for using other 48" to 74" decks on MH

Popular Options

- Headlights
- ROPS
- All-Trail Tires (6.5)

Attachments

- H16 - 60" Dozer Blade
- H17 - 50" Two-Stage Snowblower
- H20 - 60" Rotary Broom

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
Tractor	752	
Tractor & Deck°	1197	46.5" H x 62" W x 107" L

* Approximate pounds

° Dimensions and weight shown for models equipped with 60" deck (typical)

$

List Price

TRACTORS

H27i

Two strong design advantages—front-cut mowing and Kohler's Delphi® electronic fuel injection system—have been brought together in the H27i. It is the ideal combination of horsepower, productivity and fuel efficiency.

- 27-hp Kohler Command, air-cooled engine w/ Delphi® EFI system
- Tilt-open body and tilt-up deck for easy maintenance
- Proven steering—a combination of Forward Speed Control (FSC) and steering levers with a top speed of 10 mph
- Deep deck design delivers Walker's trademark precision cut
- Deck height manually adjusts up to 5" using a foot pedal
- Contoured seat with full suspension action adjusts fore and aft for operator comfort
- Dual 4.7 gallon fuel tanks are controlled with an easy-to-use fuel selector valve
- Remote Cummins Filtration OptiAir™ air filter with Enginaire precleaner for extended engine life
- Dual, independent Hydro-Gear® ZT3400 transaxles
- Lever-actuated PTO uses belt tightener clutch/band brake for mower deck and implement drive
- Available in 50-state configuration for California

Key Engine Specifications

Manufacturer/Model	Kohler Command Pro ECH749, EFI
Displacement	747 cc (45.6 cu. in.)
Max Power	26.5 @ 3600
Max Torque (ft-lbs)	44.3
Fuel	Gasoline (unleaded - min. 87 octane)
Fuel Capacity (U.S. gal)	9.4 (35.6 liter)
Fuel Consumption (per hour)	1.17 gallon (4.43 liter)
Cooling System	Air
Lubrication System	Full Pressure w/ Filter

Compatible Decks

- Rear Discharge - DR52, DR64
- Side Discharge - DS60
- Mulch - DS60 (w/ Mulch Kit)
- Deck Arm Adapter Kit (P/N2430-10) for using other 48" to 74" decks on MH

Popular Options

- Headlights
- ROPS
- All-Trail Tires (10.5)

Attachments

- H16 - 60" Dozer Blade
- H17 - 50" Two-Stage Snowblower
- H20 - 60" Rotary Broom

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
Tractor	753	
Tractor & Deck°	11198	46.5" H x 62" W x 107" L

* Approximate pounds

° Dimensions and weight shown for models equipped with 60" deck (typical)

$

List Price

TRACTORS

S14

The S14 represents a significant shift in the Walker line. The nimble S14 uses Hydro-Gear® ZT3100 transaxles and has a 12.5" grass-handling blower that delivers cut material into the 7-bushel catcher. Decks up to 42 inches can be used on the S14, and a variety of implements and attachments are available. The S14 is a great machine for homeowners and large property owners.

- 14-hp Subaru Robin, single-cylinder, 404 cc engine
- Tilt-open body completely exposes drive train
- 7 bushel catcher and 12.5" grass-handling blower
- 1.9-gallon fuel tank
- 6.5 mph ground speed
- Oversized Donaldson engine air filter for increased engine life

Key Engine Specifications

Manufacturer/Model	Subaru Robin, EX40, 1 cyl.
Displacement	404 cc (24.65 cu. in.)
Max Power	14 @ 3600
Max Torque (ft-lbs)	19.9
Fuel	Gasoline (unleaded - min. 87 octane)
Fuel Capacity (U.S. gal)	1.9 (7.2 liter)
Fuel Consumption (per hour)	1.02 gallon (3.86 liter)
Cooling System	Air
Lubrication System	Mechanical Splash Lube

Popular Options

- Armrests
- Tire Chains
- Wide Drive Tire (8.5)
- Utility Bed for non-collection model

GHS System

- Dump Bag

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
NC Tractor	493	
GHS Tractor	595	
NC Tractor & Deck°	681	39.5" H x 44" W x 89" L
GHS Tractor & Deck°	766	46" H x 37.25" W x 89" L

* Approximate Pounds

° Dimensions and weight shown for:
GHS models equipped with 36" deck
NC models equipped with 42" SD deck (discharge shield folded)

$ _____ List Price (GHS)

$ _____ List Price (NC)

TRACTORS

MODEL S14 COMPATIBILITY

Compatible Decks
- Collection - DC36R, DC42, DC42R
- Side Discharge - DS36, DS42, DS42 (Belt Drive), DS48
- Mulching - DM36, DM42

Add-Ons
- A10 - Spring Tine Dethatcher
- A11 - Single Stage Snowblower (Requires Kit P/N 4300-16)
- A16 - Boom Sprayer
- A32 - 48" Dozer Blade Attachment

Available in a non-collection Model

TRACTORS

C19

A durable design combined with a powerful engine, the Model C19 provides agility, maneuverability, and high-capacity mowing. This model is a popular machine for entry into commercial mowing.

- 19-hp Kohler Command Engine
- Tilt-open body completely exposes drive train
- 7.0 bu. catcher and 10.5" grass-handling blower
- 4.0-gallon fuel tank
- Remote Enginaire™ VLR air filter with integrated precleaner for extended engine life
- Splined PTO drive shaft with Quick-Disconnect Coupler
- Low-profile drive tires (10" wheel)
- Low oil pressure warning horn
- 6.5 mph ground speed
- Available in 50-state configuration for California

Key Engine Specifications

Manufacturer/Model	Kohler Command Pro, CH620
Displacement	674 cc (41.1 cu. in.)
Max Power	19 @ 3600
Max Torque (ft-lbs)	35
Fuel	Gasoline (unleaded - min. 87 octane)
Fuel Capacity (U.S. gal)	4.0 (15.1 liter)
Fuel Consumption (per hour)	1.13 gallon (4.27 liter)
Cooling System	Air
Lubrication System	Full Pressure w/ Filter

Factory-Installed Options

- Power Dump for Grass Catcher
- Narrow Drive Tire (7.0)
- Comfort Seat

Dealer-Installed Options

- Power Dump for Grass Catcher
- Grammer Suspension Seat w/ Armrests
- Armrests
- Mechanical Deck Lift
- Tail Weight
- All-Terrain Drive Tires (11.0)
- Narrow Drive Tires (7.0)
- Tire Chains
- Headlights

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
Tractor	734	
Tractor & Deck°	925	47.25" H x 43" W x 89" L

* Approximate Pounds

° Dimensions and weight shown for models equipped with 42" deck (typical)

$

List Price

TRACTORS

MODEL C19 COMPATIBILITY

Compatible Decks
- Collection - DC36R, DC42, DC42R, DC48, DC48R
- Side Discharge - DS36, DS42, DS42 (Belt Drive), DS48, DS52, DS56, DS62
- Mulching - DM36, DM42, DM48, DS52 (w/ Mulch Kit)

Add-Ons
- H10 - Implement Hitch
- H11 - 48" Dozer Blade
- H12 - 42" Two-Stage Snowblower
- H13 - 47" Rotary Broom
- H14 - Debris Blower
- H18 - Loader Bucket
- A10 - Spring Tine Dethatcher
- A11 - Single Stage Snowblower (requires kit)
- A32 - 48" Dozer Blade Attachment (requires kit)

Tires
- Narrow Drive Tire (7.0)
- All-Terrain Drive Tire (11.0)
- Low-Profile Drive Tire (10.5)

Seats
- Comfort Seat
- Suspension Seat
- Armrests

Deck Control
- Mechanical Deck Lift

Tail Wheel
- Spread Axle

GHS System
- Power Dump
- GHS Blower Lockout
- Dump Bag
- Exhaust Screen w/ Large Holes

Miscellaneous
- Tail Weight
- Headlights
- Tire Chains

TRACTORS

C19i

The C19i provides the agility, maneuverability, and high-capacity mowing of the C19 plus it uses Kohler's Delphi® EFI technology for increased fuel economy.

- 19-hp Kohler Command Engine w/ Delphi® EFI
- Tilt-open body completely exposes drive train
- 7.0 bu. catcher and 10.5" grass-handling blower
- 4.0-gallon fuel tank
- Remote Enginaire™ VLR air filter with integrated precleaner for extended engine life
- Splined PTO drive shaft with Quick-Disconnect Coupler
- Low-profile drive tires (10" wheel)
- Low oil pressure warning horn
- 6.5 mph ground speed
- Available in 50-State configuration for California

Key Engine Specifications

Manufacturer/Model	Kohler Command Pro, ECH630
Displacement	694 cc (42.4 cu. in.)
Max Power	19 @ 3600
Max Torque (ft-lbs)	34.2
Fuel	Gasoline (unleaded - min. 87 octane)
Fuel Capacity (U.S. gal)	4.0 (15.1 liter)
Fuel Consumption (per hour)	.89 gallon (3.37 liter)
Cooling System	Air
Lubrication System	Full Pressure w/ Filter

Factory-Installed Options

- Power Dump for Grass Catcher
- Narrow Drive Tire (7.0)
- Comfort Seat

Dealer-Installed Options

- Power Dump for Grass Catcher
- Grammer Suspension Seat w/ Armrests
- Armrests
- Mechanical Deck Lift
- Tail Weight
- All-Terrain Drive Tires (11.0)
- Narrow Drive Tires (7.0)
- Tire Chains
- Headlights

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
Tractor	739	
Tractor & Deck°	930	47" H x 43.25" W x 89.25" L

* Approximate Pounds

° Dimensions and weight shown for models equipped with 42" deck (typical)

$

List Price

TRACTORS

MODEL C19i COMPATIBILITY

Compatible Decks
- Collection - DC36R, DC42, DC42R, DC48, DC48R
- Side Discharge - DS36, DS42, DS42 (Belt Drive), DS48, DS52, DS56, DS62
- Mulching - DM36, DM42, DM48, DS52 (w/ Mulch Kit)

Add-Ons
- H10 - Implement Hitch
- H11 - 48" Dozer Blade
- H12 - 42" Two-Stage Snowblower
- H13 - 47" Rotary Broom
- H14 - Debris Blower
- H18 - Loader Bucket
- A10 - Spring Tine Dethatcher
- A11 - Single Stage Snowblower (requires kit)
- A32 - 48" Dozer Blade Attachment (requires kit)

Tires
- Narrow Drive Tire (7.0)
- All-Terrain Drive Tire (11.0)
- Low-Profile Drive Tire (10.5)

Seats
- Comfort Seat
- Suspension Seat
- Armrests

Deck Control
- Mechanical Deck Lift

Tail Wheel
- Spread Axle

GHS System
- Power Dump
- GHS Blower Lockout
- Dump Bag
- Exhaust Screen w/ Large Holes

Miscellaneous
- Tail Weight
- Headlights
- Tire Chains

TRACTORS

D21d

A top-of-the-line Kubota diesel engine at the core of the Model D21d provides long life and fuel economy. It is a hard working, proven performer for commercial and municipal operators.

- 20.9-hp Kubota liquid-cooled, three-cylinder diesel engine
- Electric radiator fan with reversing self-cleaning action
- Tilt-open body and tilt-up deck for easy access and maintenance
- Shock-mounted instrument panel with warning lights and horn; also includes ignition switch, light switch (optional), water temperature gauge, voltmeter, and hourmeter
- 10.0 bu. catcher and 10.5" blower on GHS Models
- Grammer suspension seat w/ armrests standard
- Dual tail wheels for extra flotation and reduced turning resistance
- 4.7-gallon fuel tank
- Donaldson engine air filter with remote Enginaire precleaner for increased engine life
- Splined PTO drive shaft with Quick-Disconnect Coupler
- High capacity electrical system (40-amp charge)
- 6.5 mph ground speed

Key Engine Specifications

Manufacturer/Model	Kubota, D722, 3 cyl.
Displacement	719 cc (43.9 cu. in.)
Max Power	20.9 @ 3600
Max Torque (ft-lbs)	34
Fuel	Diesel Fuel (2-D)
Fuel Capacity (U.S. gal)	4.7 (17.8 liter)
Fuel Consumption (per hour)	.76 gallon (2.88 liter)
Cooling System	Liquid, Radiator
Lubrication System	Full Pressure w/ Filter

Factory Installed Options

- Hi-Dump™
- All Terrain Drive Tires (11)
- Low-Profile Drive Tires (10.5)
- Power Dump for Grass Catcher

Dealer-Installed Options

- Mechanical Deck Lift
- No-Catch Deflector
- Tail Weight
- Headlights
- Tire Chains
- Tail Wheel Lock

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
NC Tractor	787	
GHS Tractor	959	
NC Tractor & Deck°	991	37" H x 50"^ W x 91" L
GHS Tractor & Deck°	1178	49" H x 49" W x 91" L

* Approximate Pounds
° Dimensions and weight shown for models equipped with 48" deck (typical)
^ 48" deck with discharge shield folded

$

List Price

TRACTORS

MODEL D21d COMPATIBILITY

Compatible Decks
- Collection - DC36R, DC42, DC42R, DC48, DC48R, DC52R
- Discharge - DS36, DS42, DS42 (Belt Drive), DS48, DS52, DS56, DS62, DS74
- Mulching - DM36, DM42, DM48, DS52 (w/ Mulch Kit)

Add-Ons
- H10 - Implement Hitch
- H11 - 48" Dozer Blade
- H12 - 42" Two-Stage Snowblower
- H13 - 47" Rotary Broom
- H14 - Debris Blower
- H16 - 60" Dozer Blade
- H18 - Loader Bucket
- A10 - Spring Tine Dethatcher
- A11 - Single Stage Snowblower (requires kit)
- A32 - 48" Dozer Blade Attachment (requires kit)

Tires
- Narrow Drive Tire (7.0)
- Wide Drive Tire (8.5)
- All Terrain Drive Tire (11.0)
- Low-Profile Drive Tire (10.5)

Deck Control
- Mechanical Deck Lift

Tail Wheel
- Tail Wheel Lock
- Spread Axle

NOTE: Single wide tail wheel is NOT recommended on this model

GHS System
- Hi-Dump™
- Power Dump
- No-Catch Deflector
- GHS Blower Lockout
- Dump Bag
- Exhaust Screen w/ Large Holes

Miscellaneous
- Tail Weight
- Extra 10-lb Tail Weight
- Headlights
- Instrument Panel Cover
- Tire Chains

TRACTORS

T23

Popular with lawn maintenance professionals, the T23 offers the perfect balance of power, agility, durability and versatility for a wide range of mowing applications. It has been a popular choice for over twenty years.

- 23-hp, Kohler OHV V-Twin Engine
- Tilt-open body for access to engine compartment
- Shock-mounted instrument panel with warning lights and horn, also includes ignition switch, light switch (optional), voltmeter, and hourmeter
- 10.0 bu. catcher and 10.5" blower on GHS Model
- Dual tail wheels for extra flotation and reduced turning resistance
- 4.7-gallon fuel tank
- Donaldson engine air filter with remote Enginaire precleaner for increased engine life
- Splined PTO drive shaft with Quick-Disconnect Coupler
- 6.5 MPH ground speed
- Available in 50-State configuration for California

Key Engine Specifications

Manufacturer/Model	Kohler Command Pro CH680
Displacement	674 cc (41.1 cu. in.)
Max Power	23 @ 3600
Max Torque (ft-lbs)	37.9
Fuel	Gasoline (unleaded - min. 87 octane)
Fuel Capacity (U.S. gal)	4.7 (17.8 liter)
Fuel Consumption (per hour)	1.35 gallon (5.11 liter)
Cooling System	Air
Lubrication System	Full Pressure w/ Filter

Factory Installed Options

- Comfort Seat
- Grammer Suspension Seat w/ Armrests
- Hi-Dump™
- Single Wide Tail Wheel
- All-Terrain Drive Tires (11)
- Low-Profile Drive Tires (10.5)
- Power Dump for Grass Catcher

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
NC Tractor	665	
GHS Tractor	795	
NC Tractor & Deck°	868	37" H x 50"^ W x 91" L
GHS Tractor & Deck°	1014	49" H x 49" W x 91" L

* Approximate Pounds
° Dimensions and weight shown for models equipped with 48" deck (typical)
^ 48" deck with discharge shield folded

$

List Price

TRACTORS

MODEL T23 COMPATIBILITY

Compatible Decks
- Collection - DC36R, DC42, DC42R DC48, DC48R, DC52R
- Discharge - DS36, DS42, DS42 (Belt Drive), DS48, DS52, DS56, DS62, DS74
- Mulching - DM36, DM42A, DM42B, DM48, DS52 (w/ Mulch Kit)

Add-Ons
- H10 - Implement Hitch
- H11 - 48" Dozer Blade
- H12 - 42" Two-Stage Snowblower
- H13 - 47" Rotary Broom
- H14 - Debris Blower
- H16 - 60" Dozer Blade
- H18 - Loader Bucket
- A10 Spring Tine Dethatcher
- A11 - Single Stage Snowblower (requires kit)
- A32 - 48" Dozer Blade Attachment (requires kit)

Tires
- Narrow Drive Tire (7.0)
- All Terrain Drive Tire (11.0)
- Wide Drive Tire (8.5)
- Low-Profile Drive Tire (10.5)

Deck Control
- Mechanical Deck Lift

Tail Wheel
- Single Wide Tail Wheel*
- Tail Wheel Lock
- Spread Axle

*Not recommended when Hi-Dump™ is installed

Ground Drive
- Cold Start Kit

Seats
- Comfort Seat
- Suspension Seat
- Armrests

GHS System
- Hi-Dump™
- Power Dump
- No-Catch Deflector
- GHS Blower Lockout
- Dump Bag
- Exhaust Screen w/ Large Holes

Miscellaneous
- Tail Weight
- Extra 10-lb Tail Weight
- Headlights
- Instrument Panel Cover
- Tire Chains

TRACTORS

T25i

A powerful air-cooled engine with Delphi® EFI technology delivers a responsive, fuel efficient performance. This mower provides powerful acceleration and throttle response. Built-in diagnostics and a service light on the instrument panel simplify troubleshooting.

- 25-hp, Delphi Electronic Fuel Injection (EFI) Kohler OHV V-Twin Engine
- Tilt-open body for access to engine compartment
- Shock-mounted instrument panel with warning lights and horn; also includes ignition switch, light switch (optional), voltmeter, hourmeter and service light
- 10.0 bu. catcher and 10.5" blower
- 6.5 mph ground speed
- Dual tail wheels for extra flotation and reduced turning resistance
- Donaldson engine air filter with remote Enginaire precleaner for increased engine life
- 4.7-gallon fuel tank
- Splined PTO drive shaft with Quick-Disconnect Coupler
- Available in 50-State configuration for California

Key Engine Specifications

Manufacturer/Model	Kohler Command Pro ECH740, EFI
Displacement	747 cc (45.6 cu. in.)
Max Power	25 @ 3600
Max Torque (ft-lbs)	38.8
Fuel	Gasoline (unleaded - min. 87 octane)
Fuel Capacity (U.S. gal)	4.7 (17.8 liter)
Fuel Consumption (per hour)	.99 gallon (3.73 liter)
Cooling System	Air
Lubrication System	Full Pressure w/ Filter

Factory Installed Options

- Comfort Seat
- Grammer Suspension Seat w/ Armrests
- Hi-Dump™
- Single Wide Tail Wheel
- All-Terrain Drive Tires (11)
- Low-Profile Drive Tires (6.5)
- Power Dump for Grass Catcher

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
NC Tractor	672	
GHS Tractor	799	
NC Tractor & Deck	876	37" H x 50"^ W x 91" L
GHS Tractor & Deck°	1018	49" H x 49" W x 91" L

* Approximate Pounds
° Dimensions and weight shown for models equipped with 48" deck (typical)
^ 48" deck with discharge shield folded

$

List Price

TRACTORS

MODEL T25i COMPATIBILITY

Compatible Decks
- Collection - DC36R, DC42, DC42R, DC48, DC48R, DC52R
- Discharge - DS36, DS42, DS42 (Belt Drive), DS48, DS52, DS56, DS62, DS74
- Mulching - DM36, DM42A, DM42B, DM48, DS52 (w/ Mulch Kit)

Add-Ons
- H10 - Implement Hitch
- H11 - 48" Dozer Blade
- H12 - 42" Two-Stage Snowblower
- H13 - 47" Rotary Broom
- H14 - Debris Blower
- H16 - 60" Dozer Blade
- H18 - Loader Bucket
- A10- Spring Tine Dethatcher
- A11 - Single Stage Snowblower (requires kit)
- A32 - 48" Dozer Blade Attachment (requires kit)

Tires
- Narrow Drive Tire (7.0)
- Wide Drive Tire (8.5)
- All Terrain Drive Tire (11.0)
- Low-Profile Drive Tire (10.5)

Deck Control
- Mechanical Deck Lift

Tail Wheel
- Single Wide Tail Wheel*
- Tail Wheel Lock
- Spread Axle

*Not recommended when Hi-Dump™ is installed

Ground Drive
- Cold Start Kit

Seats
- Comfort Seat
- Suspension Seat
- Armrests

GHS System
- Hi-Dump™
- Power Dump
- No-Catch Deflector
- GHS Blower Lockout
- Dump Bag
- Exhaust Screen w/ Large Holes

Miscellaneous
- Tail Weight
- Extra 10-lb Tail Weight
- Headlights
- Instrument Panel Cover
- Tire Chains

TRACTORS

T30i

Operators can expect easy starting, consistent running temperatures, and user-friendly maintenance from this top-of-the-line mower. A combination of liquid cooling and EFI from Kohler's 30-hp Aegis engine provides increased engine life, power and better fuel economy compared to air-cooled engines.

- 30-hp, Kohler Aegis™ V-Twin liquid-cooled, EFI engine
- Electric radiator fan with reversing self-cleaning action
- Tilt-open body for access to engine compartment
- Shock-mounted instrument panel with warning lights and horn, also includes ignition switch, light switch (optional), water temperature gauge, voltmeter, hourmeter and service light
- 10.0 bu. catcher and 10.5" blower
- Grammer suspension seat w/ armrests standard
- Dual tail wheels for extra flotation
- Donaldson engine air filter with remote Enginaire precleaner for increased engine life
- 4.7-gallon fuel tank
- 6.5 mph ground speed
- Splined PTO drive shaft with Quick-Disconnect Coupler

Key Engine Specifications

Manufacturer/Model	Kohler Aegis LH775, EFI
Displacement	747 cc (45.6 cu. in.)
Max Power	30 @ 3600
Max Torque (ft-lbs)	44.6
Fuel	Gasoline (unleaded - min. 87 octane)
Fuel Capacity	4.7 gallon (17.8 liter)
Fuel Consumption (per hour)	.98 (3.69 liter)
Cooling System	Liquid, Radiator
Lubrication System	Full Pressure w/ Filter

Factory Installed Options

- Hi-Dump™
- Single Wide Tail Wheel
- All-Terrain Drive Tires (11)
- Low-Profile Drive Tires (10.5)
- Power Dump for Grass Catcher

Quick Reference Dimensions

Tractor	Weight*	Overall Dimensions
GHS Tractor	898	
GHS Tractor & Deck°	1117	49" H x 49" W x 91" L

* Approximate Pounds
° Dimensions and weight shown for models equipped with 48" deck (typical)

$

List Price

TRACTORS

MODEL T30i COMPATIBILITY

Compatible Decks
- Collection - DC36R, DC42, DC48, DC48R, DC52R
- Discharge - DS36, DS42, DS42 (Belt Drive), DS48, DS52, DS56, DS62, DS74
- Mulching - DM36, DM42, DM48, DS52 (w/ Mulch Kit)

Add-Ons
- H10 - Implement Hitch
- H11 - 48" Dozer Blade
- H12 - 42" Two-Stage Snowblower
- H13 - 47" Rotary Broom
- H14 - Debris Blower
- H16 - 60" Dozer Blade
- H18 - Loader Bucket
- A10 - Spring Tine Dethatcher
- A11 - Single Stage Snowblower (requires kit)
- A32 - 48" Dozer Blade Attachment (requires kit)

Tires
- Narrow Drive Tire (7.0)
- Wide Drive Tire (8.5)
- All Terrain Drive Tire (11.0)
- Low-Profile Drive Tire (10.5)

Deck Control
- Mechanical Deck Lift

Tail Wheel
- Single Wide Tail Wheel*
- Tail Wheel Lock
- Spread Axle

*Not recommended when Hi-Dump™ is installed

Ground Drive
- Cold Start Kit

Seats
- Comfort Seat
- Suspension Seat
- Armrests

GHS System
- Hi-Dump™
- Power Dump
- No-Catch Deflector
- GHS Blower Lockout
- Dump Bag
- Exhaust Screen w/ Large Holes

Miscellaneous
- Tail Weight
- Extra 10-lb Tail Weight
- Headlights
- Instrument Panel Cover
- Tire Chains

INTERCHANGEABLE DECKS

COLLECTION DECKS

- Available in 36"*, 42", 48" and 52"
- Two blades, gear-driven
- See individual tractor descriptions and chart (Page 29) for deck compatibility
- Decks come standard with "no-flat" tires from factory

36" decks should be paired with Narrow Drive Tires for optimal results

Options:
- Pneumatic rubber deck tire (dealer installed - see Page 37)
- Heavy Duty Blade Drive (Factory Option, Standard on DC52R)

Standard Rotation Decks

- DC42 and DC48 decks use standard rotation blades–counter-rotating toward the center of the deck to throw material directly into the discharge chute.

DC42	$

DC48	$

Reverse Rotation Decks

- DC36R, DC42R, DC48R and DC52R decks use reverse rotation blades–rotating away from the center instead of into the center. Reverse rotation decks are easily identified by the taper of the deck housing at the rear of the deck going into the chute.

DC36R	$

DC42R	$

DC48R	$

DC52R	$

INTERCHANGEABLE DECKS

DISCHARGE DECKS

- Available in 36"*, 42", 48", 52", 56", 60", 62" and 74"
- Two blades (36" to 48"), Three blades (52" to 62"), Four blades (74"), gear-driven or belt-driven
- See individual tractor descriptions and chart (Page 29) for deck compatibility
- Decks come standard with "no-flat" tires from factory (Pnuematic Tires Come standard on DS52, DS56, DS60, DS62, DS74)

**36" decks should be paired with Narrow Drive Tire for optimal results*

Options:

- Pneumatic rubber deck tire (dealer installed - see Page 37)
- Heavy Duty Blade Drive (Factory Option, Standard on DS56 and DS74)

DS36	$

DS42	$

DS42 BELT DRIVEN	$

DS48	$



DS52 BELT DRIVEN	$

DS56	$

DS60 BELT DRIVEN	$



DS62 BELT DRIVEN	$

DS74	$

INTERCHANGEABLE DECKS

DISCHARGE DECKS (CONTINUED)

REAR DISCHARGE DECKS

- 52” or 64” combination mulch/rear discharge
- Fits MH tractors only
- Belt-driven, three blade design
- Same height adjustment mechanism as DS60

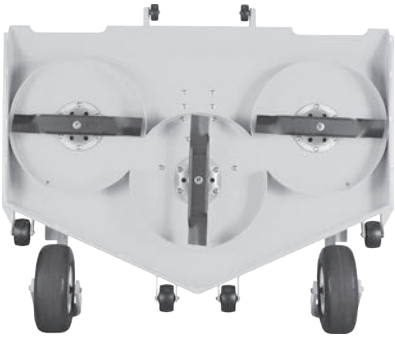

DR52	$

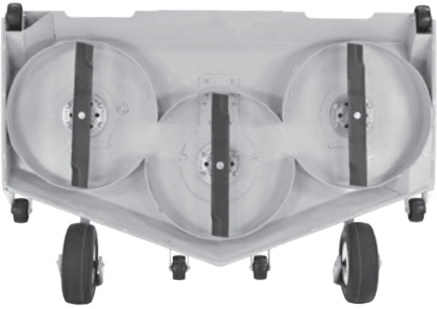

DR64	$

INTERCHANGEABLE DECKS

MULCHING DECKS

- Available in 36"*, 42" and 48"
- Two blades, gear-driven (M42B uses cross blades and M48 have blade hubs with integral circulator blades)
- See individual tractor descriptions and chart (Page 29) for deck compatibility

**Narrow drive tires should be used on tractors with 36" deck*

Options:

- Pneumatic rubber deck tire (dealer installed - see Page 37)
- Heavy duty blade drive standard on DM42 and DM48 decks (not available for DM36)

DM36	$

DM42	$

DM42A	$

DM42B	$

DM48	$

MULCHING KITS

52" (P/N 8691) & 60" (P/N 2691-10) Mulching Kits

Installation kits to convert 52" and 60" Side Discharge decks. See individual tractor descriptions for deck compatibility

$	$
List Price (2691-10)	List Price (8691)



INTERCHANGEABLE DECKS

DECK COMPATIBILITY

COLLECTION DECKS

	MT	MB	MH	MC	MD	MS
36" *	●			●	●	●
42" **	●			●	●	●
48" **	●			●	●	
52" *	●				●	

* Reverse rotation
** Available in standard and reverse rotation

DISCHARGE DECKS

	MT	MB	MH	MC	MD	MS
36"	●	●		●	●	●
42" **	●	●		●	●	●
48"	●	●	▲	●	●	●
52" *	●	^	▲	●	●	
52"RD*			●			
64"RD*			●			
56"	●	●	▲	●	●	
60" *			●			
62" *	●	^	▲	●	●	
74"	●	#	▲		●	

* Belt drive
** Available in gear and belt drive
^ MB19, MB23i, MB25p can use DS52 and DS62
# MB23i and MB25p can use DS74
▲ Requires Deck Arm Adapter Kit P/N 2430-10

MULCHING DECKS

	MT	MB	MH	MC	MD	MS
36"	●	●		●	●	●
42	●	●		●	●	●
42" (A)	●	●		●	●	●
42" (B)	●	●		●	●	●
48"	●	●	▲	●	●	
Kit 52"	●	^	▲	●	●	
Kit 60"			●			

▲ Requires Deck Arm Adapter Kit P/N 2430-10
^ MB23i and MB25p can use DS52 w/ Mulch Kit

Note: 36" Decks require change to Narrow drive tires (18 x 7.0-8)

QUICK-CHANGE IMPLEMENTS

IMPLEMENT HITCH

Five implements mount interchangeably on the Walker tractor using the quick-change hitch system. The hitch assembly replaces the mower deck and installs on the tractor in less than a minute. Implements then slide onto the hitch and lock in place with the flip of a lever for true "quick-change" capability. The hitch assembly also includes operator footrests and an electric power lift – just the touch of a switch raises and lowers implements. The lift control switch is quadrant mounted on the Forward Speed Control lever for convenient operation. (Note: Tail weight counterbalance is required for lifting implements. See Tail Weight options on Page 33).

1. Lift Control Switch
2. Operator Footrest
3. Hitch Locking Lever
4. Implement Hitch Tongue
5. PTO Cover

- Fits on all Walker riding tractors except MS or MB (H19 fits MH)
- For use with Debris Blower, Rotary Broom, 48" Dozer Blade, Loader Bucket, and 42" and 50" Snow Blower
- P/N # H10 or H19 (MH)

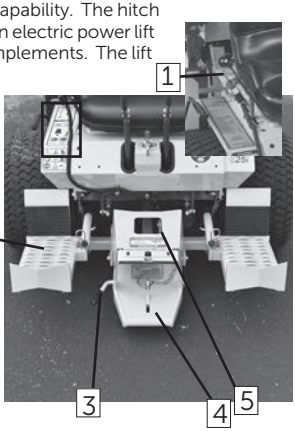

H10	$

H19	$

42" & 50" SNOWBLOWER*

- Powerful two-stage blower
- Discharge spout has 180° of adjustment from the operator seat
- Throws snow up to 40 feet
- Optional Operator Soft Cab (MD/MT only) or Hard Cab (MH) recommended
- Available for use on MC, MD, MT, and MH Tractors
- P/N # H12 (42") or H17 (MH - 50")

H12	$

H17	$

47" & 60" ROTARY BROOM*

- Five-position angle head
- Useful for lawn dethatching and raking, and for sweeping debris or light snow on hard surfaces
- H13 for use on MC, MD, and MT. H20 used on MH
- P/N # H13 or H20

H13	$

H20	$

Gauge Wheels for Rotary Broom

- Two side-mounted 6" wheels control depth of engagement
- P/N I391

$

List Price (I391)

*Requires Implement Hitch

QUICK-CHANGE IMPLEMENTS

DEBRIS BLOWER*

- 13-1/2" blower with 125-MPH velocity
- Available for use on all Walker riding tractors (except MH)
- P/N # H14

H14	$

LOADER BUCKET*



- Versatile landscaping tool will push, scoop, haul and grade dirt, gravel and mulch
- Lifts approximately 180 lbs and 2.25 cubic feet of material with 14" ground clearance
- Available for use on Walker riding tractors MC, MD, MT
- P/N # H18

H18	$

48" & 60" DOZER BLADE*



- Five-angle positioning and spring trip action
- Useful for moving snow, dirt and gravel
- Available for use on all Walker riding tractors (except B18/B19)
- P/N # H11 or H16 (H16 used on MH, MT, MD

H11	$

H16	$

ATTACHMENTS

48" DOZER BLADE ATTACHMENT

- Incorporates Walker designed blade and quick angle adjust
- Includes integrated hitch with manual lift (implement hitch not required)
- Optional power lift kit available (P/N 6622-11)
- Fits all models (except MH)
- P/N # A32 (req. Kit #4300-16 for MS, MB or Kit #5628-10 for MC, MD, MT)

A32	$

36" SINGLE STAGE SNOWBLOWER



- High-speed, clog-resistant auger throws snow up to 20 feet
- Includes integrated hitch with manual lift (implement hitch not required)
- 180° manual directional chute
- Fits all models except MH, narrow (7") drive tires required.
- Item # A11 (req. Kit #4300-16 for MS & MB or Kit #5628-10 for MC, MD, MT)

A11	$

*Requires Implement Hitch

ATTACHMENTS

OPERATOR SOFT CAB

- Shields operator from winter weather when using Snow Blower, Rotary Broom, and Dozer Blade
- Hinged door with glass windshield, electric windshield wiper, and headlights
- Available for use on Models D & T (excluding T30i) tractors
- P/N #A14

A14	$

Front Cab Extension Flap (P/N 7661-4)

- Protects operator when using Dozer Blade - not recommended for implements using a PTO drive shaft

$

List Price (P/N 7661-4)

OPERATOR HARD CAB

- Shields operator from winter weather when using Snow Blower, Rotary Broom, and Dozer Blade
- Hinged door with glass windshield, electric windshield wiper, headlights, and circulation fan
- Available for use on MH tractors
- P/N #A33

A33	$

TAIL WEIGHT

Counterbalance for add-ons

- MB - 10-lb, P/N 2647-3
- MC/MD/MT - 85-lb, P/N 7647
- MH - 50-lb, P/N 2647-10
- Extra 10-lb weight, MD/MT/MB, P/N 7647-5

$

List Price (2647-3)

$

List Price (2647-10)

$

List Price (7647)

$

List Price (7647-5)

ROPS (MH)

- Optional bolt-on kit
- Includes seat belt
- Stationary/foldable bar
- Available for MH only
- P/N #A30

A30	$

OPERATOR OPTIONS

SEATS

Comfort Seat

- Built-up (not molded) with steel frame, extra thick foam padding
- Removable/replaceable covers
- Optional armrests (see armrests below)
- Available for all tractors (Except H models)
- P/N 6103-5

$

List Price (6103-5)

Grammer Suspension Seat

- Full-spring suspension with dampening
- Adjustments for back angle, lumbar support, and operator weight
- Standard with armrests
- Available for Models C, D, & T
- P/N 6103-24

$

List Price (6103-24)

ARMRESTS

- Used for operator comfort and security,
- Fold up when not in use
- Seat Kit #
  Standard 5885
  Comfort 6103-17

$

List Price (5885)

$

List Price (6103-17)

HEADLIGHTS

- Halogen, sealed beam lights mounted within a shock-absorbing housing
- Mounting arm includes integral light guards
- P/N 5989-11 (MB/MC)
  P/N 7989-11 (MD/MT)
  P/N 2989-11 (MH)

$

List Price (2989-11)

$

List Price (7989-11)

$

List Price (5989-11)

INSTRUMENT PANEL COVER

- Protects MD/MT instrument panel when parked outdoors or trailered in rain or snow
- P/N 7307-2

$

List Price (7307-2)

DECK ATTACHMENTS

40" SPRING TINE DETHATCHER

- Excellent for spring cleanup
- Clips on the front of 36", 42", 48", or 52" gear driven decks with no tools
- When used with GHS vacuum, lawn thatch and debris are removed in one pass
- Gauge wheels and hinged frame allow the dethatcher to closely follow terrain
- P/N #A10

A10	$

BOOM SPRAYER

- 25-gallon tank mounts on 42" to 62" decks
- Offers a 96" spray pattern
- Spray gun with a 20 ft. hose and adjustable spray tip allow for mist or adjusts to a 35 ft. stream
- Mounting on 52" & 62" decks requires two (2) P/N B037 Rear Sprayer Supports
- P/N #A16

A16	$

CURB JUMPER RAMP

- 40" wide curb ramp allows all Walker models to easily back over standard curbs
- Stows as a footrest on 42" and 48" gear driven decks when not in use
- Molded handle for easy lifting
- P/N #5597 or 5597-1 for use with Deck Height Adjuster

$	$
List Price (5597)	List Price (5597-1)

ADJUSTABLE FOOTRESTS



- Adjustable footrest clamps on carrier frame of 36", 42", 48", 52" and 74" decks
- Easy to install and adjust
- P/N #8662-10
  P/N #8662-9 (74")

$	$
List Price (8662-10)	List Price (8662-9)

DECK CUFF KITS

- Increases effective cutting width of deck by acting as a channel to direct grass under deck that would otherwise follow radius of deck and lay over
- DC36R - P/N #7704-2
  DC48 - P/N #7704-4
  DC52R - P/N #7704-5

$	$	$
List Price (7704-2)	List Price (7704-4)	List Price (7704-5)

DECK CONTROL & BLADE OPTIONS

MANUAL DECK HEIGHT ADJUSTER

- Mechanism allows operator to make 1/4"adjustments from the seat
- Replaces four deck height adjustment pins
- Dealer-installed kits for 36", 42", 48", 52", 56" & 62" decks
- 36" Kit, P/N #A22 $
- 42" Kit, P/N #A23 $
- 48" Kit, P/N #A24 $
- DC52 Kit, P/N #A25* $
- DS52 Kit, P/N #A26 $
- DS56 Kit, P/N #A28 $
- DS62 Kit, P/N #A27 $

* also fits DC48R



New style carrier frame required to install this kit

MECHANICAL DECK LIFT

- Raises the deck to a transport position
- Useful for transporting on large jobs between mowing areas
- Prevents "wear and tear" on deck
- Does not work with suspension seat
- Available for use on all tractors (except Models S & H)
- Kit P/N 8645 or #4645 (MB)



$ List Price (8645)

$ List Price (4645)

EZ PIN PULLER

- Easily removes height adjustment hitch pins
- Standard equipment for 52", 62" & 74" decks
- Kit P/N 8770

$ List Price (8770)

DECK HEIGHT WASHERS

- Allows fine adjustment of cutting height
- Finer adjustment than 1/2-inch increments
- P/N 5727-1 (36", 42", 48", 52", 56" gear drive decks) - Dimensions are 1/4" x 5/8" x 1-3/8"
- P/N 8727 (52", 62", 74" belt drive decks) - Dimensions are 1/4" x 13/16" x 1-3/4"

$ List Price (5727-1)

$ List Price (8727)

BREAK AWAY BLADES

- Blades mount on break-away hub
- For use in mowing applications with lots of ground contact and debris; minimizes blade damage and impact and shock loading on deck and drive train
- Available on DS42, 48, 56 and 74 decks
  5705-33 (42" Deck) 7705-8 (48" Deck)
  5705-32 (56" Deck) 5705-34 (74" Deck)

$ List Price (5705-33)

$ List Price (5705-32)

$ List Price (7705-8)

$ List Price (5705-34)

DRIVE TIRES & WHEEL OPTIONS

NARROW DRIVE TIRE

- 18 x 7.00-8
- Used when 36" mower deck is installed on MS, MB, MC, MD, or MT
- Standard on MS
- P/N 5033-6

$

List Price (5033-6)

WIDE DRIVE TIRE

- 18 x 8.50-10
- Used to upgrade MS with 42" deck installed
- Standard on MB and MC
- P/N 5075-1

$

List Price (5075-1)

LOW PROFILE DRIVE TIRE

- 18 x 10.50-10
- Improves flotation, traction, and hillside stability for MB, MC, MD, MT tractors
- Should be used with 48" or larger deck installed
- MC/MD/MT Require 1/2" spacer (P/N 8070-31)
- P/N 8075

$

List Price (8070-31)

ALL TERRAIN DRIVE TIRE

- 18 x 11-10
- Aggressive bi-directional, extra wide tread offers best hillside traction
- For use on MB, MS, MC, MD, MT tractors
- For use with 48" or larger deck installed
- MC/MD/MT Require 1/2" spacer (P/N 8070-31)
- P/N 8070-6

$

List Price (8070-6)

ALL TRAIL DRIVE TIRE (MH)

- 23 x 10.5-12
- Aggressive bi-directional, extra wide tread offers best hillside traction
- For use on MH tractors
- P/N 2071-2

$

List Price (2071-2)

TIRE CHAINS

- Kits include 1/2" spacer (P/N 8070-31) to provide extra frame clearance with chains installed

Tire Size	Part No.	List Price
18 x 7-8	5675	$
18 x 8.50-8	5675-2	$
18 x 9.50-8	5675-3	$
22 x 10.50-12	5675-6	$

DECK TIRES & TAIL WHEEL OPTIONS

PNEUMATIC RUBBER DECK TIRE

- For use on gear drive decks (36"-56")
- Tire & Wheel Assembly (P/N 5715-13)
- Axle Spacer Tube (P/N 5714-6)

$ List Price (5715-13)

$ List Price (5714-6)

SINGLE WIDE TAIL WHEEL

- Used in applications cutting high in soft grass where the dual tire track is objectionable (finished cut does not look smooth)
- Replaces standard dual tail wheels on MT
- The single tire does slightly increase turning resistance and is not recommended for use on the Model MD or any tractor equipped with a Hi-Dump™
- Kit P/N 8049

$ List Price (8049)

TAIL WHEEL LOCK

- Locking solenoid locks tail wheel into "straight ahead" position for striping and hillside work
- Controlled from toggle switch on Forward Speed Control
- Manual override is accomplished by a hard pull on one steering lever
- Available for MD/MT only
- Kit #8540

$ List Price (8540)

SPREAD AXLE TAIL WHEELS

- Advantages: Tail wheels on spread axle track behind drive tires and offer a smoother ride
- Disadvantage: Reduces maneuverability in tight spaces due to tail wheel swinging out
- Available for MC, MD & MT
- P/N 7420-3 (MC/MD/MT),
  P/N 7420-8 (additional parts for MD),
  P/N 7420-20 (wheels assembly)

$ List Price (7420-3)

$ List Price (7420-8)

$ List Price (7420-20)

GRASS HANDLING SYSTEM (GHS) OPTIONS

HI-DUMP™

- Unique option for handling grass on MD and MT tractors
- Raises catcher up 67 inches
- 20 second cycle time
- Lifting and dumping work independently and are controlled from the seat by toggle switches
- Sturdy construction adds only 150 pounds to tractor
- Assembly bolts on in the field with minimal labor, or may be ordered as factory-installed option
- Catcher box is mounted only 3 inches higher to maintain tractor stability and low center of gravity
- 200-lb maximum lift rating
- Kit P/N A21 (10.0 catcher)

A21	$

NO-CATCH DEFLECTOR

- Installed in catcher door to convert GHS models to "no collection" rear discharge mowing.
- 9.5/10.0 Bushel Catcher, P/N 8500-2

$
(P/N 8500-2)

POWER DUMP (7.0/9.5/10.0)

- Convenient dumping from operator seat
- Available as factory-installed option for MC, MD, and MT tractors
- Kit P/N 7620-14 (MC)
  Kit P/N 8620-2 (MD/MT)

$
List Price (7620-14)

$
List Price (8620-2)

GHS BLOWER LOCKOUT

- Disengages GHS blower when using Side Discharge/Mulching decks or implements
- Usable on 10" and 10.5" blowers on MC, MD and MT
- Kit P/N 7541 (only usable with Micro-V blower belt and pulleys)

$
List Price

GHS & GROUND DRIVE OPTIONS

GHS EXHAUST SCREEN WITH LARGE HOLES

- Use in wet conditions to help prevent the GHS from clogging and to boost vacuum action
- Easily interchanges with standard screen
- P/N 7512-22 (7.0)
  P/N 7512-3 (10.0)

$ List Price (7512-22)

$ List Price (7512-3)

REMOVABLE BINS

- Two molded boxes split the weight of the larger bushel catchers when dumping
- Useful for single operator
- P/N #8510-2

Note: These bins will fit in the 10.0 catcher and can be used, but the taper of the 10.0 box design allows material to collect outside of the bins.



$ List Price (8510-2)

DUMP BAG

- Reusable, fabric bag fits over the back door opening.
- Can be used for 6.7, 7.0, 9.5 and 10.0 bushel catchers
- P/N 5598 (9.5)
  P/N 5598-1 (6.7/7.0)
  P/N 5598-2 (10.0)

$ List Price (5598)

$ List Price (5598-1)

$ List Price (5598-2)

MARKETING TOOLS

ITEM	P/N	DESCRIPTION
Banners	5898-1	Large Banner (4' x10')
	5898-2	Small Banner (2' x 5')
Signs	N/A	Dealership Lighted Signs
	5898	Metal Dealership Sign (15.5" x 33.5")
	5898-4	Lighted Dealer Sign (LED) - 13" x 32"
	6895-71	Dealer Line Sign (16" x 24")
Oversize	6895-65	Truck Window Screen - Large (70" x 20")
Graphics	6895-66	Truck Window Screen - Small (60" x 18")
& Decals	6895-46	Studio Image (GHS/RH) 48" x 35"
	6895-47	Studio Image (SD/LH) 48" x 35"
	6895-48	Action Image (SD/RH) 48" x 35"
	6895-49	Action Image (GHS/LH) 48" x 35"
	6895-50	Walker Mowers Logo
	6895-60	Dealer Window Applique
Displays	6895-10	Onboard Literature Rack
	6895-26	Pop-Up Dealer Display
Videos	6895-57	DVD Sales Video Package
	6897	DVD, Product Video
	6897-1	DVD, *out front Advantage* - Decks
	6895-64	DVD, Sales Video Package (Multi-Language)
	6895-63	DVD, Consumer Video
	6897-11	Walker TV HD Player
	6897-22	Walker TV SD Card, All Seasons
	6897-28	Walker TV SD Card, Non Collection
	6897-29	Walker TV SD Card, Advantage Productivity
Brochures	5895-31	Product Line Brochure
	6895-17	Accessories Catalog
	6895-61	Step-Up Brochure
	5895-8	Single Sheet Brochure
	6895-55	MB Brochure
	6895-28	MH Brochure
	6895-97	MC Brochure
	6895-98	MD Brochure
	6895-99	MT Brochure
	6895-37	E-Series Brochure (California)
	6895-52	Walker Difference Brochure
	6895-51	History Brochure
	6895-54	Hi-Dump™ Brochure
	6895-18	Mid-Mount Buyer's Guide
	6895-79	Why Choose EFI Brochure
	Flysheets for each model are available at walkerdealer.com	
Misc.	6895-27	How To Sell Guide
	5898-25	Counter Mat (GHS)
	5898-26	Counter Mat (MB)
	5898-27	Counter Mat (MH)
	5898-28	Walker Binder
	6895-68	Greeting Card, Small (Includes Envelope)
	6895-69	Greeting Card, Large (Includes Envelope)
	5898-18	*out front mowing* Logo Packing Tape
	5898-30	UPS/USPS Shipping Envelope (Letter Size)
	6895-70	Dealer Hang Tag
	5889	Walker Talk Magazine Holder
	5898-10	Show Flag Kit (5 piece)
	5898-22	Show Flag Rubber Indoor Base w/ Spindle
	6895-81	Canopy and Frame
	6895-84	Canopy Side Rails
	6895-86	Logo Table, Round (29.5)
	6895-67	Walker Logo Stool
	6895-76	Walker Logo Stool with Back
	6899-50	Calendar (USA)
	6899-51	Calendar (AUS/NZ)
	6899-25	Portfolio
	6999-80	(Annual) Salesman Product Guide
	5889-X	Walker Talk Magazine
	5999-X	Walker Dealer Newsletter

MARKETING TOOLS

Dealers have a number of excellent tools at their fingertips by just clicking on the Marketing tab at walkerdealer.com.

AdBuilder

- Advertise your dealership, available equipment and events using pre-made Showroom Price Sheets, Post Cards and Posters
- Customize for your dealership
- Available in a variety of sizes

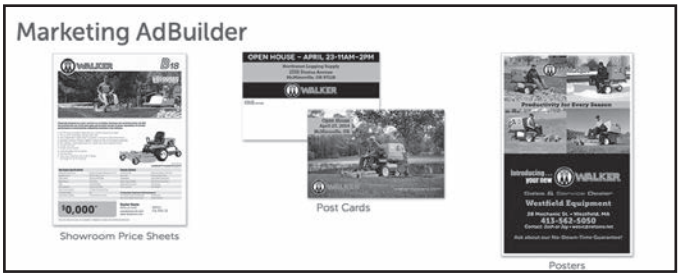

Toolbox

- See the full lineup of available promotional tools
- Include details and part numbers to make ordering easy

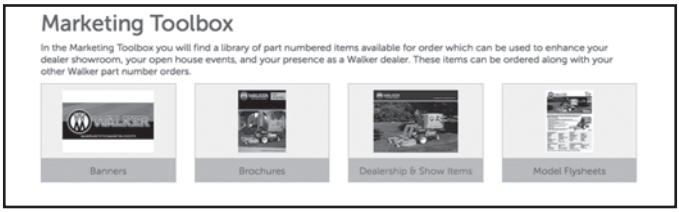

Assets

- Downloadable assets for advertising your dealership in a variety of media

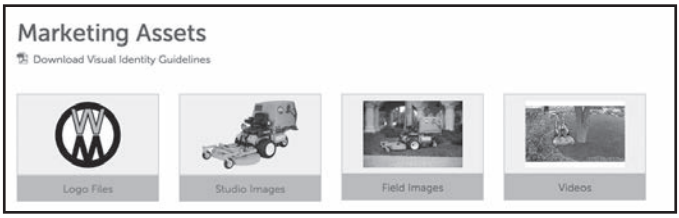

Co-op Claims

- Co-op pre-approval and reimbursement request available here
- Electronic transactions to streamline process
- You can also add your shows, events and open housed to walkermowers.com at this location
- Electronic filing cabinet for future (repetitive) use

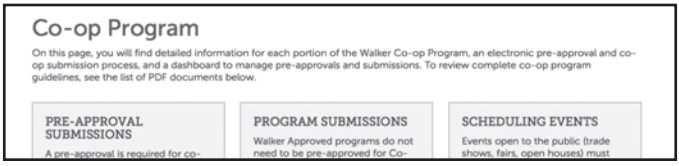

MARKETING TOOLS

walkermowers.com

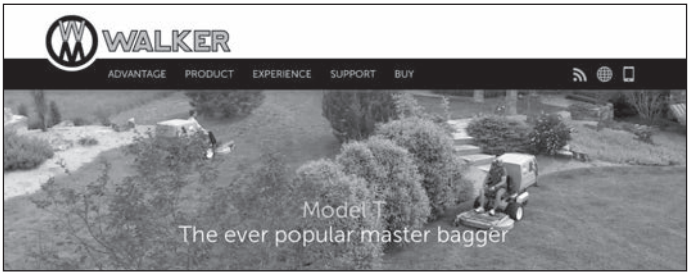

Walker's best sales tool and lead generator gives a thorough presentation of the product and company. Anyone who talks with customers about Walker Mowers should spend time at this site to learn more about the product and be able to communicate with customers who have learned about Walker through this site.

thewalkeradvantage.com

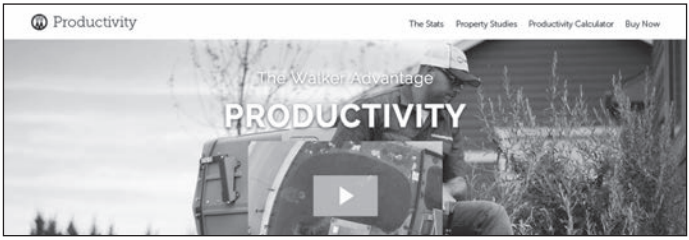

We've spent three years testing 25 different mowers (both Walker and competitor's product) on four real world properties. We've collected the data and placed it on our new thewalkeradvantage.com site. There is a Productivity Calculator that allows end customers to see how much more productive they can be by switching from their brand of mower to a comparable Walker Mower. This is a great tool to show and share why and how the Walker Mower is more productive.

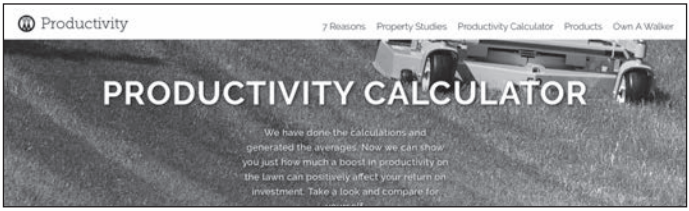

Social Media

facebook.com/walkermowers instagram.com/walkermowers twitter.com/walkermowers

In recent years, Walker Mowers has gained substantial popularity on a variety of social media outlets. Many dealers have not only started following Walker at these sites, but they have also created their own pages and developed their own unique activities and followings. Get familiar with these easy to use, cost-effective advertising/customer relations tools.

WALKER WARE

WALKER WARE

Walker Ware has teamed with Walker Manufacturing to provide distributors and dealers with top-quality clothing and collectables at great pricing. Our 2016 line has exciting new items, and our website makes ordering easy!

Custom Dealer T-Shirts
With your company name as low as $3.50 Each

Cap and Tee Combo Program
Low cost giveaways--as low as $7.50
(Available with a grey cap)

Build brand-awareness with Walker Ware!

WALKER WARE
Gear for Walker Mowers Enthusiasts

walkerware.com

FUEL CONSUMPTION

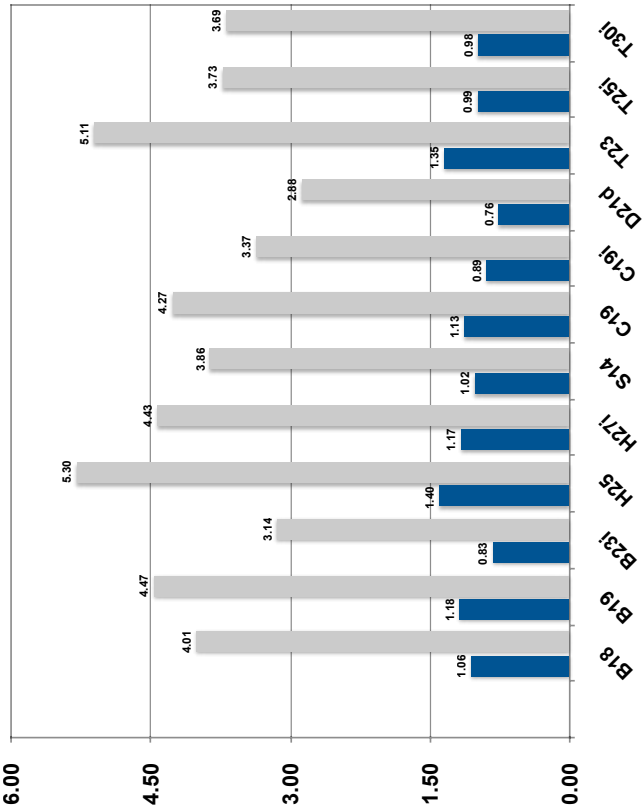

Gallon/Hour
Liter/Hour

Note: Each machine was operated at wide open throttle, factory setting for maximum engine RPM. A 48" SD deck (60" for MBS) was installed with paddle blades to simulate typical mowing load, fuel consumption was measured over a 30-minute run time using fuel weight.

WALKER MANUFACTURING CO.
5925 E. HARMONY ROAD
FORT COLLINS, CO 80528
800.279.8537

Effective: 10/15

Walker Manufacturing Company reserves the right to make changes to models, specifications and descriptions without notice.

Copyright © 2015 Printed In USA P/N 6999-80