




PAR-ALLTIRA2808 2 Megapixel TVI/AHD/CVI/Analog, Turret Camera, 2.8-8mm, 50' IR Range, 12VDC

Features

- All-in-One Technology (TVI/AHD/CVI/Analog 960h)
- Motorized Auto-Focus 2.8-8mm Lens
- True Day/Night
- D-WDR
- 50' IR Range
- Up The Cable (UTC) Function
- IP65 Weather Resistant
If using outside, it is recommended to use under an awning for additional protection
- 3D DNR (Digital Noise Reduction)
- 12VDC Only Operation
- Through InVid Tech DVR:
Free App, CMS & MAC Client

Model	PAR-ALLTIRA2808
IP Rating	IP65 (Recommended Indoor Use)
Filter	Removable IR Cut Filter
Image Sensor	1/2.9"2.1Mega-pixel Sony CMOS
Pixels	1920(H)*1080(V)
Horizontal Resolution	1080P
Minimum Lux	0Lux(18 PCs SMD LED ON)
Vertical Frequency	NTSC:60Hz PAL:50Hz
Scanning System	Progressive
S/N Ratio	≥52dB
Electronic Shutter	NTSC:1/60-1/100,000S PAL:1/50-1/100,000S
Lens	2.8-8mm Motorized Varifocal IR Lens
White Balance	ATW
OSD	YES
BackLight Compensation	AUTO
AUTO Gain Control	ON
Defog	OFF/ON
DNR	OFF/ON
DWDR	OFF/ON
Day&Night	AUTO/Color/BW/Ext
Available IR Distance	15M (50ft)
Gamma	0.45
Video Output	HD-TVI (AHD / CVI / CVBS)
Power Supply	DC12V±10%
Current consumption	480mA (MAX)
Dimension	Φ93×75mm (3.66"×2.95")
Weight	330g (27.86oz)
Storage Temperature	-22° - 140°F (-30° - 60°C)
Operating Temperature	-22° - 104°F (-30 - 40°C)

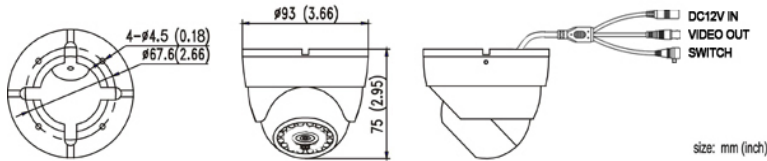

Ordering Information

PAR-ALLTIRA2808: 2 Megapixel Turret, 2.8-8mm

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.