




TMM4215/470 PinStamp® Systems PINSTAMP® Multiple Pin Marking System

The innovative **PINSTAMP®** dual-pin TMM4215 provides a 4" x 0.5" (100mm x 13mm) marking window, twice as large as that of the TMM4200. This lightweight, compact marker is available in both fixtured and hand-held configurations.



Shown with optional debris shield

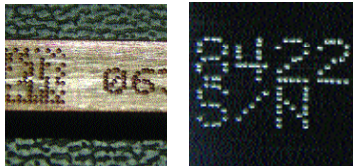

FEATURES

- Compact, ergonomic design
- Weighs 4.5 pounds (2.0kg)
- Marks up to four 0.125" (3mm) high characters-per-second
- Available with the high-speed 25S marking pin or the deep marking 150SA pin
- Marking depths up to 0.013" (0.33mm) in mild steel
- Rugged rack and pinion X/Y platform for low maintenance operation
- Also available without handle and standoff for fixtured applications
- Detachable electronics cable for improved serviceability
- Self-contained, state-of-the-art TMC470 controller features two serial ports, USB and Ethernet ports
- Automatically generates serial number, time, date and shift codes
- Stores up to 400 marking patterns
- Easily interfaced to PLC's (Programmable Logic Controllers) and host computers

OPTIONAL ACCESSORIES

- Panel-mount and IP/NEMA rated controller options
- Cable balancer attachment kit
- Marking head standoff V-Block Kit for marking on the circumference of cylindrical parts
- Quick-disconnect tool post
- Bar code scanner for automatic data entry
- Logo-Font Design Software package for design of custom fonts or logos
- PC-based upgrade utility available FREE from www.telesis.com for easy software upgrade
- PC-based Pattern (marking file) Back-up utility available FREE from www.telesis.com

Compact Self-Contained
TMC470 Controller — no
PC required.



QR Code Web Page Product Link

DATA MATRIX™ 2-D Code Marking Capability
Meets all Department of Defense UID Requirements
and other industry standards