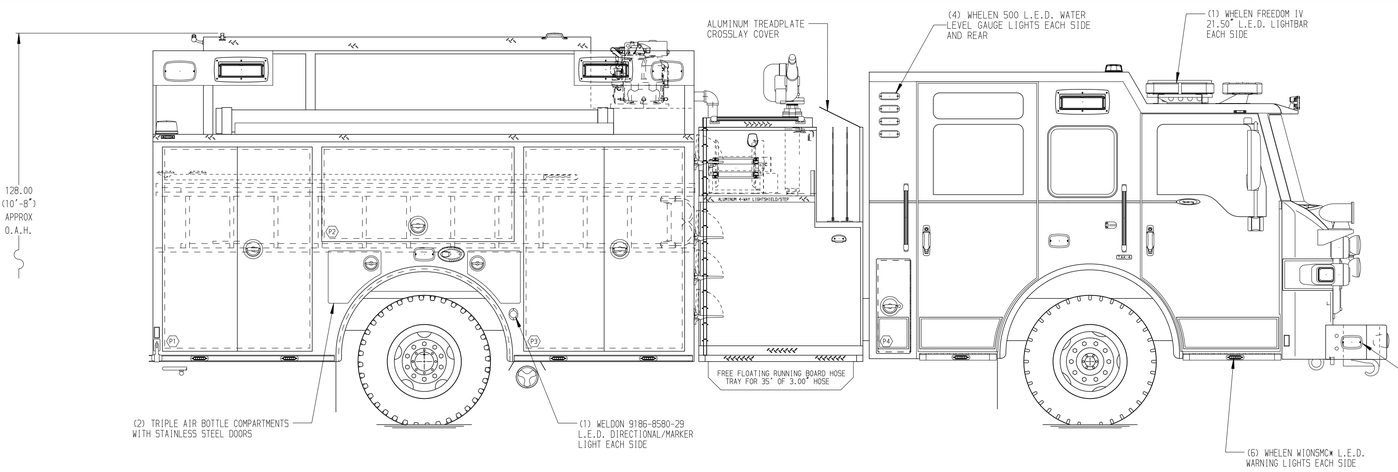

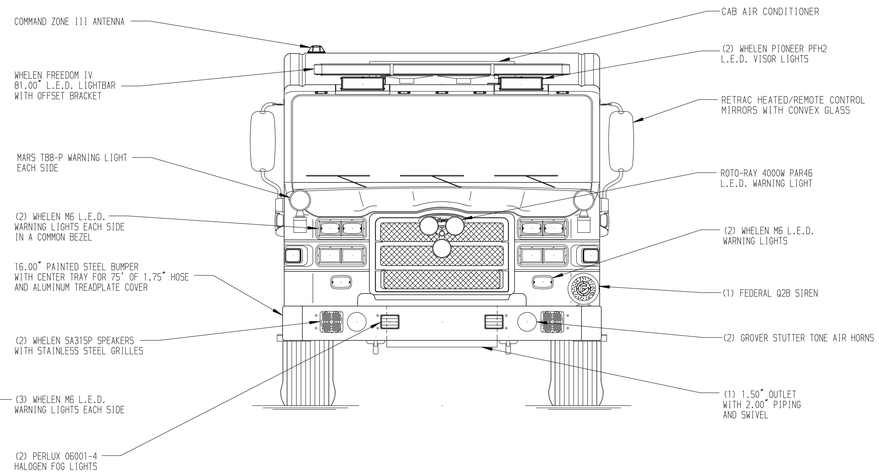

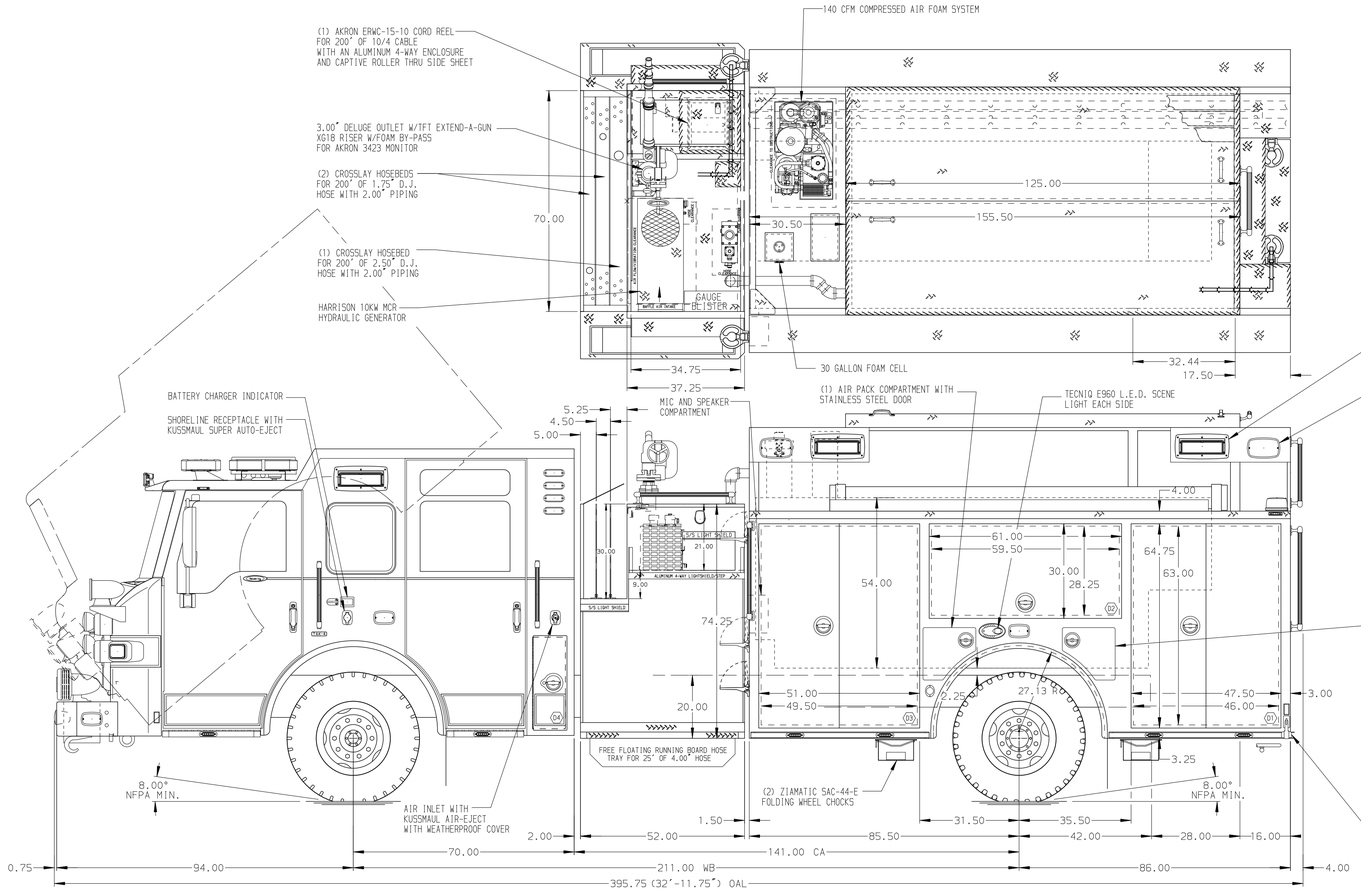

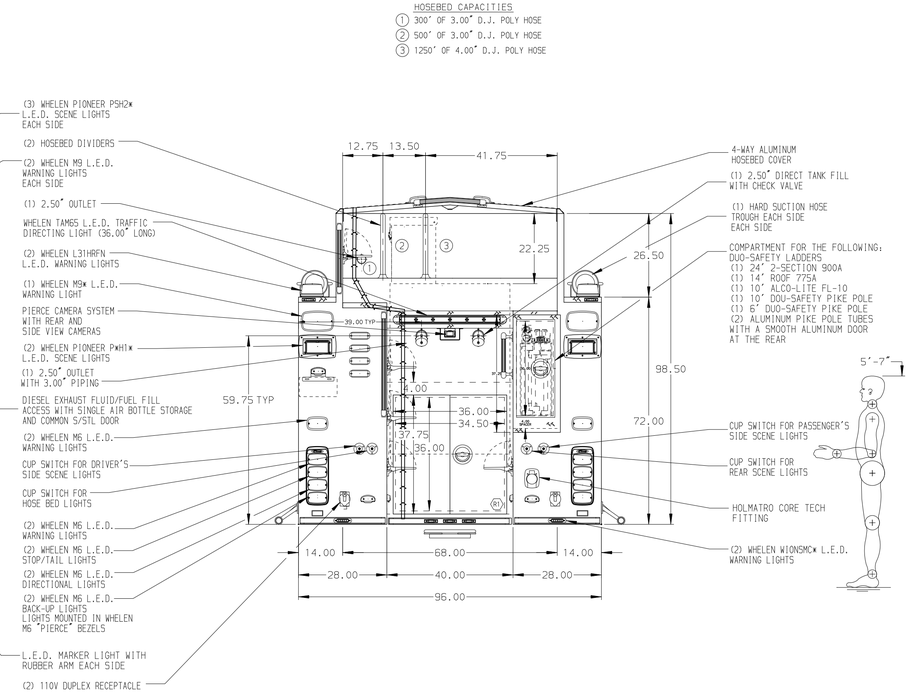

HOSEBED CAPACITIES
1. 300' OF 3.00" D.J. POLY HOSE
2. 500' OF 3.00" D.J. POLY HOSE
3. 1250' OF 4.00" D.J. POLY HOSE

STAINLESS STEEL BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. BATTERY CHARGER LOCATED IN COMPARTMENT D3
3. SUB FEED BREAKER BOX IN COMPARTMENT D3
4. ONE FIXED FULL WIDTH/DEPTH SHELF IN COMPARTMENT D1
5. ONE ADJUSTABLE FULL WIDTH/DEPTH SHELF LOCATED IN COMPARTMENTS D2,P1,P3,TWO IN D1
6. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENT D2
7. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS P1,R1
8. TWO SLIDE-OUT TOOL BOARDS WITH PEGBOARD PATTERN IN COMPARTMENT D1
9. ALUMINUM PEGBOARD WITH TRACKS ON THE REAR WALL OF COMPARTMENTS D1,D2,D3,P1,P2,P3
10. ALUMINUM PEGBOARD WITH TRACKS ON THE SIDE WALLS OF COMPARTMENTS D1,P1,P3
11. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
12. MOUNTING PROVISIONS FOR FUTURE HYDRAULIC REEL INSTALLATION LOCATED IN COMPARTMENT R1
13. AIR OUTLET WITH SHUT OFF VALVE ON D.S. PUMP PANEL

REV	DATE	BY	CH		
▽	10APR18	JWO	CDU	CHASSIS DATA	
				MAKE	PIERCE
				MODEL	VELOCITY

Pierce MANUFACTURING INC.

JOB NO.	32304		
SCALE	1:24	DATE	
TITLE	1500-D-1000P W/30G FOAM,171,FULL HEIGHT & DEPTH D.S. FDLER P.S.,(3) X-LAYS,DELUGE,GENERATOR,CABLE REEL	DRAWN BY	JWO
			27MAR18
FOR	CHESTNUT RIDGE VFC OWINGS MILLS, MARYLAND	CHECKED BY	CDU
			30MAR18
DWG NO.	32304AD	SHEET SIZE	D
		SHEET NO.	1 OF 1

View File Created 10-APR-2018 09:34:39