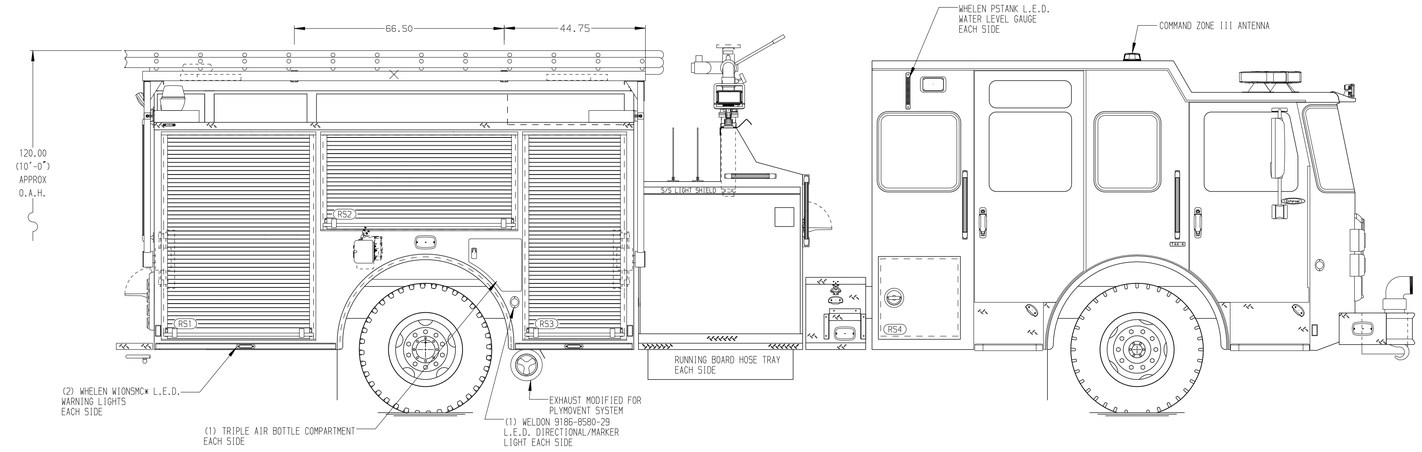

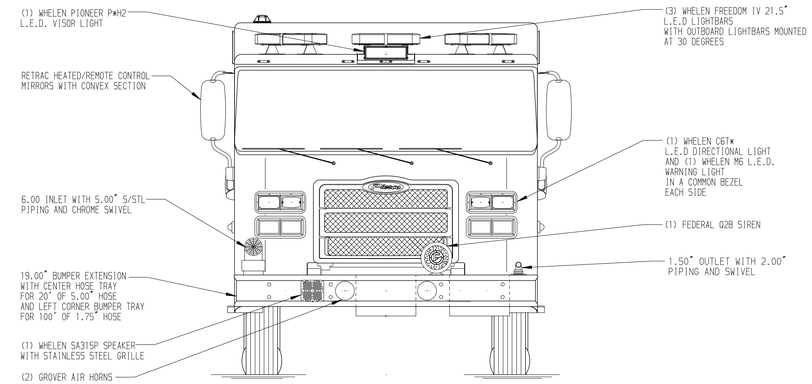

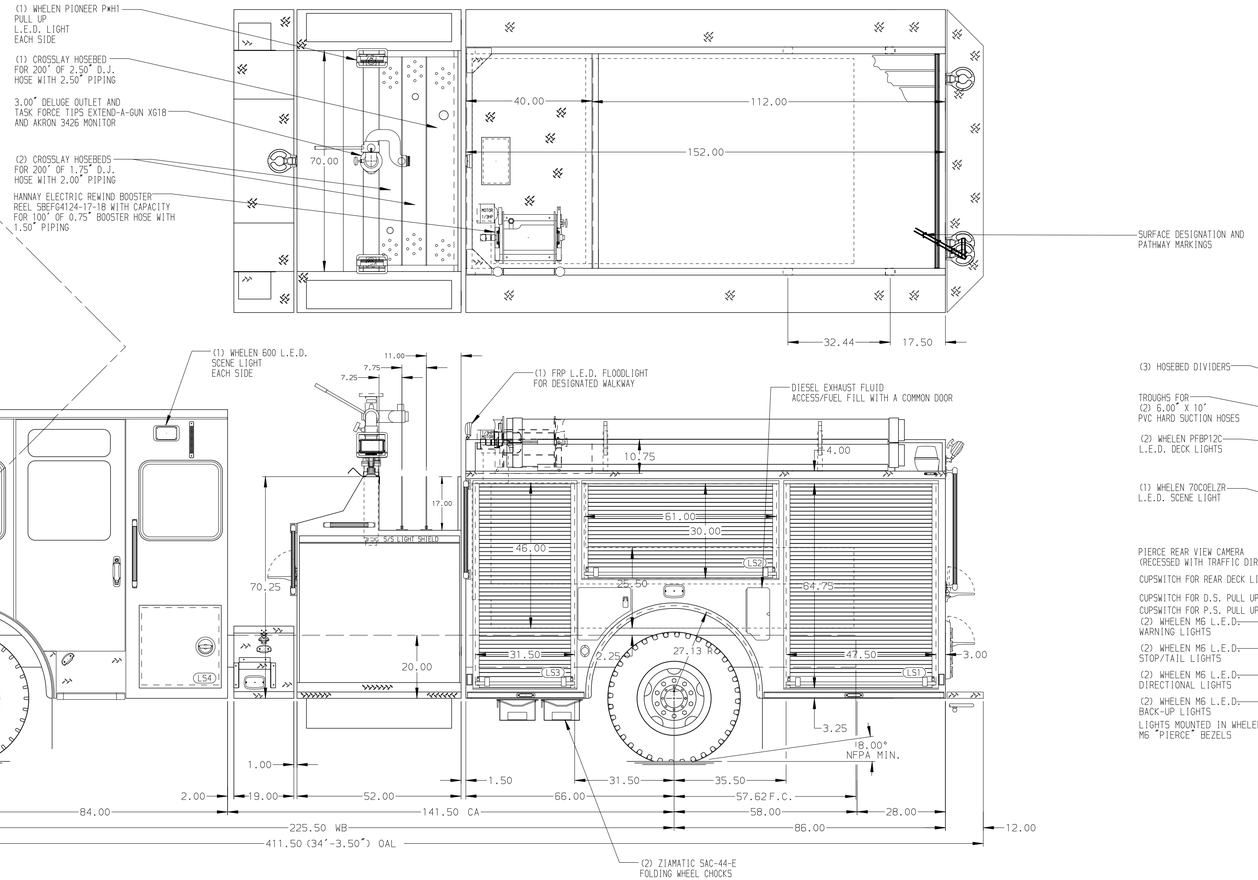

HOSEBED CAPACITIES

1. 1000' OF 5.00" HOSE
2. 600' OF 3.00" HOSE
3. 300' OF 2.50" HOSE
4. 250' OF 2.50" HOSE WITH 200' OF 1.75" HOSE ON TOP

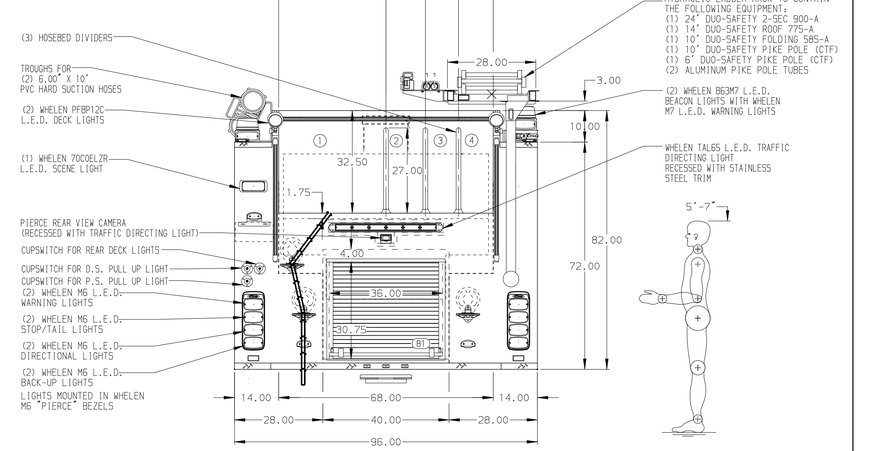

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN LS3
2. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. DRIP PAN GUARD FOR ROLL-UP DOOR IN LS1, LS2, LS3, B1, RS1, RS2, AND RS3
4. FULL WIDTH/DEPTH ADJUSTABLE SHELVES TWO IN LS3 AND ONE IN LS1, RS1, AND RS3
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN LS1, LS3, B1, RS1, AND RS3
6. SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN LS2
7. PARTITION BETWEEN LS1/B1 AND RS1/B1

REV	DATE	BY	CH
06MAY19	LST	CSH	
17APR19	LST	CSH	

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER
DWG NO.: 33570AD

TITLE: 1500-D-750 GAL POLY, 152" FH FDLER
HYDRAULIC LADDER RACK, (3) CROSSLAYS, DELUGE
FOR: WEST SAYVILLE OAKDALE FIRE DISTRICT
WEST SAYVILLE, NEW YORK

PIERCE MANUFACTURING INC.

JOB NO.	33570 01-02
SCALE	1:24
DATE	
DRAWN BY	LST
DATE	07FEB19
CHECKED BY	AZA
DATE	21FEB20
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 07-MAY-2019 06:10:01