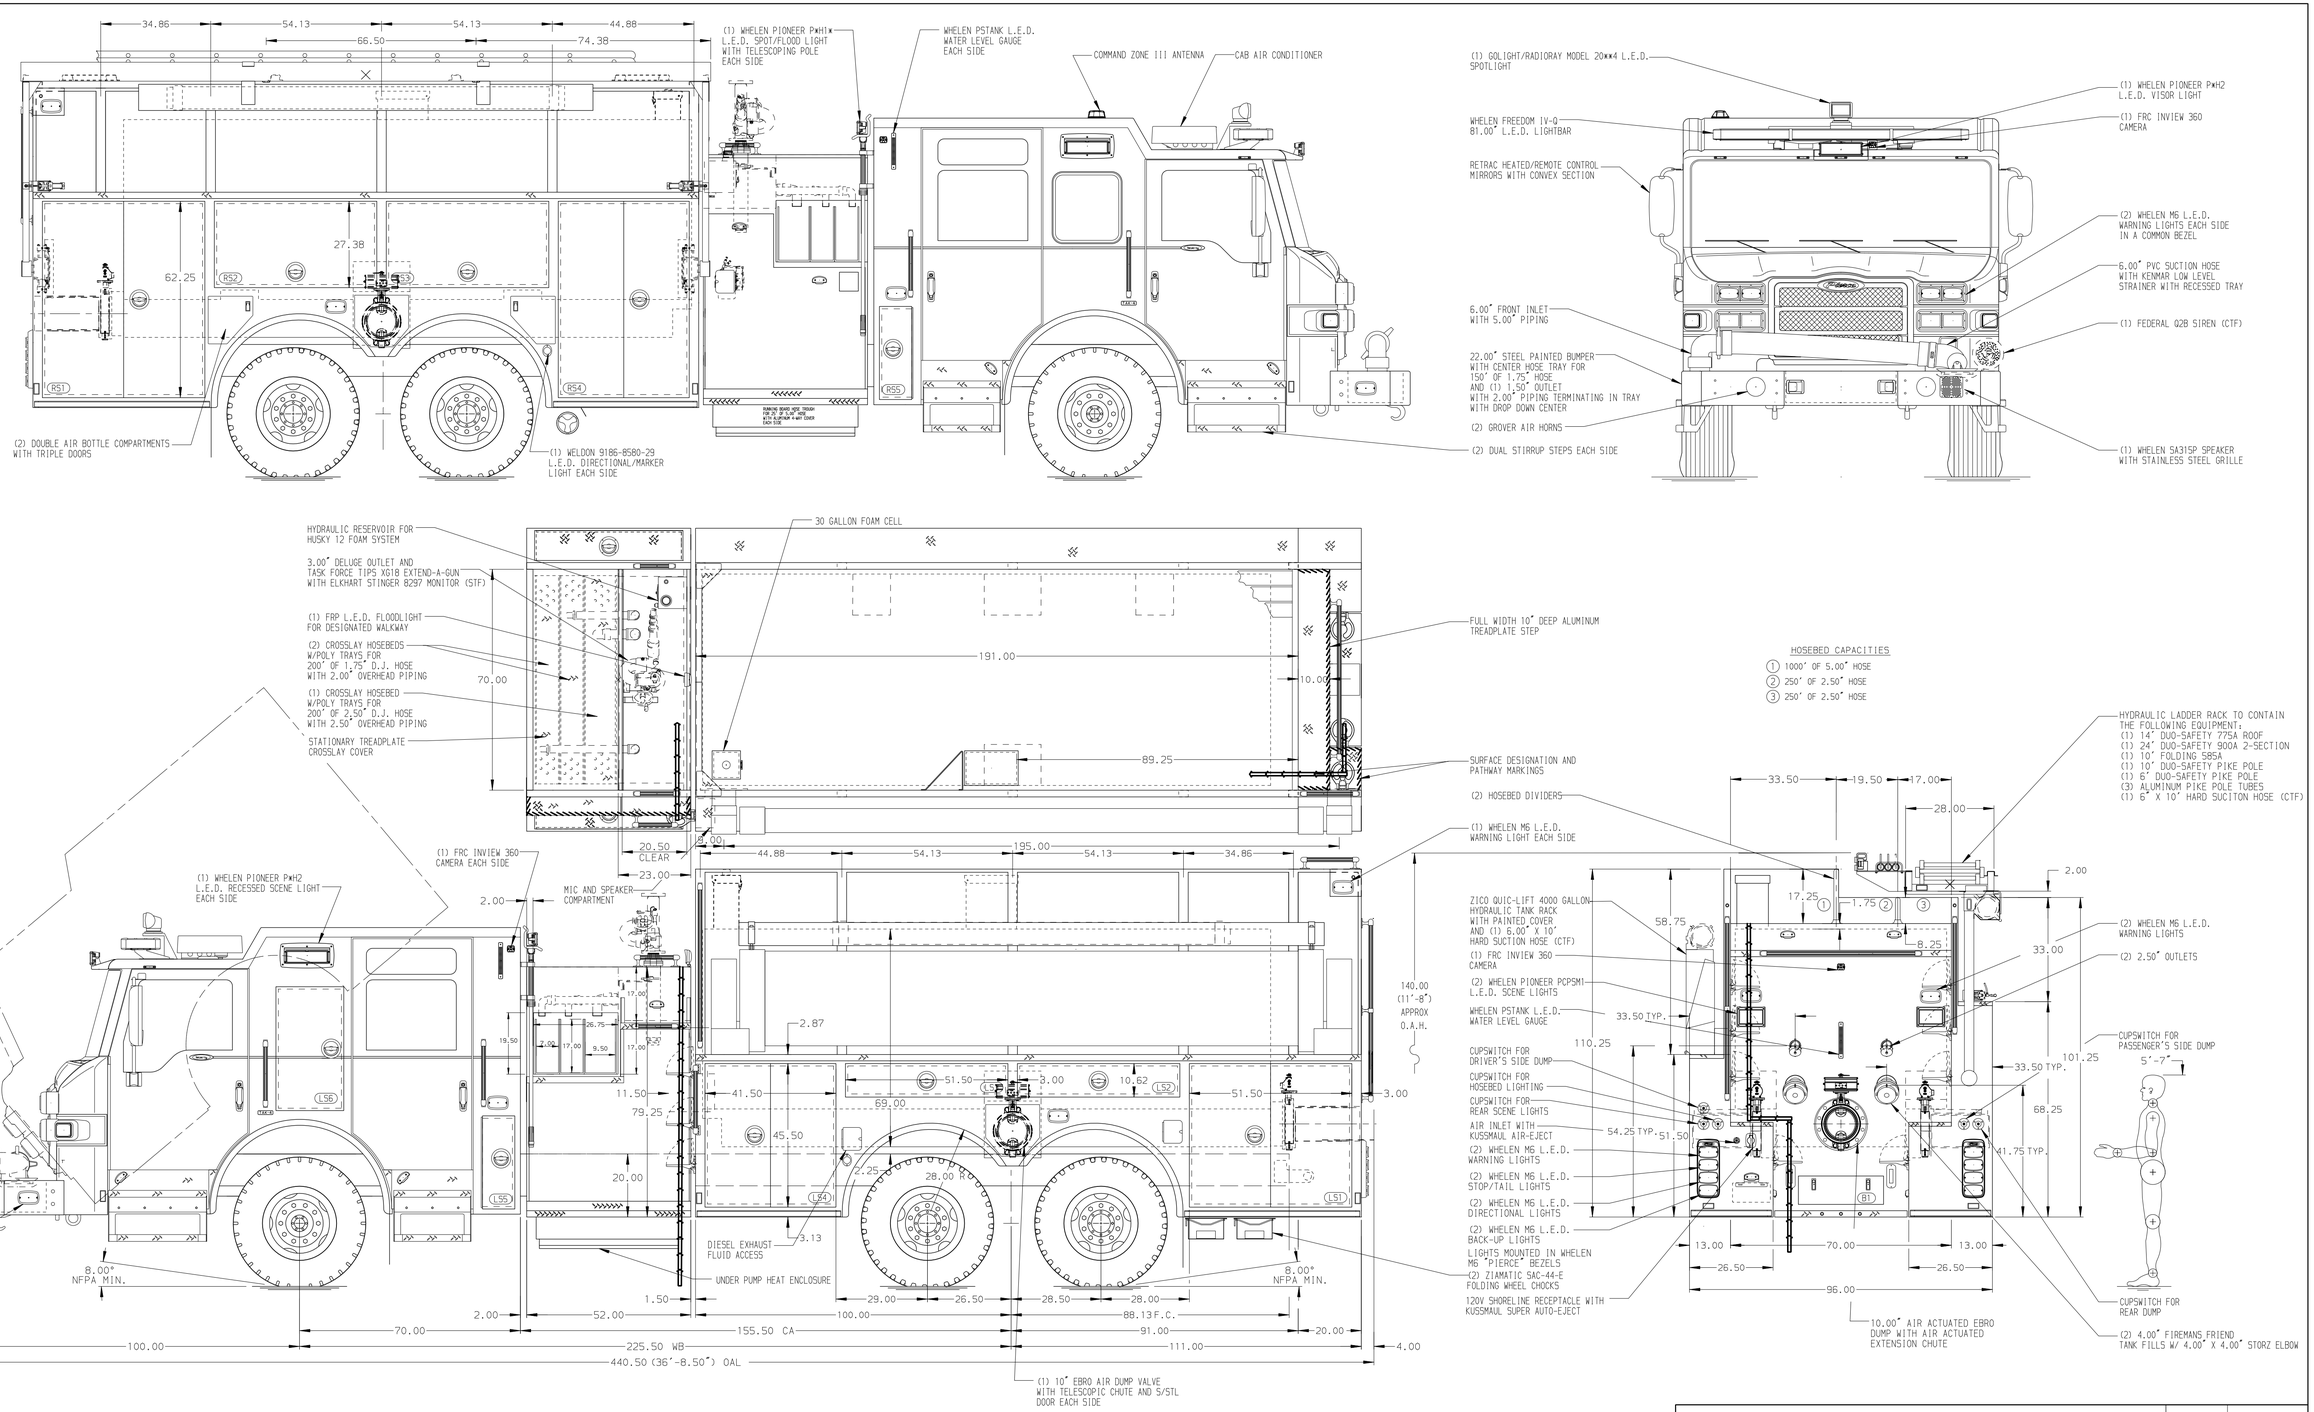

ALUMINUM BODY

Pierce MANUFACTURING INC.

JOB NO.	33866
SCALE	1:24
DATE	
DRAWN BY	LST 03MAY19
CHECKED BY	AZA 09MAY19
SHEET SIZE	D
SHEET NO.	1 OF 1

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN LS4
2. BATTERY CHARGER INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN LS1, LS4, RS1, AND RS4
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN LS1, RS1, AND RS4
6. TWO SLIDE-OUT TOOL BOARDS WITH PEGBOARD PATTERN IN LS4
7. HONDA EU2000I GENERATOR (SIF) LOCATED 2
8. ONE 120V 7-PLACE RECEPTACLE STRIP BEHIND THE DRIVER'S SEAT, BEHIND THE OFFICER'S SEAT, AND IN THE LEFT SIDE EMS CABINET

REV	DATE	BY	CH		
7	140CT19	LST	MSA	CHASSIS DATA	
6	18SEP19	LST	MSA		
5	29AUG19	LST	MSA	MAKE	PIERCE
4	02AUG19	LST	MSA		
3	13JUN19	KLE	KWI	MODEL	VELOCITY

TITLE: 1500-D-2980P, 2950 GAL OF WATER W/ 30 GAL FOAM CELL 211" TANKER, HYDRAULIC LADDER RACK, (3) CROSSLAYS

FOR: TOWN OF ELLINGTON FIRE DEPARTMENT ELLINGTON, WISCONSIN

DWG NO. 33866AD

View File Created 14-OCT-2019 10:01:29