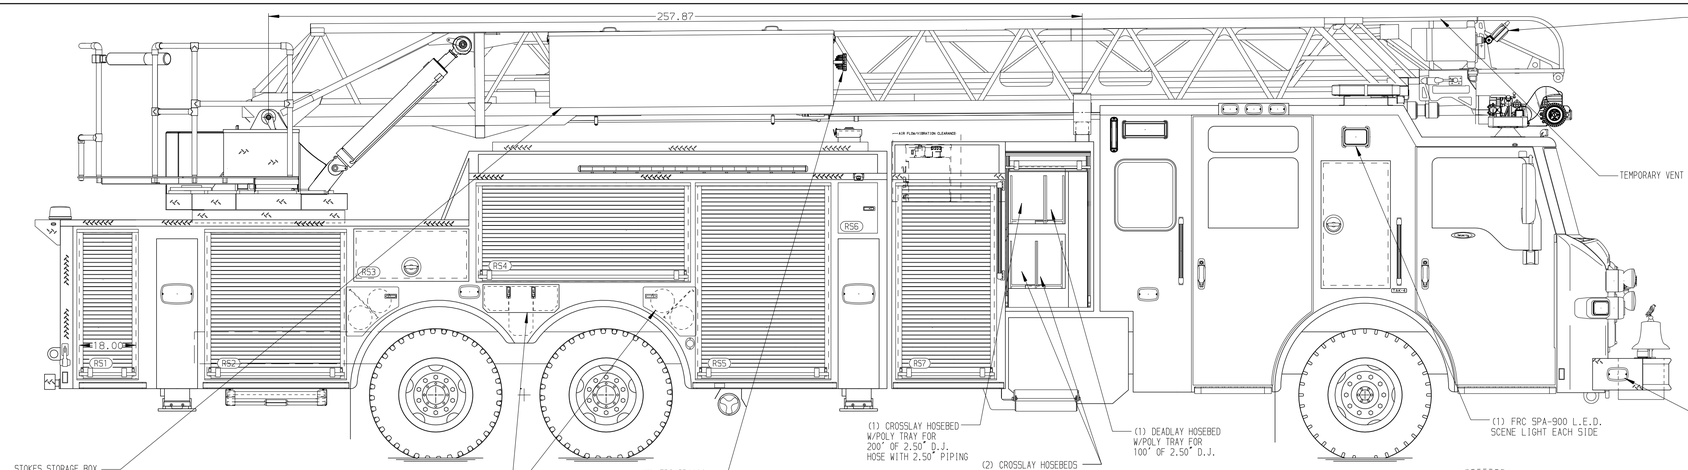

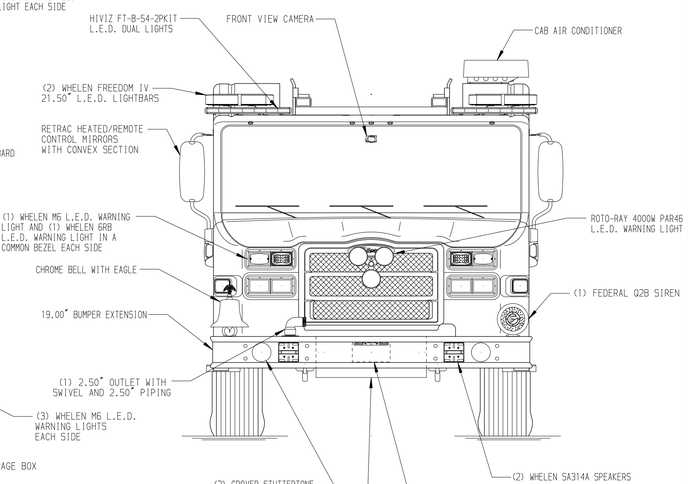

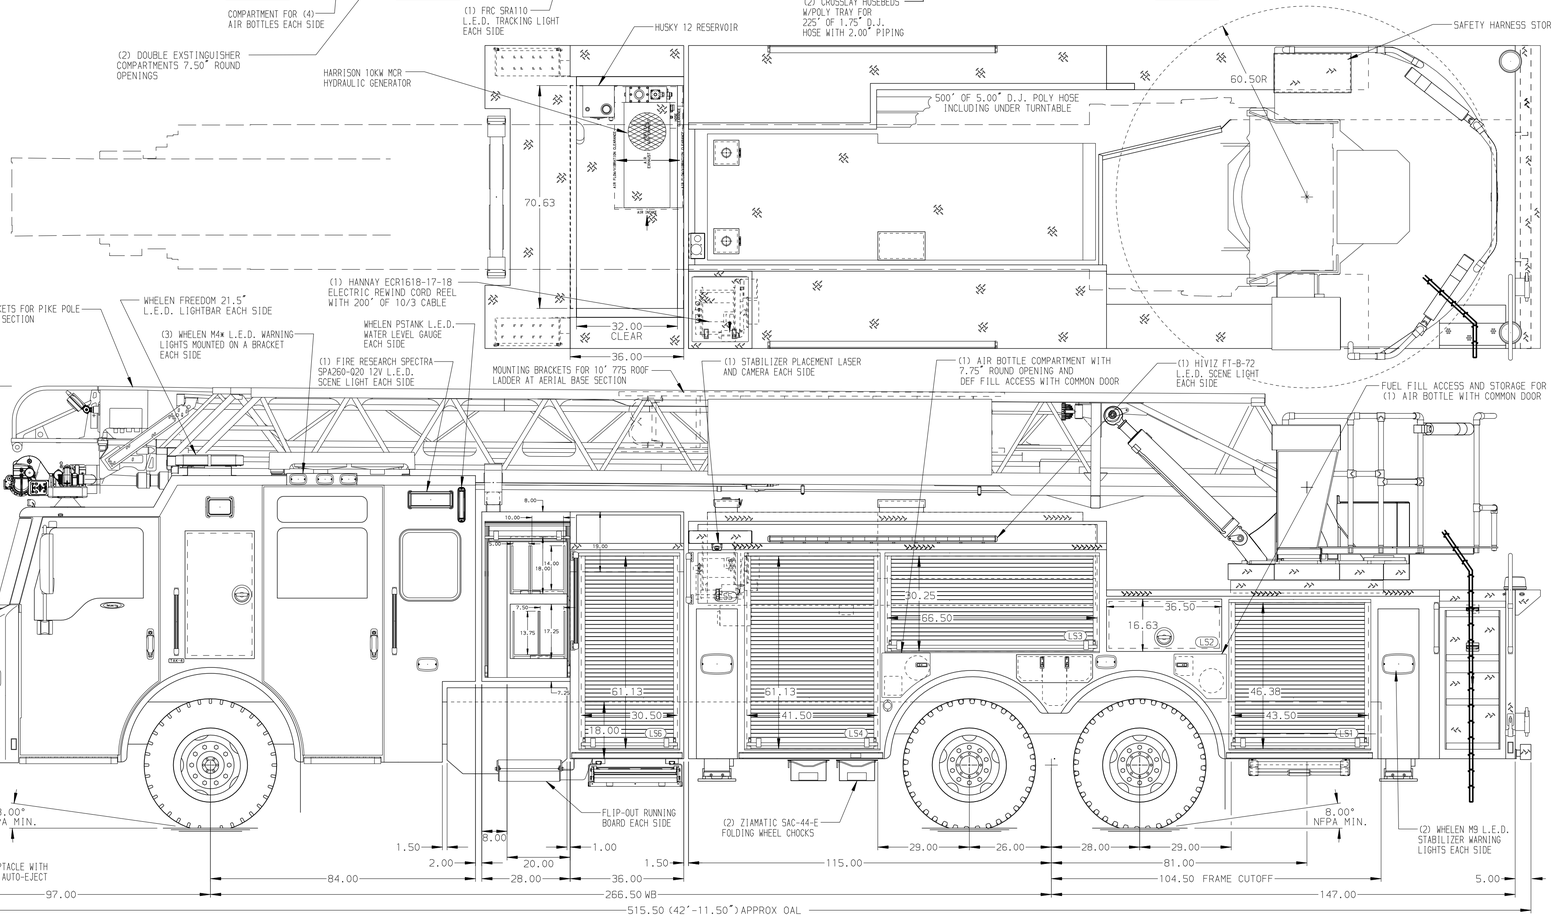

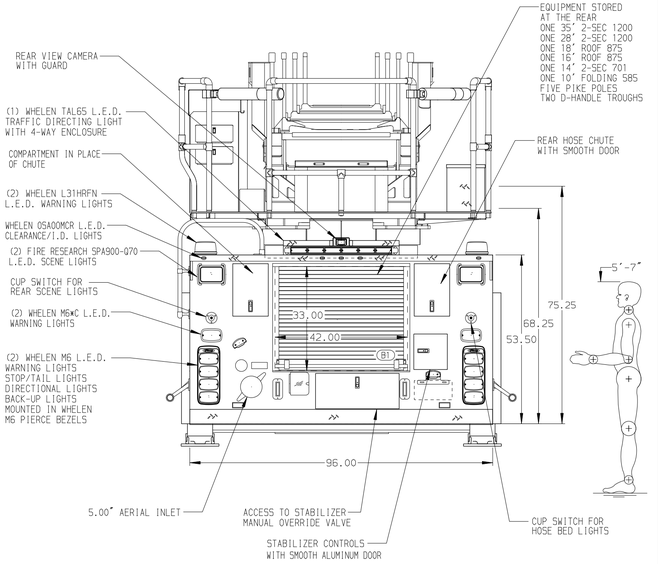

ALUMINUM BODY

SIDE ROLL & FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. OSHKOSH TAK-4 T3 REAR STEER
2. L.E.D. LIGHTING ON AERIAL LADDER SECTIONS
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE PUMP PANEL
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER SEAT RISER WITH BRACKET
6. SIX ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. SEVEN FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENTS PER SHOP ORDER
8. 3.00" RAISED AERIAL PEDESTAL
9. 1500 GPM HIGH FLOW WATERWAY
10. ONE HORIZONTAL PARTITION IN COMPARTMENT PER SHOP ORDER
11. TWO ALUMINUM PEGBOARDS WITH TRACKS ON THE BACK WALL OF COMPARTMENTS PER SHOP ORDER
12. LIFTING EYE ROPE RESCUE ATTACHMENT AT AERIAL TIP
13. CIRCUIT BREAKER PANEL IN COMPARTMENTS AUTCP
14. 2-WAY INTERCOM SYSTEM BETWEEN AERIAL TIP AND TURNTABLE
15. TRIDENT FOLDING STEPS ON AERIAL DEVICE
16. STABILIZERS MODIFIED FOR 18" GROUND PENETRATION
17. CTECH DRAWER ASSEMBLY IN COMPARTMENT PER SHOP ORDER
18. 120V POWER TO AERIAL TIP
19. CIRCUIT BREAKER PANEL IN COMPARTMENT PER SHOP ORDER
20. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
21. ONE ADJUSTABLE TILT/SLIDE-OUT TRAYS IN COMPARTMENT PER SHOP ORDER
22. POLYETHYLENE FOAM ON BOTTOM OF DRAWERS PER SHOP ORDER
23. FOUR TOOLBOARDS ADDED TO SLIDE-OUT TRAYS IN COMPARTMENET PER SHOP ORDER
24. ONE SWING-OUT TOOLBOARD IN COMPARTMENT PER SHOP ORDER
25. LITTLE GIANT LADDER MODEL 17 LOCATED IN COMPARTMENT PER SHOP ORDER
26. CAMERA AT TIP

REV	DATE	BY	CH
V	16AUG19	SVA	DTS
V	19JUL19	SVA	DTS
V	23MAY19	SVA	NDA

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY

Pierce MANUFACTURING INC.

TITLE: 107' ASCENDANT AERIAL LADDER AND BODY ASSEMBLY
520 GALLON WATERTANK-460 WATER/60 FOAM
FOR: WILLIAMSON COUNTY ESD #3 HUTTO FIRE DEPARTMENT
HUTTO, TX

DWG NO. 33999AD-SH1

JOB NO.	33999
SCALE	1:24
DATE	
DRAWN BY	SVA
	13MAY19
CHECKED BY	NDA
	20MAY19
SHEET SIZE	D
SHEET NO.	1 OF 2

View File Created 19-AUG-2019 13:51:38