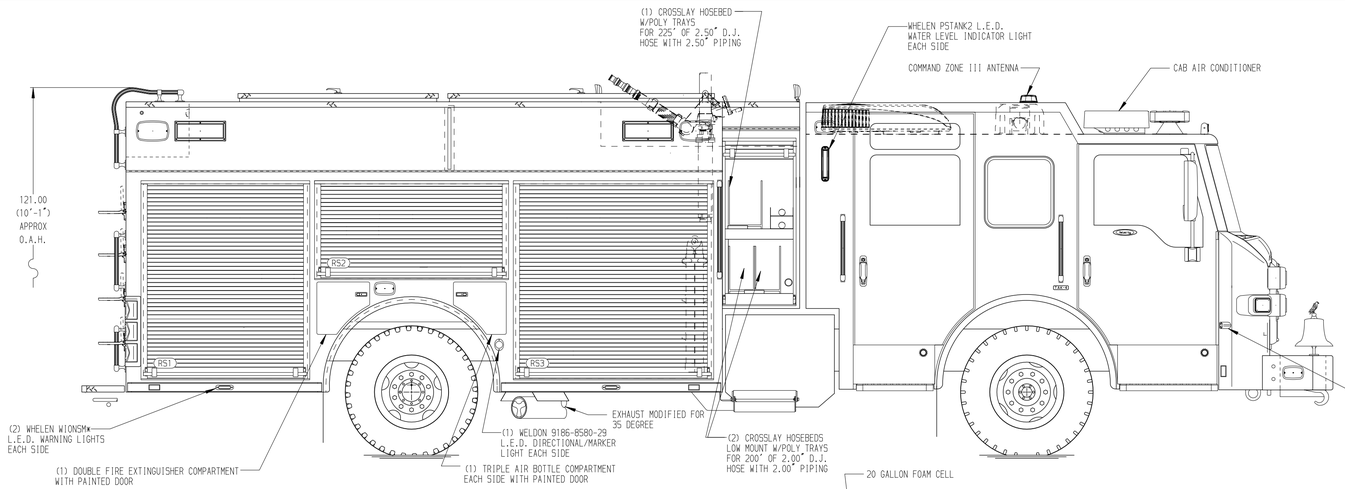

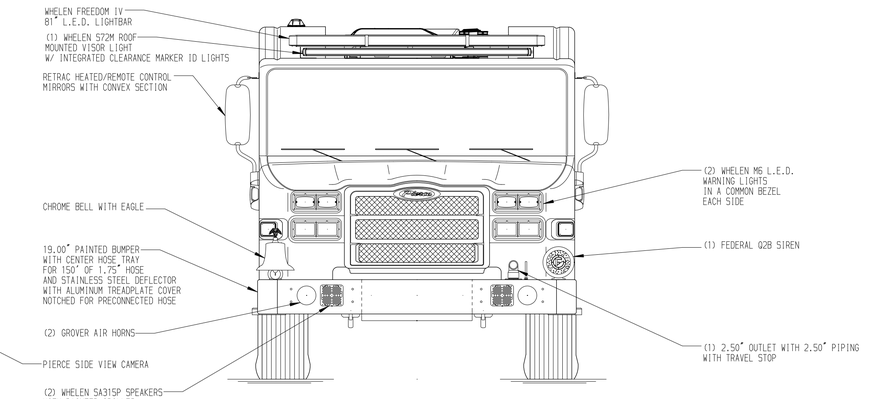

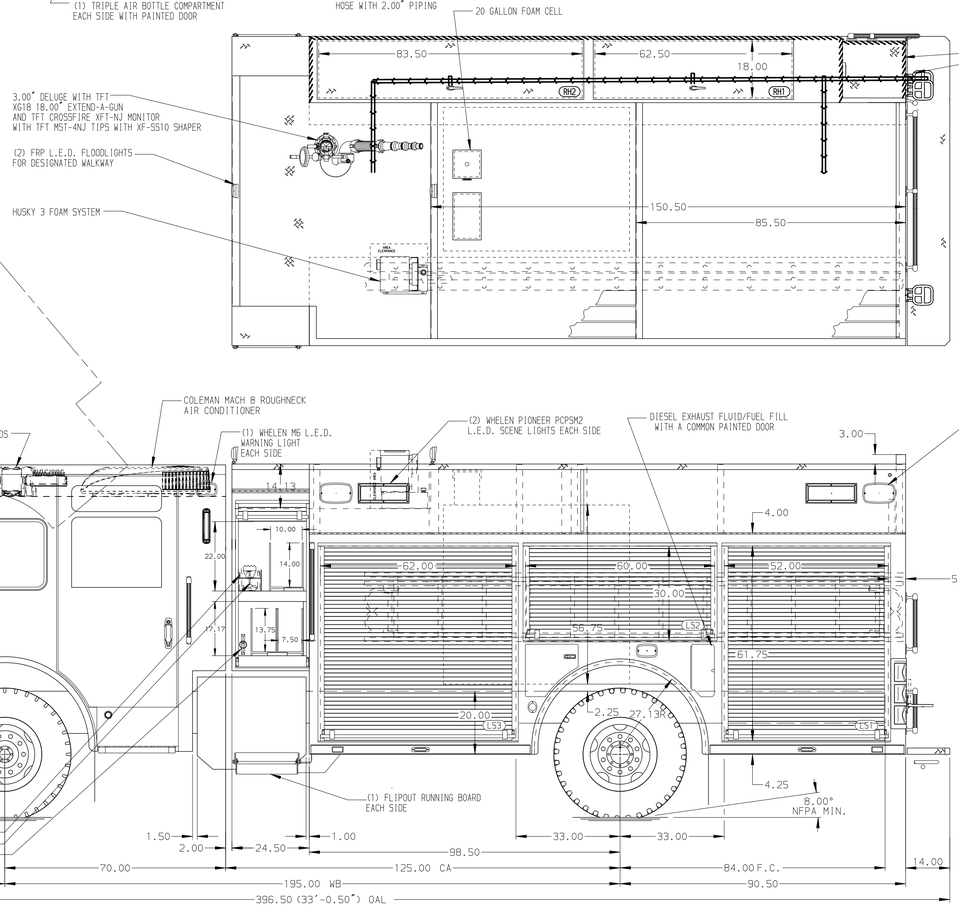

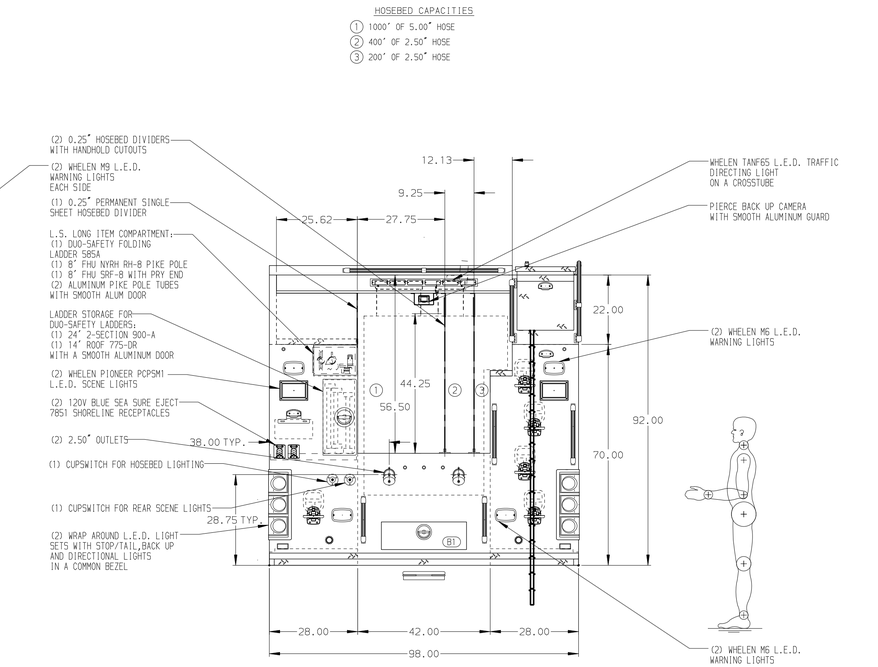

HOSEBED CAPACITIES
1. 1000' OF 5.00" HOSE
2. 400' OF 2.50" HOSE
3. 200' OF 2.50" HOSE

ALUMINUM BODY

FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET/OUTLET WITH DISCONNECT FITTING ON D.S. PUMP PANEL
2. BATTERY CHARGER LOCATED IN PUMP PLUMBING AREA
3. BATTERY CHARGER INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
4. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
5. ELASTIC PULL STRAP FOR DOORS ON BOTH CROSSLAY DOORS
6. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN LS1 AND LS3
7. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN LS1, RS1, AND RS3
8. ONE SWING-OUT ALUMINUM TOOL BOARD IN LS2 AND RS2
9. 4-DRAWER CTECH DRAWER ASSEMBLY IN RS3
10. 100# OIL DRY HOPPER LOCATED IN RS3
11. LITTLE GIANT MODEL 13 VELOCITY STORAGE IN RS3
12. 120V NEMA DUPLEX RECEPTACLE IN EACH EMS COMPARTMENT, LS1 AND RS1
13. WHEEL CHOCKS AND BRACKETS (DTF)
14. ONE ADJUSTABLE SLIDE-OUT TRAY IN LS3 AND RS1
15. TWO VERTICAL PARTITIONS IN RS3

REV	DATE	BY	CH
F	24FEB20	LST	CWI
D	17DEC19	LST	CWI
C	22NOV19	LST	CWI
B	15NOV19	LST	CWI
A	07OCT19	LST	CWI

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY

Pierce MANUFACTURING INC.

TITLE: 1500-D-500P, 480 GAL OF WATER W/ 20 GAL FOAM CELL
189" PUC RESCUE, LADDERS THRU BODY, (3) CROSSLAYS

FOR: CELINA FIRE DEPARTMENT
CELINA, TEXAS

DWG NO. 34040AD

JOB NO.	34040
SCALE	DATE
1:24	
DRAWN BY	10JUN19
LST	
CHECKED BY	12JUN19
CDU	
SHEET SIZE	SHEET NO.
D	1 OF 1

View File Created 25-FEB-2020 07:33:59