FD 8100 SERIES ALUMINUM SLIDING GLASS DOORS

STRENGTH & EASE-OF-USE IN ONE!

FEATURES & BENEFITS:

- Added Security: 2-point locking system
- Enhanced water shedding: Weep holes in track
- **Smooth Operation**: Stainless steel dual tandem rollers with precision ground bearings

STANDARD ITEMS:

- Dual Mortise Lock w/anti-slam device
- Adjustable dual cams on lock
- Anodized Track Pan w/snap-on cover
- Snap-on jamb covers
- 4 inch stile and bottom rail


EXTRA ITEMS:

- Secondary Mortise Lock Standard (4 point locking)
- 8" Bottom rail available
- Colonial muntins
- Anodized track cap (only available with O panels)
- Available in 90 degree or 135 degree configurations
- Configurations: 1 panel to 8 panels with or without pockets

SPECIFICATIONS:		
Glass Thickness	¼" tempered, ½" impact, 1" insulated, 1 ⅓₁6" insulated impact	
Maximum Size	32' x 10' (4' wide panels) 20' x 9' (5' wide panels)	
Muntin	Flat, GBG and SDL available	
Grid Options	Colonial, Prairie, Perimeter	
Product Rating	Up to +100/-110 PSF	
Frame Colors	White, Bronze	
Approvals/Certifications	HVHZ, NRFC, Florida Product Approval	





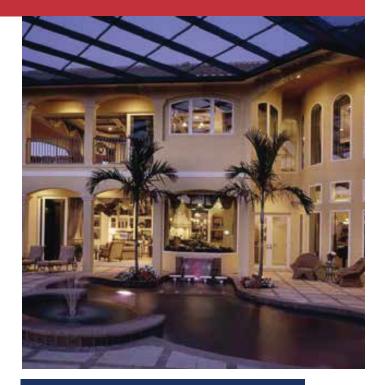

FRAME / TRACK SIZES:			
	Head	Jamb	Sill
2D2T w/screen	6 3/8"	6 1/4"	7 ½16"
2D2T no screen	5 3/16"	5 ½16"	5 ¹³ / ₁₆ "
2D2T retro	5 3/16"	5 1/16"	5 3/16"
3D3T w/screen	8 %"	8 5/8"	9 ½"
3D3T no screen	7 11/16"	7 ½"	8 3/8"
4D4T no screen	10 3/16"	9 15/16"	10 13/19"

RISERS FOR TRACK	
Standard	1 3/4"
Add-on 1"	2 3/4"
Add-on 2 ³ /16"	3 ¹⁵ / ₁₆ "