


- HOSEBED CAPACITIES
- ① - 400' OF 1.75" D.J. POLY HOSE
  - ② - 250' OF 3.00" D.J. POLY HOSE
  - ③ - 800' OF 4.00" D.J. POLY HOSE
  - ④ - 800' OF 4.00" D.J. POLY HOSE
  - ⑤ - 300' OF 2.00" D.J. POLY HOSE
  - ⑥ - 250' OF 2.50" D.J. POLY HOSE

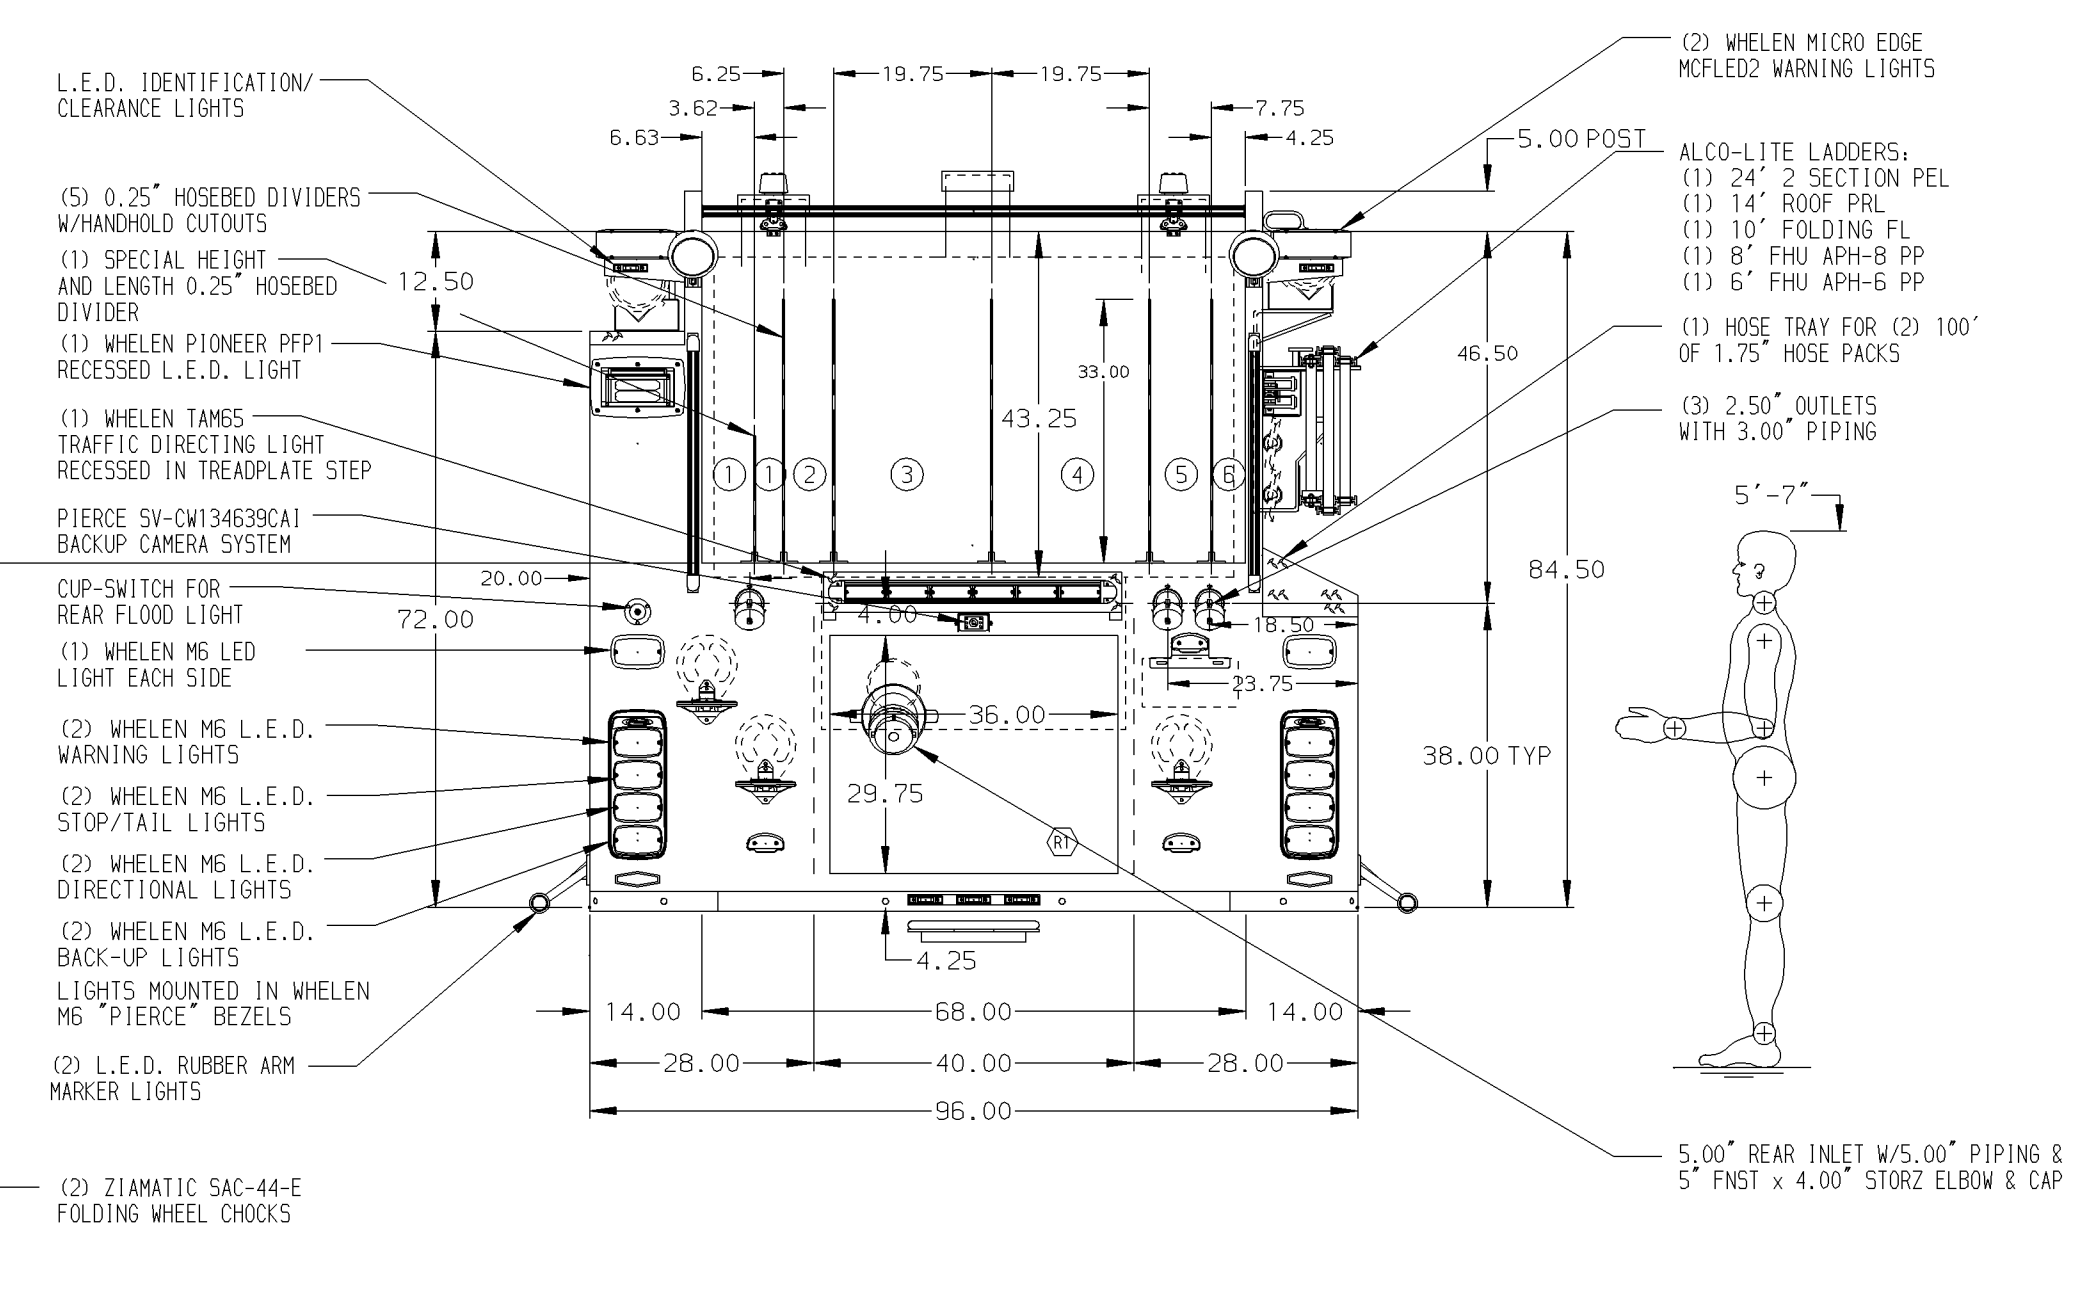

STAINLESS STEEL BODY MAXIMUM O.A.L. 367.00" MAXIMUM O.A.H. 115.00" SIDE ROLL & FRONTAL IMPACT PROTECTION

		JOB NO.	27983
		SCALE	DATE
TITLE	1500-D-750P W/(2) 25 GAL FOAM CELLS, 140" BODY, (2) XLAYS LADDERS ON SIDE, DELUGE, HUSKY FOAM, 200 CFM CAFS	DRAWN BY	AMI
FOR	ROCKVILLE VOLUNTEER FIRE DEPARTMENT ROCKVILLE, MARYLAND	CHECKED BY	WKL
DWG NO.	27983AD	SHEET SIZE	SHEET NO.
REV	DATE BY CH		1 OF 1

NOTE  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. PUMP PANEL DRAWING REQUIRED
2. UNSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
3. VOSEL LUBE SYSTEM PUMP LOCATED PER SHOP ORDER
4. ALUMINUM TREADPLATE EXTERIOR REAR WALL OF CAB
5. RADIO ANTENNA LOCATED PER SHOP ORDER
6. MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
7. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
8. BATTERY CHARGE INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BRACKET
9. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
10. PIERCE L.E.D. DUAL COMPARTMENT LIGHT STRIPS LOCATED PER SHOP ORDER
11. SHELF TRACKS LOCATED IN COMPARTMENT D3 & R1
12. MARINE GRADE PLYWOOD ON THE BACK WALL IN COMPARTMENT D1, D2 & D3
13. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENT D3 & R1
14. NYLON STRAP WITH VELCRO IN COMPARTMENT R1
15. ALL FOLDING STEPS TO BE TRIDENT WITH INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED
16. HERCULES 200 CFM COMPRESSED AIR FOAM SYSTEM
17. PIERCE LOGO MUFFLERS FRONT AND REAR
18. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON BOTH PUMP PANELS
19. ALUMINUM 4-WAY SCUFFPLATES LOCATED AT THE REAR CAB CORNERS
20. UPF "BLACK" PLASTIC W/1.00" SPACER RUB RAIL ON RUNNING BOARDS/BODY SIDES/TAILBOARD
21. FRONT AND REAR RUBBER FENDER CROWNS
22. PROSINE XANTREX 806-1802 1800W 120V INVERTER LOCATION BEHIND DRIVERS SEAT
23. TWO 15A 120V 3-PRONG RECEPTACLE LOCATED ONE EACH SIDE OF PUMP PANEL
24. HANSEN STAINLESS STEEL KNUBBLED DESIGNED HANDRAIL ABOVE HOSEBED
25. REVERSE HINGED DOOR ON COMPARTMENT D3 & P2
26. STAINLESS STEEL SCUFFPLATES ON REAR OUTSIDE EDGES OF BODY
27. DRI-DECK MATTING W/VELVEL ON FLOOR IN COMPARTMENT D1, D2, D3, D4, P1 & P2