

PUMPER  
BODY

Long Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM

18,000 Lb Dana Axle

AXLE, REAR

27,000 Lb Dana Axle

ENGINE

380 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

19" Extended Stainless Steel, Underslung

CAB

6010 Enforcer Cab

BODY

WATER TANK

1000 Gallon Poly Water Tank

COMPT, PUMPER, REAR

51.25" FF Rollup Rear Compt

COMPT, PUMPER, DRIVER SIDE

161" Rollup Full Height/Depth Front  
Full Height Rear FDLER

COMPT, PUMPER PASS. SIDE

161" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE

42" Control Zone Top Mount

PUMP

2000 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Crosslays Not Required

SPEEDLAYS

Speedlays Not Required

GENERATOR

Generator Not Required

Foam System

Husky 3 Single Agent Foam System


Foam Cell

20 Gallon Foam Cell, Not Reduced Water



NOTE  
DIMENSIONS SHOWN ARE APPROXIMATE  
AND ARE SUBJECT TO MINOR DEVIATIONS  
AS MAY OCCUR OR BE NECESSARY IN  
CONSTRUCTION.  
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN BUMPER CROSSLAY
2. HUSKY 3 RESERVOIR LOCATED PER SHOP ORDER
3. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE CAB CORNER
4. AIR INLET WITH KUSSMAUL AUTO EJECT ON DRIVER SIDE CAB CORNER
5. BATTERY CHARGER LOCATED BEHIND DRIVERS SEAT
6. BATTERY CHARGE INDICATOR DISPLAYED THROUGH DS CAB WINDOW
7. SIX ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
8. ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER SHOP ORDER
9. THREE SLIDE-OUT TOOLBOARDS LOCATED PER SHOP ORDER
10. ONE HORIZONTAL PARTITION LOCATED PER SHOP ORDER

11. ONE ADJUSTABLE HEIGHT SLIDE-OUT TRAY LOCATED PER SHOP ORDER
12. CIRCUIT BREAKER PANEL LOCATED IN COMPARTMENT D3
13. WIRING FOR DEALER INSTALLED GENERATOR LOCATED PER SHOP ORDER
14. ONE HANNAY CABLE REEL MODEL EF1618-17-18 LOCATED PER SHOP ORDER WITH 200' OF 10/3 CABLE
15. TWO 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER

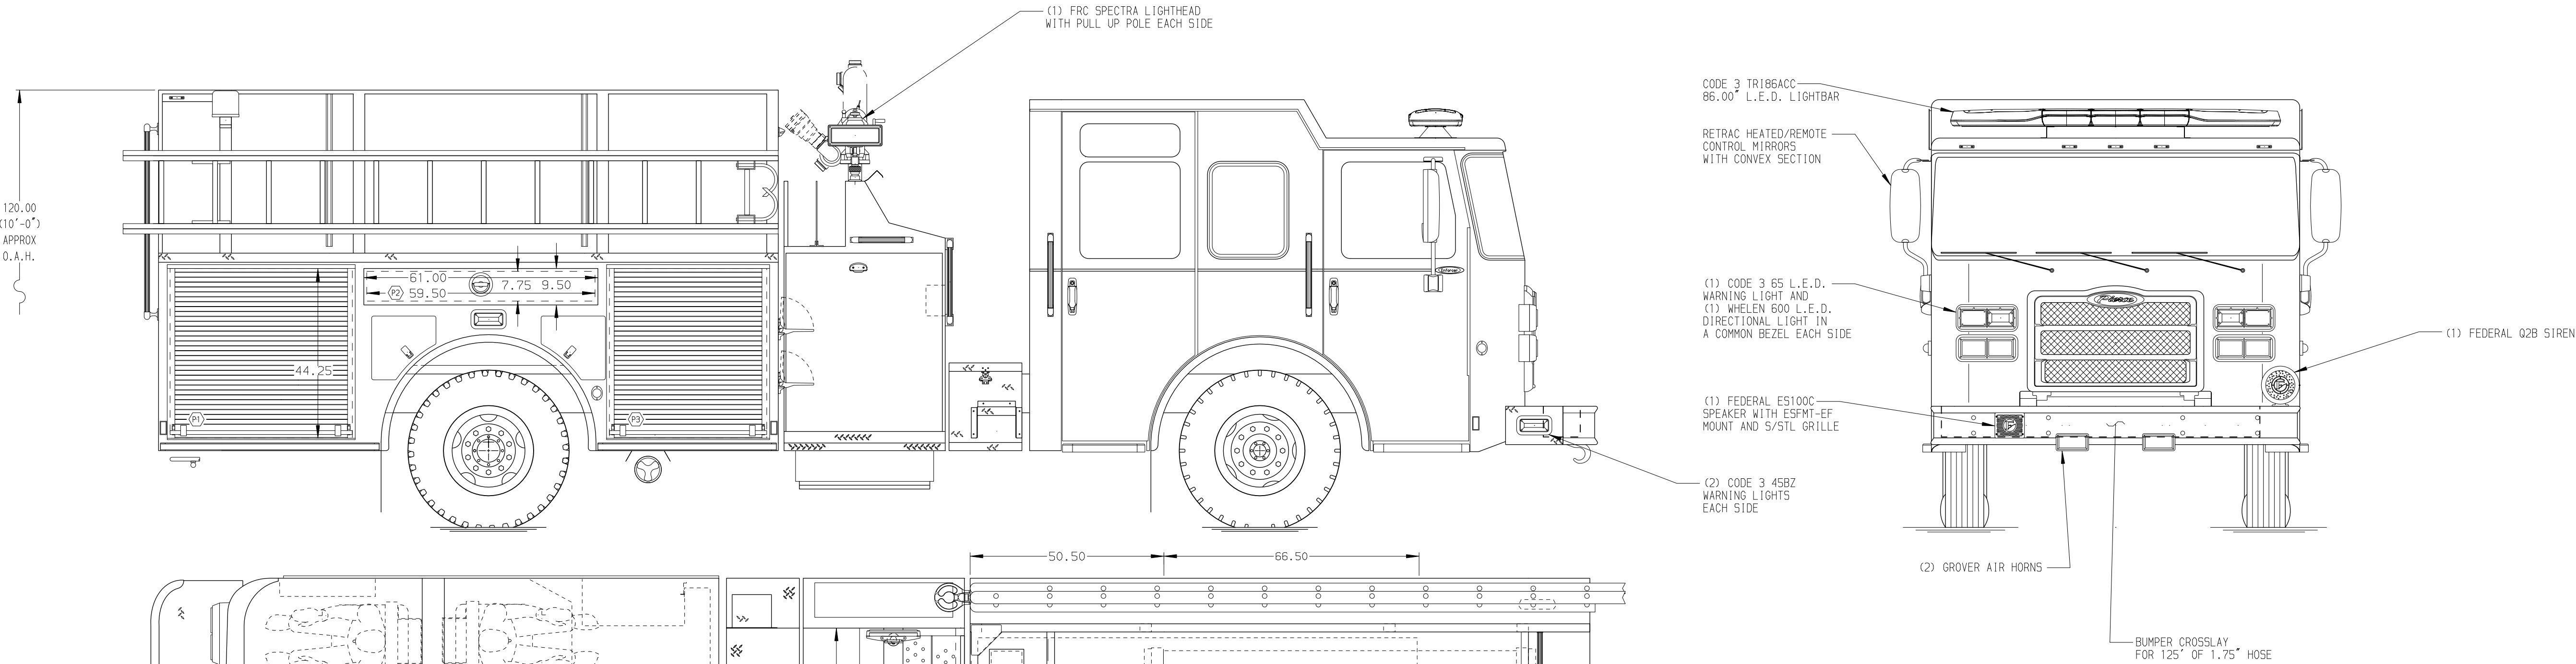

HOSEBED CAPACITY	
BED 1	350' OF 1.75" D.J. POLY HOSE
BED 2	250' OF 1.75" D.J. POLY HOSE
BED 3	250' OF 1.75" D.J. POLY HOSE
BED 4	900' OF 5.00" D.J. POLY HOSE
BED 5	300' OF 2.50" D.J. POLY HOSE ABOVE 250' OF 2.50" D.J. POLY HOSE

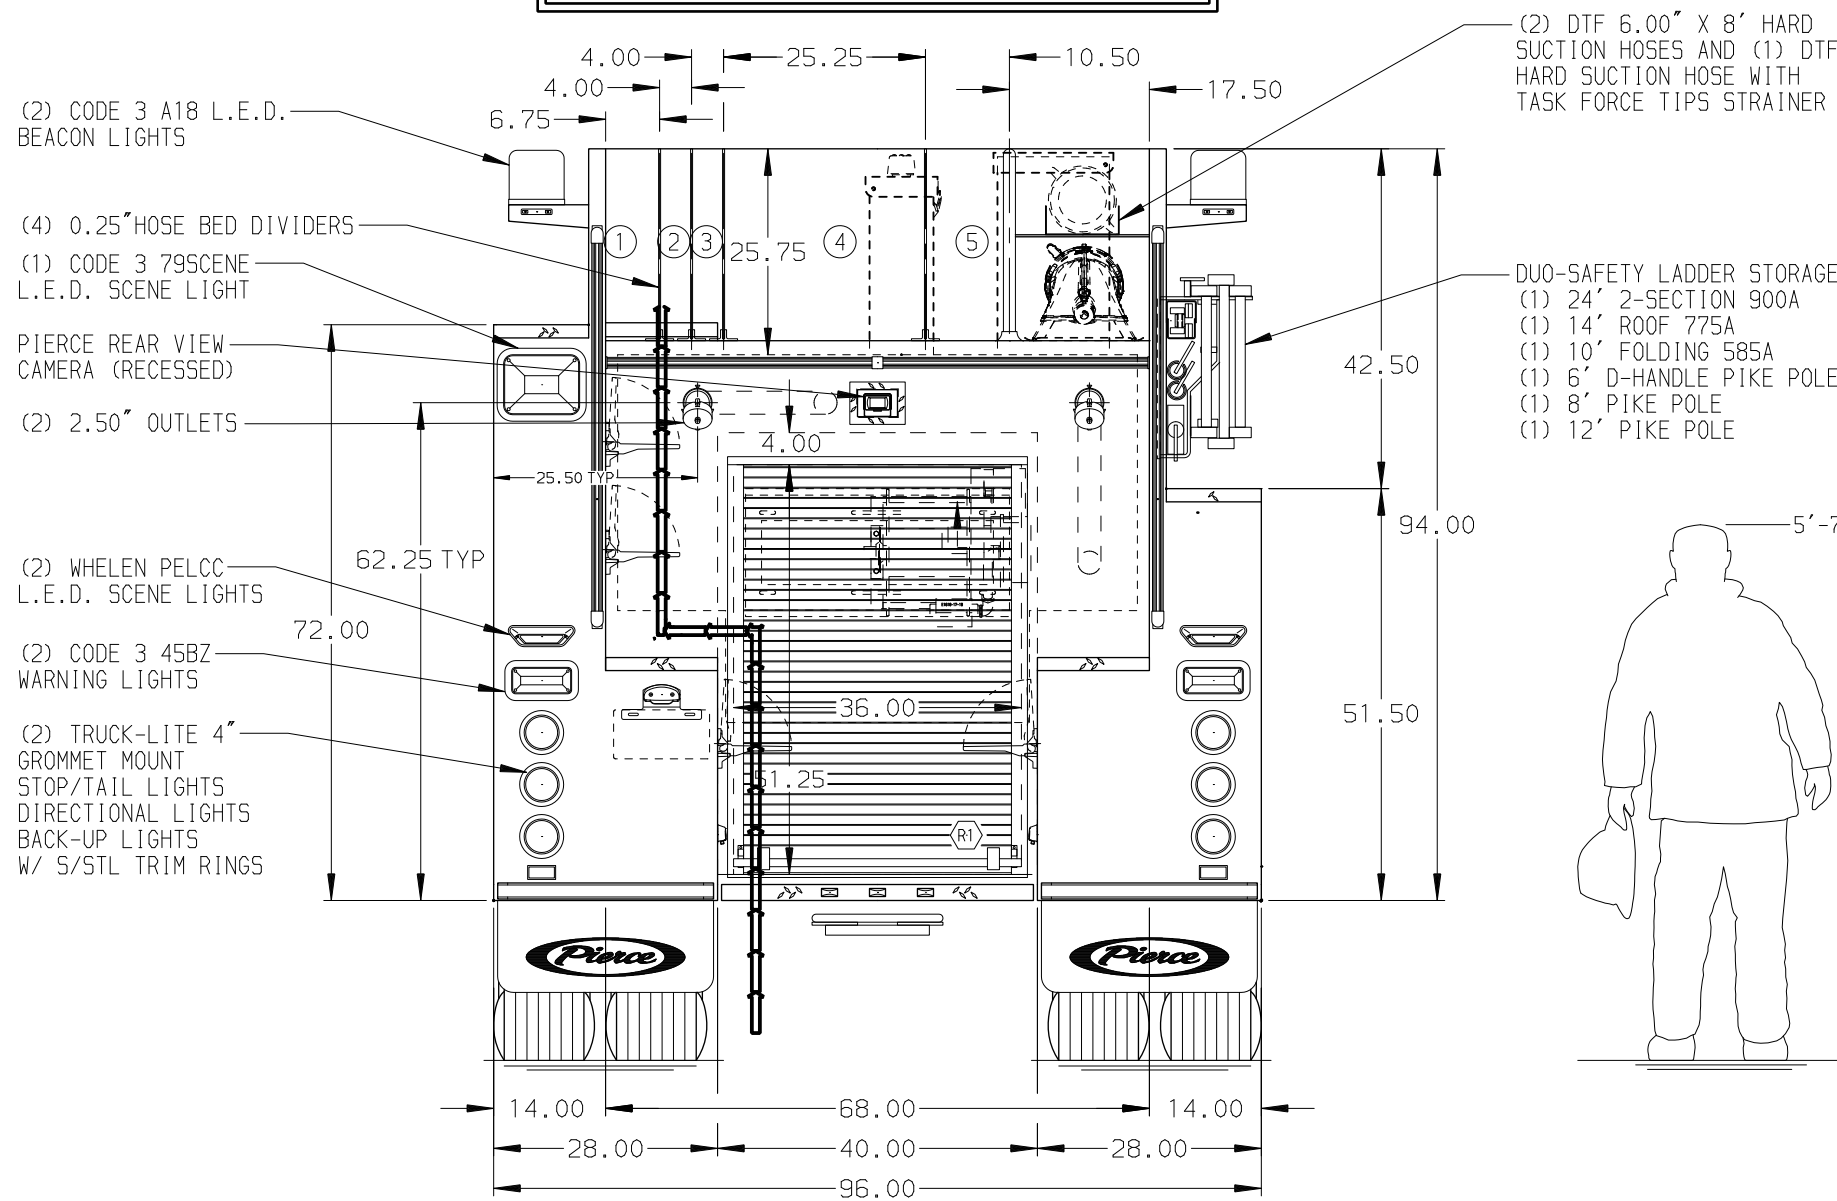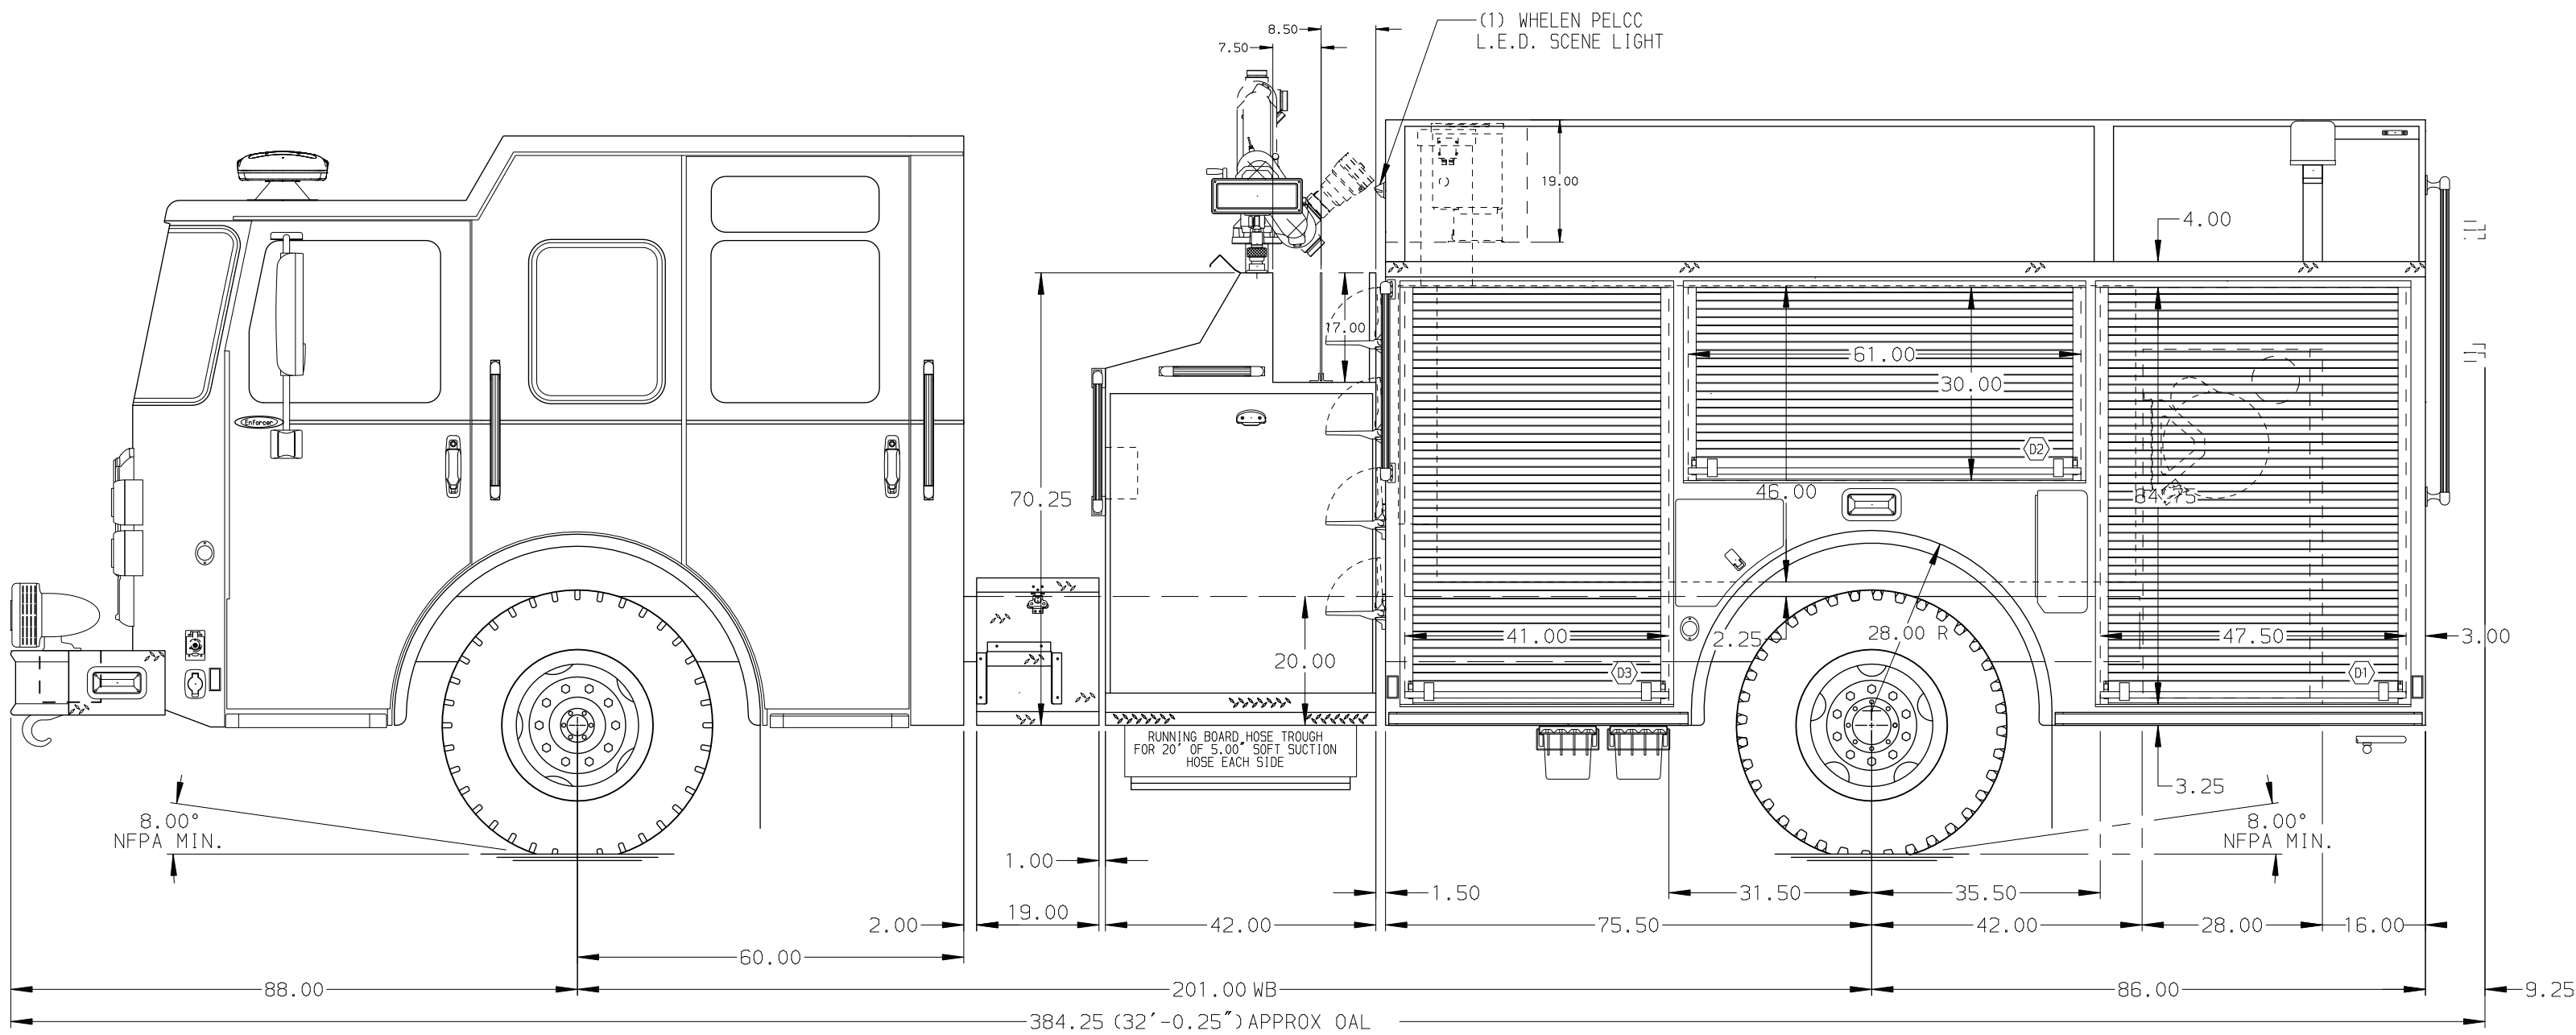

MAXIMUM O.A.L. - 408.00"

MAXIMUM O.A.H. - 137.00"

				CHASSIS DATA
				MAKE
				MODEL
REV	DATE	BY	CH	ENFORCER

<b>MANUFACTURING INC.</b>	JOB NO.	30987
	SCALE	DATE
	DRAWN BY	03JAN17
	CHECKED BY	04JAN17
TITLE	Pierce Pumper Approval Drawing	
	FOR	
DWG NO.	30987AD	
	SHEET SIZE	SHEET NO.
	D	1 OF 1