

PUMPER BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM
19,500 Lb TAK-4

AXLE, REAR
24,000 Lb Dana Axle

ENGINE
400 HP Cummins L9 Engine

TRANSMISSION
Allison 5th Gen, 3000 EVS P

BUMPER
22" Extended Steel Pointed

CAB
7010 Enforcer Cab

BODY WATER TANK
500 Gallon Poly Water Tank

COMPT, PUMPER, REAR
37.75" FF RollUp Rear Compt

COMPT, PUMPER, DRIVER SIDE
161" RollUp Full Height Front & Rear FDLER
Special Depth Upper

COMPT, PUMPER PASS. SIDE
161" RollUp Full Height Front & Rear FDLER
Special Depth Upper

FIRE SUPPRESSION PUMPHOUSE
45" Control Zone Side Mount

PUMP
1750 GPM Waterous CMU

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
2.50" Crosslays Not Required


SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required

Foam System
Foam System Not Required

Foam Cell
Foam Cell Not Required

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

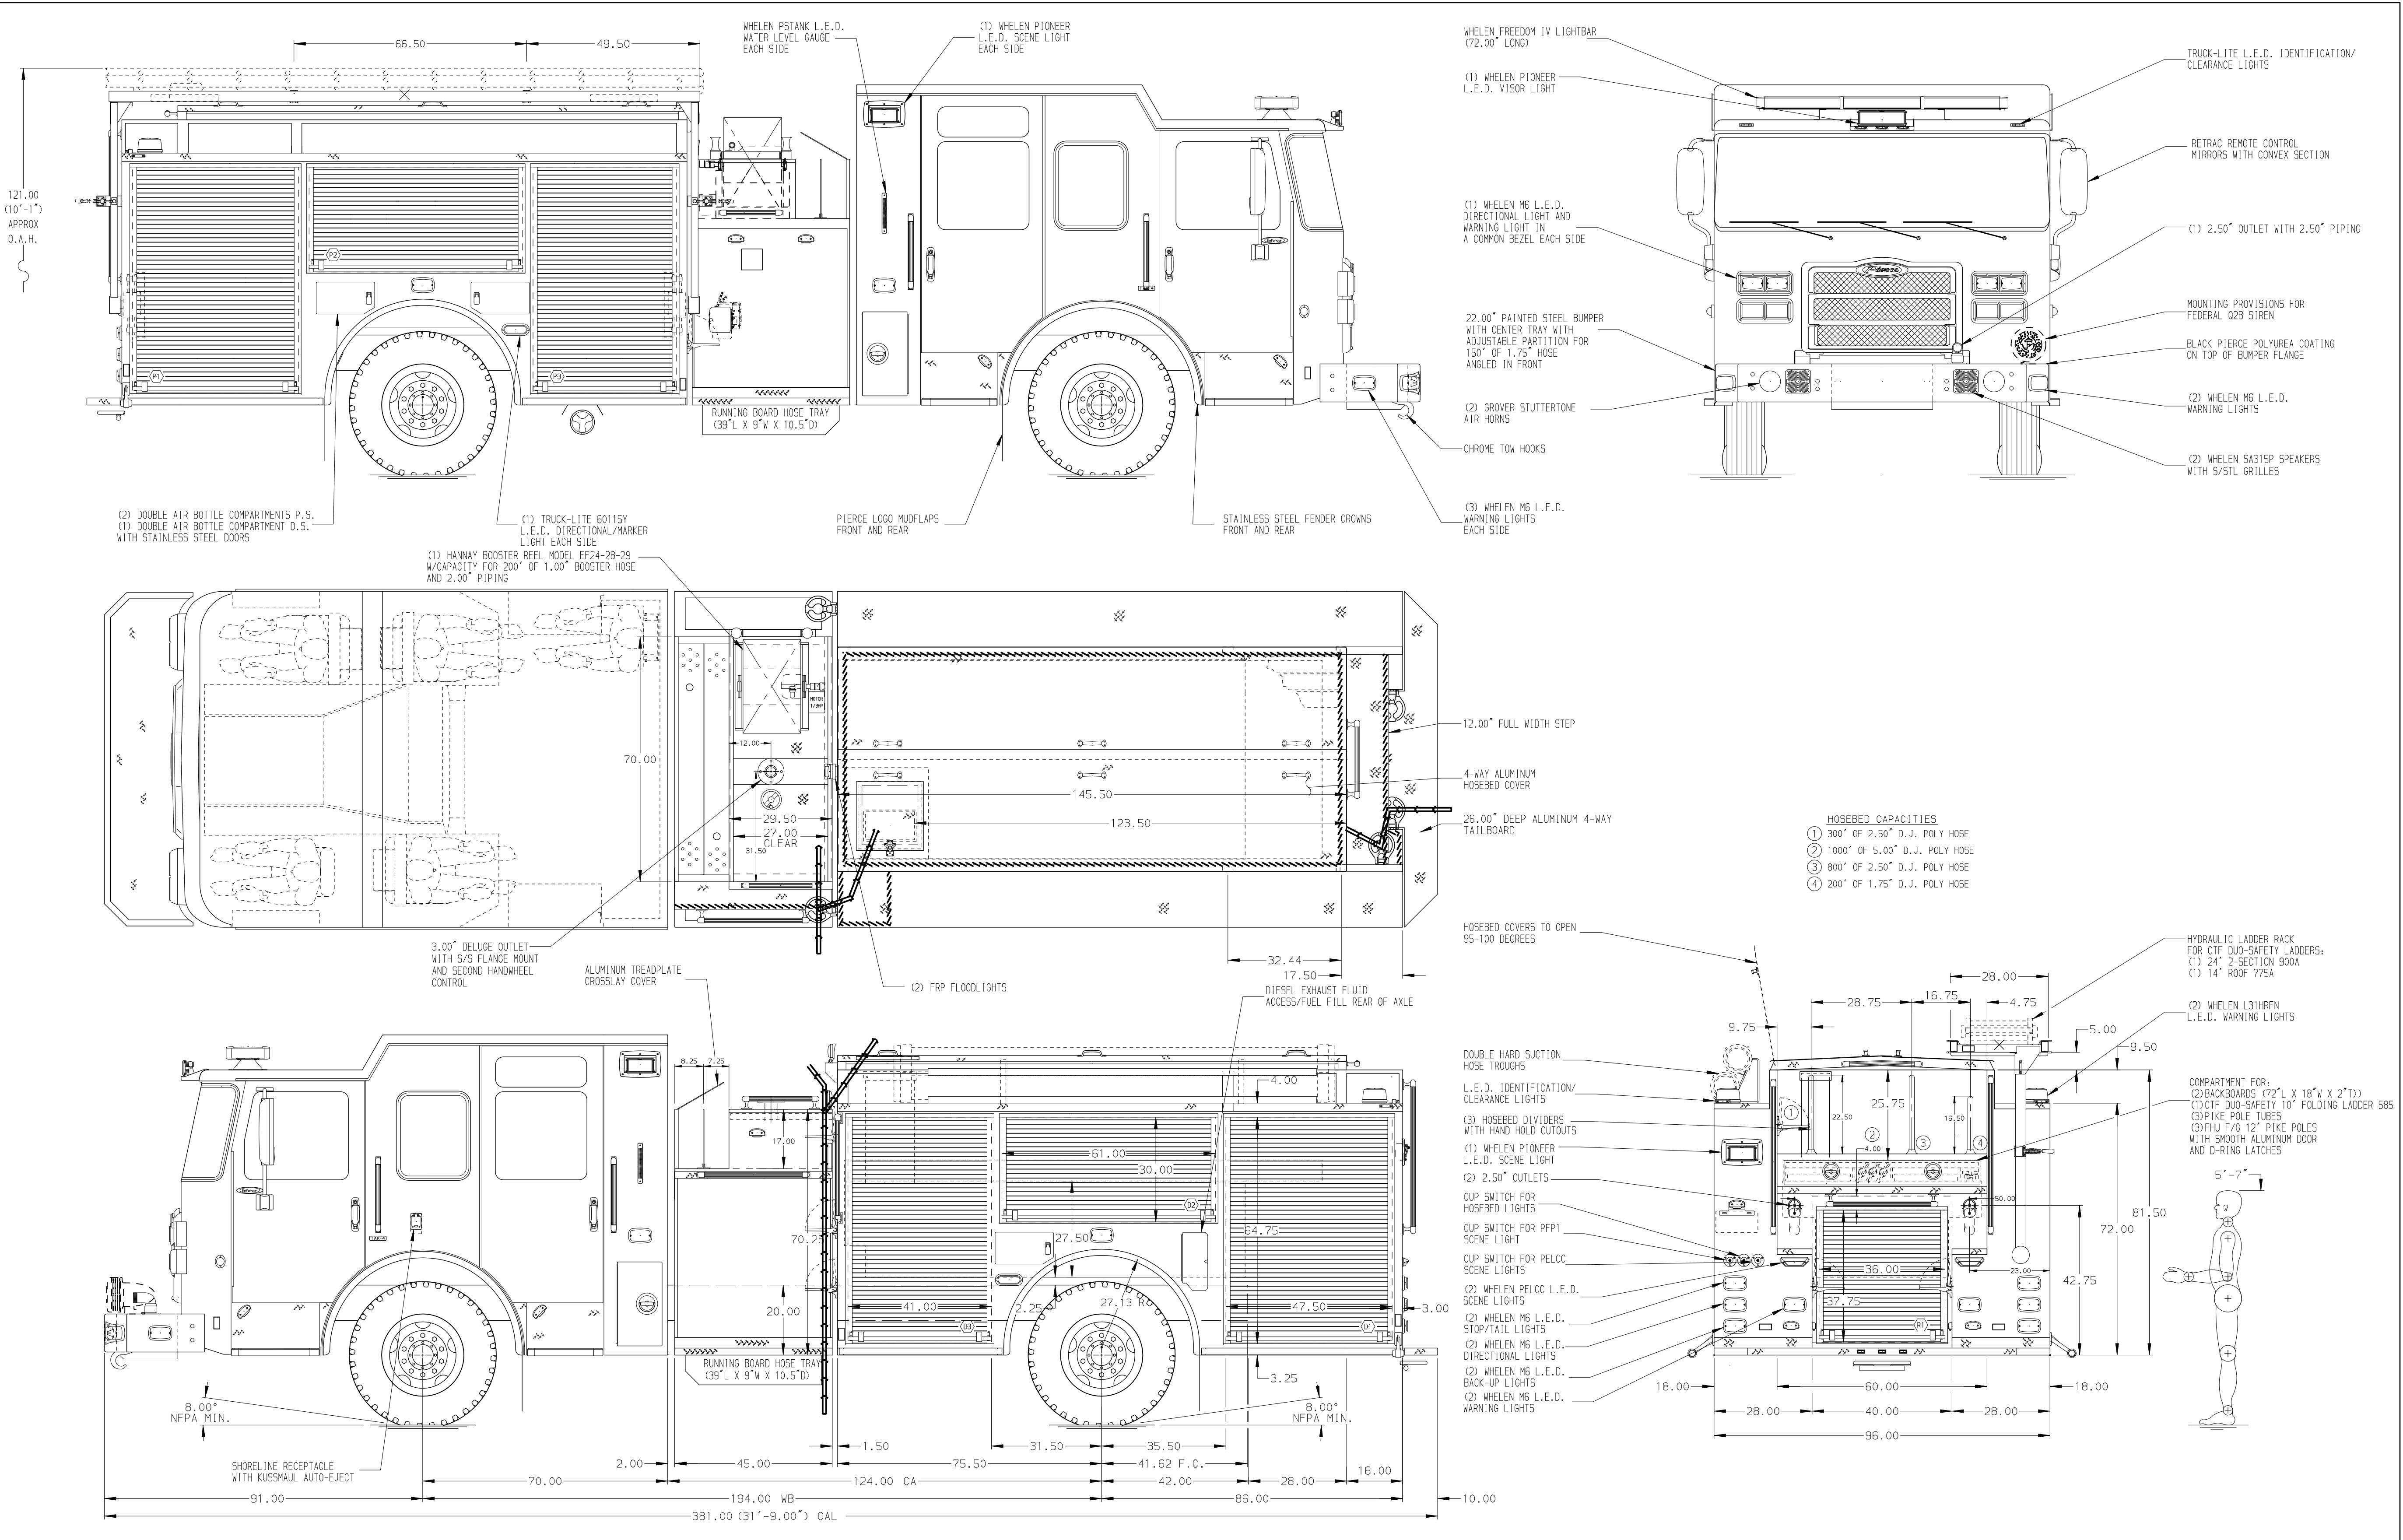

- VOGEL LUBE SYSTEM PUMP LOCATED PER SHOP ORDER
- ALUMINUM TREADPLATE EXTERIOR REAR WALL OF CAB
- S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
- MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGE INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BRACKET
- PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
- DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED D1, D2, D3, P1, P2, P3, R1
- PIERCE L.E.D. DUAL COMPARTMENT LIGHT STRIPS LOCATED PER SHOP ORDER
- SHELF TRACKS LOCATED IN COMPARTMENTS D1, D2, D3, P1, P2, P3, R1
- ONE FULL WIDTH/DEPTH PAINTED ADJUSTABLE SHELF IN COMPARTMENTS D2, P2, R1
- TWO FULL WIDTH/DEPTH PAINTED ADJUSTABLE SHELVES IN COMPARTMENTS D1, P1, P3
- THREE FULL WIDTH/DEPTH PAINTED ADJUSTABLE SHELVES IN COMPARTMENT D3
- PARTITION BETWEEN COMPARTMENTS D1/R1 AND P1/R1
- ONE VERTICAL PARTITION IN COMPARTMENT D1, D3
- THREE ADJUSTABLE VERTICAL PARTITIONS IN COMPARTMENT D1
- ONE POLY MOUNTING BOARD LOCATED IN COMPARTMENT P2, FIVE IN D3
- ALL FOLDING STEPS TO BE TRIDENT WITH INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED
- (1) 120V 4-PLACE RECEPTACLE LOCATED IN EMS COMPARTMENT
- AIR INLET WITH DISCONNECT COUPLING ON D.S. PUMP PANEL
- AIR OUTLET WITH SHUT OFF VALVE LOCATED ON D.S. PUMP PANEL
- TWO POLY TOOL BOXES LOCATED IN COMPARTMENT P2

CHASSIS DATA		TITLE	1750-D-500 GALLON POLY, 161" FDLER, SPCL DEPTH (2) X LAYS, DELUGE, BOOSTER REEL, HYD. LADDER RACK	JOB NO.	32096 01-06
MAKE		FOR	JACKSONVILLE FIRE AND RESCUE JACKSONVILLE, FLORIDA	SCALE	DATE
MODEL		CHECKED BY	KBO	1:24	12DEC17
ENFORCER		SHEET SIZE	D	13DEC17	
		DWG NO.	32096AD	SHEET NO.	1 OF 1