

# WallMaster® Series Smart Thru-the-wall Air Conditioners



QuietMaster®  
technology



Control  
with App



Save big  
on energy



Voice command  
compatible



**FRIEDRICH**

1883



THE EXPERTS IN ROOM AIR CONDITIONING

# WallMaster®

## Smart Thru-the-wall Air Conditioners

### HOME OR AWAY, YOU'RE IN CONTROL WITH THE FRIEDRICHCONNECT™ APP.

Integrated Wi-Fi control from your smartphone. Also compatible with Amazon Alexa and Google Home.

#### Connect in minutes

It's easy with our simplified set up process

#### Easily set your home, away, and night time preferences


Set a seven-day custom schedule that fits your lifestyle

#### You're in control anytime, anywhere

Power units off and on, increase or decrease a unit's set point temperature, change system cool, fan, heat, and auto settings and fan speeds

#### Controlling multiple units is simple

With our advanced grouping program, you can control multiple units to work independently or as a single system. You can even invite other users to manage one or more of your units

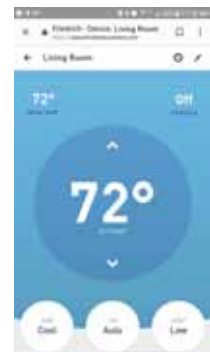

QuietMaster®  
technology



Control  
with App



Save big  
on energy



Voice command  
compatible

## Unrivaled quality

WallMaster® is built to perform in the extreme conditions of commercial applications, but it's also perfect for today's home with the convenience and simple control today's consumers demand.

- 1 Dense, sound-blocking insulation
- 2 Quiet rotary compressor mounted on large rubber grommets
- 3 Steel inner walls
- 4 Totally-enclosed commercial grade fan motor
- 5 Insulated air plenum prevents outside air and noise intrusion
- 6 Two resilient rings on motor mount prevent metal-to-metal contact, which eliminates extra vibration and noise.
- 7 Solid steel blower wheel housing for maximum sound reduction.



## QuietMaster® technology

Building the quietest air conditioners begins with the design process and continues through the selection of superior components and materials.

It is shaped by skilled manufacturing and refined through on-going product testing in our engineering lab.

The result is a noticeably quieter cooling and heating experience, as much as 40% quieter than competitor's products.

---

## Control via FriedrichConnect

- Built-in Wi-Fi
- Voice command compatible, Amazon Alexa/Google Home
- Create customizable, 7-day schedules
- Advanced grouping of multiple units

---

## Comfort & Convenience

- Premium remote control
- Smart Fan auto-adjusts fan speed to maintain desired temperature
- Check filter reminder
- Control panel lockout (ON/OFF)
- 3-speed fan
- Auto restart
- Electronic defrost control
- Individually adjustable louvers direct airflow to where it's needed most
- Washable, antimicrobial filter
- Money Saver® setting cycles the fan with the compressor
- Auto-changeover between cooling and heating (heat/cool models)

---

## QuietMaster® technology

- Up to 40% quieter than competitive models
- Steel inner wall and extra dense insulation blocks outdoor noise
- Vibration isolating design and components reduce operating noise
- Precision engineering delivers maximum air flow and air dispersion at low sound levels

---

## Durability & Quality

- Rotary compressor provides quiet, dependable performance
- Premium aluminum exterior grille
- Rifled copper tubing/high tech louvered fins for better efficiency
- Impact resistant front cover

---

## Earth Friendly

- ENERGY STAR® qualified models,
- Multiple scheduling options save energy
- Temperature limiting for maximum low and high temperature settings
- Smart grid capable via participating energy provider
- Environmentally-friendly R-410A refrigerant used in all models
- Recyclable packaging

---

## Safety & Security

- EntryGard® anti-intrusion protection secures chassis to sleeve to deter 'kick-in' intrusion
- UL listed for safe operation
- Insect barrier

---

## Installation Features

- Mounts flush with the exterior wall
- Ideal for thicker wall installations, where side fins don't fit
- Firm grip handles on the chassis for easy installation and removal from wall sleeve



## Heat and Cool Options

**WallMaster Electric Heat** models utilize an electric heat strip to provide warm air quickly. They can be used for primary heating in moderate climates and as supplemental heating in colder climates. They are ideal for rooms that are always 'too cold in winter'.

**WallMaster Heat Pump** WHT12A33A provides energy-efficient heating by extracting heat from the outside air. It can be used for primary heating in moderate climates and as supplemental heating in colder climates. It has back-up electric heat that will activate when outside temperatures are too cold for efficient heat pump operation.

Your Friedrich dealer or distributor can assist you in selecting the right WallMaster unit for your particular climate and application.

## OPTIONAL ACCESSORIES

### WSE SLEEVE/ EXTERIOR GRILLES



#### Standard Grille

Premium, expanded metal grille with powder coat paint. Ships with WSE sleeve.




#### Optional Architectural Grille- AG

Premium extruded aluminum grille.

#### IMPORTANT:


Operating the air conditioner with incorrect rear grille or without Baffle Adapter Kit (on 19 3/4" deep sleeve) will recirculate discharge air and cause compressor overload to trip.

#### CORRECT Vertical Louvers



This will cause the unit to shut down temporarily and may lead to premature compressor failure.

#### INCORRECT Horizontal Louvers



#### WSE Wall Sleeve

Ships with standard grille (shown above) and standard galvanized steel inner panel and painted steel outer panel.



WSE sleeve



Steel inner panel



Outer weather panel

## INSTALLATION ACCESSORIES

#### DK / Drain Kit

Installed at the back of the unit and allows for attachment to condensate disposal system, if necessary or desired.



#### IDK / Internal Drain Kit

New construction applications where a condensate drain system has been built into the wall interior.



#### BAK / Baffle Adapter Kit

Necessary when installing in a sleeve deeper than 16 3/4" deep, such as Fedders B sleeve (19 3/4" deep).



## A PERFECT FIT IN FEDDERS A & B\* 27" SLEEVES

Replace old, inefficient 27" sleeve units with WallMaster



Dimensions	Friedrich WSE Sleeve	Fedders A Sleeve	Fedders B Sleeve*
Height (inches)	16 3/4"	16 3/4"	16 3/4"
Width (inches)	27"	27"	27"
Depth (inches)	16 3/4"	16 3/4"	19 3/4"

\*Installation in Fedders B sleeve requires a baffle adapter kit-BAK.

## CHASSIS DIMENSIONS

Height	Width	Depth	Height of Front	Width of Front	Depth with Front	Minimum Extension Into Room with Front
15 3/4"	26 1/2"	21"	17 1/4"	27 1/2"	23 3/4"	7 1/2"

## WSE SLEEVE DIMENSIONS

Height	Width	Depth	Depth with Front	Minimum Extension Outside	Thru-the-wall Finished Hole		
					Height	Width	Max. Depth
16 3/4"	27"	16 3/4"	24 1/4"	9/16"	17 1/4"	27 1/4"	15 5/16"

NOTE: Chassis requires WSE sleeve (sold and shipped separately)

# SPECIFICATIONS

★ ENERGY STAR® models

Model	UPC	Cooling Btu	Heating Btu	Volts Rated	Cooling Amps	Cooling Watts	Heating Watts	Heating Amps	EER	CEER	Estimated Yearly Energy Cost	COP	Moisture Removal Pints per Hr.	CFM	Wt Lbs Net/Ship
<b>Cooling Only</b>															
★ WCT08A10A	724587436655	8000	—	115	7.0	748	—	—	10.7	10.6	\$73	—	1.8	250	93/97
★ WCT10A10A	724587436662	10000	—	115	9.3	935	—	—	10.7	10.6	\$92	—	2.4	250	103/107
★ WCT12A10A	724587436952	12000	—	115	11.1	1250	—	—	9.6	9.5	\$122	—	3.8	295	101/105
★ WCT10A30A	724587436945	10000	—	230	4.4	935	—	—	10.7	10.6	\$92	—	2.7	275	112/116
WCT12A30A	724587436969	12000	—	230	5.4	1250	—	—	9.6	9.5	\$123	—	3.8	300	109/113
WCT16A30A	724587436976	15400	—	230	7.5	1638	—	—	9.4	9.3	\$161	—	4.8	290	119/123
<b>Cooling with Heat Pump</b>															
WHT12A33A	724587436983	11100	8900	230	5.5	1181	1087	5.0	9.4	9.3	\$102	2.4	3.1	275	111/115
<b>Cooling with Electric Heat</b>															
WET10A33A	724587436990	10000	11000	230	4.4	935	3550	16.0	10.7	10.6	\$92	—	2.7	260	104/108
WET12A33A	724587437003	12000	11000	230	5.4	1250	3550	16.0	9.6	9.5	\$123	—	3.8	290	107/111
WET16A33A	724587437010	15400	11000	230	7.5	1638	3550	16.0	9.4	9.3	\$161	—	4.8	290	119/123

Heat Pump heating information (shown in red) indicates heat pump heating performance. Electric Heat heating information (shown in red) indicates electric heat strip performance. For Heat Pump electric heating performance refer to corresponding Electric Heat model.

**HEATING PERFORMANCE:** Change-over from heat pump operation to resistance operation on models indicated is automatic at a preset outside ambient temperature of approximately 35°F.




Calculate the heat loss of the space to be heated. As long as the heat loss does not exceed the resistance heating capacity rating of the unit, the heating performance will be satisfactory.

Note: all models will produce condensate. If condensate disposal is desired, an optional drain kit is available.

**DEFROST CONTROL:** Initiated at 30°F (outdoor coil temperature) and terminated at 43°F (outdoor coil temperature). During defrost, the compressor stops and the electric heat starts, then operates with the fan to maintain indoor comfort. Below 43°F, the unit remains in electric heat mode.

**DEFROST DRAIN:** Drain automatically opens at approximately 50°F to prevent condensate from freezing inside drain pan.

## PLUG FACE/CIRCUIT RATING

Model	Circuit Rating Breaker or T-D Fuse	Plug Face (NEMA#)	Power Cord Length (ft.)	Wall Outlet Appearance
WCT08A10A, WCT10A10A and WCT10A30A	125V - 15A	5 - 15P	6	
WCT12A10A, WCT12A30A and WCT16A30A	250V - 15A	6 - 15P	6	
WHT12A33A, WET10A33A and WET12A33A, WET16A33A	250V - 20A	6 - 20P	6	

Power cords are located on front left of WallMaster models.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.

As an ENERGY STAR® partner, Friedrich Air Conditioning Co. has determined that the selected ENERGY STAR® models meet the ENERGY STAR® guidelines for energy efficiency.

EER is the unit's Energy Efficiency Ratio; CEER is the unit's Combined Energy Efficiency Ratio.

Your energy costs will depend on your utility rates and use. The estimated energy cost is based on a electricity cost of \$.12 per kWh.

For more information, visit [www.ftc.gov/energy](http://www.ftc.gov/energy).

Model	Carton Dimensions		
	Height	Width	Depth
WallMaster®			
WSE Sleeve	18"	27 1/4"	18"
Chassis	19 3/8"	30 5/8"	27 1/2"



Friedrich Air Conditioning Co. | 10001 Reunion Place, Suite 500 | San Antonio, TX 78216 | 877.599.5665 | [www.friedrich.com](http://www.friedrich.com)

