



# CANTER 7C15

## RHD

### Dimensions

Model	Vehicle model					7C15					
	Cab type / crew					Comfort, single cab / 3					
	Model variant		46834322		46834522		46834722		46834822		46834925
	FUSO model code		FEB71CR4SEU3		FEB71ER4SEU3		FEB71GR4SEU3		FEC71HR4SEU3		FEC71KR4SEU3

### DIMENSIONS mm

Wheelbase		2800	3400	3850	4300	4750
Overall length		5135	5935	6685	7185	7735
Cab length		1625				
Width overall		2025			2135	
Cab width		1995				
Height overall		2200	2195	2195	2205	2205
Track width	Front / rear	1665 / 1560			1665 / 1670	
Frame height (at end of frame)		830				
Ground clearance		185				
Cab to rear axle		2275	2875	3325	3775	4225
Cab to end of frame		3470	4270	5020	5520	6070
Max. body length**		3995	4985	5725	6470	7210
Frame width		750			850	
Front overhang		1140				
Rear overhang		1195	1395	1695	1745	1845
Front axle to front of body		625				
Recommended distance cab to body		100				

### WEIGHTS kg



Empty weight*		2490		2525		2540		2585		2605	
	Front* / rear*	1625	865	1635	890	1640	900	1650	935	1670	935
Minimum vehicle weight		2650									
Gross vehicle weight / gross combination weight		7490 / 10,990									
Axle loads	Front / rear	3100 / 5990									
Towed weight	Braked / unbraked	3500 / 750									
Chassis load bearing capacity		5010	4975	4960	4915	4895					

### CALCULATED OUTPUT

Max. speed	km/h	130									
Max. climbing ability	(tan q)%	30									
Min. turning circle (m)	Kerb to kerb	10.4	12.2	13.8	15.2	16.6					
	Wall to wall	11.8	13.8	15.2	16.6	18.0					


\* including coolant, oil, 90% fuel, tyre sealant, tools and driver weighing 75 kg; \*\* calculated maximum value. Should be checked depending on the body installed and the particular application

Subject to change without notice. The information in this data sheet should be considered approximate. The illustrations may show accessories and special equipment not part of the standard specification. This data sheet may also contain models and support services not available in certain countries.

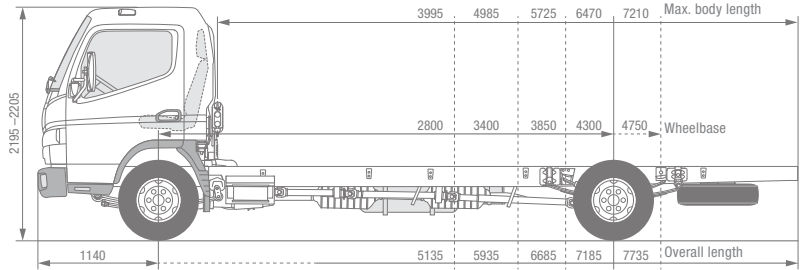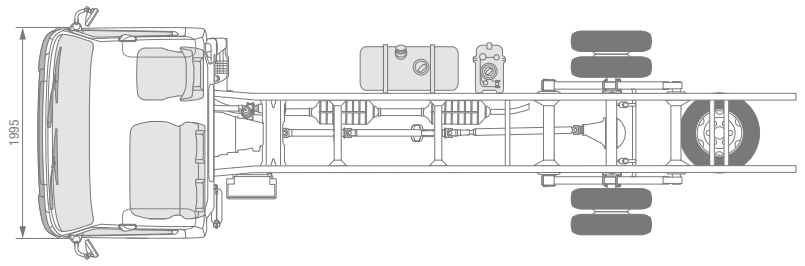



# CANTER 7C15 RHD

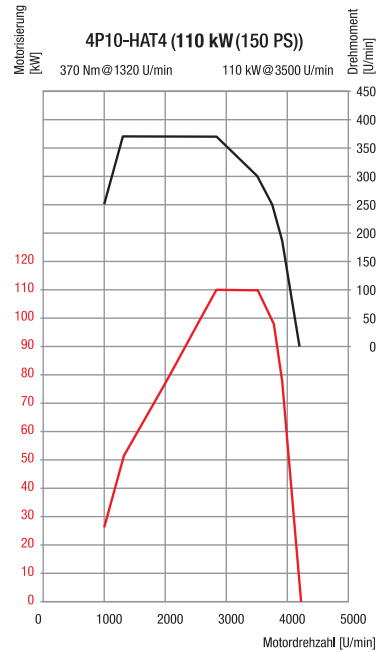

## Engine/Drivetrain/Chassis

ENGINE (Euro VI)				
Type	Water-cooled four-stroke diesel engine with turbocharger, intercooler and direct injection			
No. of cylinders	4/in-line			
Capacity	2998 cc			
Peak output	110 kW (150 hp) / 3500 rpm			
Rated torque	370 Nm / 1320 rpm			
Diesel particulate filter	Service life approx. 300,000 km			
Alternator	Alternating current 12V, 140A			
Exhaust gas aftertreatment	SCR + DPF			
Fuel consumption	Total	Dependent on chassis equipment and installed bodies		
Emissions	Total	Dependent on reference dimension		
PTO (optional)	Type	31 kW with flange	62 kW with flange	31 kW for directly connected pumps
	Torque at peak output	196 Nm	392 Nm	196 Nm
	Gear ratios	1:0.644	1:0.723	1:0.638
	Engine speed at peak output	1500 rpm		

## POWERTRAIN

Transmission	Model	Manual gearbox, 5 forward gears, 1 reverse gear
	Gear ratio	5.494 - 3.193 - 1.689 - 1.000 - 0.723 Rev. 5.494
Final reduction gear	Ratio	4.875

## CHASSIS

Front axle / rear axle	Model	F350T / R035T
	Load-bearing capacity	3100 kg / 6000 kg
Tyres		205/75R17.5C 124/122 M
		Single tyres at front, twin tyres at rear, tyres with optimised rolling resistance
Wheel		17.5 x 6.00 - 127 - 9t - 6 wheel bolts
Steering		RHD
		Recirculating-ball steering with power assist, tilting telescopic steering column with steering-wheel lock
Brake	Service brake	Hydraulic with vacuum power assist, dual-circuit with load-dependent brake proportioning valve at rear wheels
	Front / rear	Disc brake (252 x 40)
	Parking brake	Mechanical expanding brake on drive shaft at rear of transmission
	Auxiliary brake	Exhaust brake (50 kW)
Suspension	Front / rear	Semi-elliptic leaf spring with shock absorber and stabiliser
Frame	Type	Ladder-type frame with reinforcements and crossmembers
Fuel tank capacity		100 litres
Electrical system – batteries		12 Volt (100 AH - 760 A(EN))