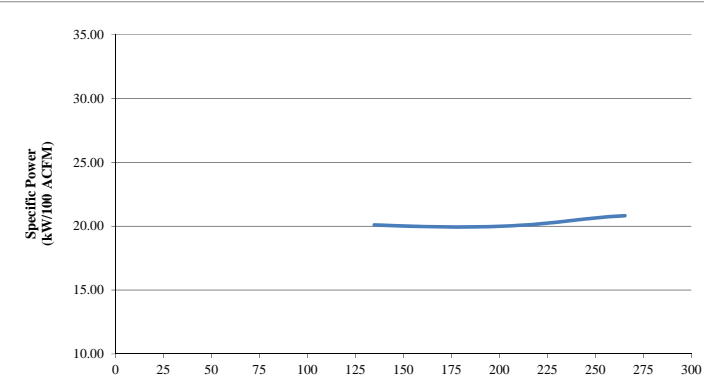


COMPRESSOR DATA SHEET

Rotary Compressor: Variable Frequency Drive

MODEL DATA - FOR COMPRESSED AIR			
1	Manufacturer: Mattei Compressors Inc.		
2	Model Number: OPTIMA 45		Date: May-15
	<input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled	Type: Vane	
	<input checked="" type="checkbox"/> Oil-injected <input type="checkbox"/> Oil-free	# of Stages: 1	
3	Rated Operating Pressure	116	psig ^b
4	Drive Motor Nominal Rating	60	hp
5	Drive Motor Nominal Efficiency	95.0	percent
6	Fan Motor Nominal Rating (if applicable)	1.5	hp
7	Fan Motor Nominal Efficiency	n/a	percent
8*	Input Power (kW)	Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d
	55.27 Max	265.4	20.83
	51.56	249.7	20.65
	43.94	218.1	20.15
	37.14	186.2	19.94
	30.64	153.2	20.00
27.10 Min	134.8	20.11	
9*	Total Package Input Power at Zero Flow ^{c, d}		4.92 kW
10	 <p style="text-align: center;">Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity</p>		

*For models that are tested in the CAGI Performance Verification Program, these items are verified by program administrator

Consult CAGI website for a list of participants in the third party verification program: www.cagi.org

- NOTES:
- a. Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; acfm is actual cubic feet per minute at inlet conditions.
 - b. The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
 - c. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
 - d. Tolerance is specified in ISO 1217, Annex E, as shown in table below:
- NOTE: The terms "power" and "energy" are synonymous for purposes of this document.



Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
m ³ / min	ft ³ / min	%	%	
Below 0.5	Below 15	+/- 7	+/- 8	+/- 10%
0.5 to 1.5	15 to 50	+/- 6	+/- 7	
1.5 to 15	50 to 500	+/- 5	+/- 6	
Above 15	Above 500	+/- 4	+/- 5	

ROT 031

10/11 R7 This form was developed by the Compressed Air and Gas Institute for the use of its members. CAGI has not independently verified the reported data.