



ULT-ALLCRB36



ULT-ALLCI12

ULT-ALLCRB36

All-In-One 2 Megapixel/1080p TVI/CVI/AHD or Analog Miniature Cylinder Camera

Features


- 1/3" Panasonic 2.2 Megapixel Progressive Scan CMOS
- 1080p Hybrid HD (TVI/CVI/AHD)
- CVBS (960H) Options
- 3D-DNR (Digital Noise Reduction)
- Sens-up
- D-WDR
- IP67 Waterproof Rating (ULT-ALLCRB36 Only)
- OSD Remote (Attached to cable)
- 19mm Diameter
- 12VDC Operation



Video Output Signal:

- Press LEFT key and hold for 5 seconds: 960H CVBS
- Press RIGHT key and hold for 5 seconds: TVI
- Press UP key and hold for 5 seconds: AHD
- Press DOWN key and hold for 5 seconds: CVI

Camera	ULT-ALLCRB36	ULT-ALLCI12
Image Device	1/3" type Panasonic MOS	
Scanning System	Progressive Scan	
Total Pixels	1956(H) x 1266(V): 2.48 Megapixel	
Effective Pixels	1944(H) x 1092(V): 2.12Megapixel	
Lens fitted	3.6mm Megapixel	12mm
Angle of View	(96(H)/72(V)/120(D))	(48(H)/33(V)/20(D))
Min. Illumination	0.1Lux@F2.5, 30IRE	
Sync System	Internal	
Electronic Shutter	60Hz : 1/30~1/30,000sec, 50Hz : 1/25~1/30,000sec	
Video		
Output	TVI/CVI/AHD/CVBS(960H)	
Resolution & Frame rate	1080@30p/25p, 720@30p/25p	
Other		
Rating	IP67 Waterproof Rating	Indoor
Operating Temperature	14°~122° (-10°C~+50°C)	n/a
Storage Temperature	-4°~140° (-20°C~+60°C)	n/a
Humidity	Less than 80%	
Power Consumption	DC 12V(±10%), Max.130mA	
Weight	Approx. 0.48lbs (220g)	

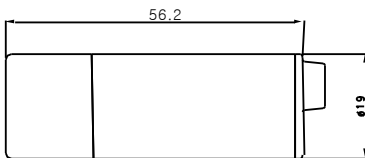

Ordering Information

- ULT-ALLCRB36:** 2 Megapixel Miniature Cylinder, 3.6mm
- ULT-ALLCI12:** 2 Megapixel Miniature Cylinder, Indoor 12mm

2 MEGAPIXEL | 1080p