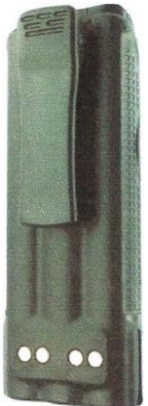


# Waveband Communications

<b>LMR BATTERY SPECIFICATIONS</b>	PART NUMBER
	WM8923-NI-MH-IS

COMPATIBLE RADIOS	Motorola XTS3000, XTS3500, XTS5000, EF Johnson 5100, 51SL ES, Ascend ES
REPLACES OEM BATTERY	RNN4007AR
CERTIFICATIONS & RATINGS	Certified by SGS to TIA-4950 / CSA C22.2 No. 157 / UL 913 5 <sup>th</sup> Edition standard for intrinsically safe use (Class I, 11, III, Division 1, Groups C, D, E, F, G, T3C) and non-incendive use (Class I, Division 2, Groups A, B, C, D, T3C). IP64 rated.
COMPATIBLE CHARGERS	Endura TWC1-MT13B, TWC1M-MT13B, TWC2M-MT13-D, TWC6M-MT13B, TWC12M-MT13-D
VOLTAGE/ CAPACITY	7.5V / 3500 mAh
CHEMISTRY	NiMH
CELL TYPE	FOK HR-4/3AU (Japanese)
OPERATING TEMPERATURE	0° C to +50° C (discharge) / 0° C to +40° C (charge)
CHARGE CYCLES	500
CHARGE TYPE	Rapid or trickle
CONDITIONER COMPATIBLE	Yes
THERMAL PROTECTION	Yes
HOUSING MATERIAL	ABS
HOUSING SEAL	Ultrasonic weld
METAL WELDING	Pure nickel tabs w/ spot welder
CLIP	Included
WARRANTY	12 months
PRODUCT PHOTO (Brand: Logic Energy)	 <div data-bbox="966 1534 1258 1758"> <p>PN: LE4007MHXTIS 7.5V / 3500 mAh / 26.3 Wh</p> <p>!MRGr NIMH BATTEAY</p> <p>CAUTION: DO NOT RECHARGE OR DISCHARGE BATTERY IN HIGH TEMPERATURE ENVIRONMENT. DO NOT SHORT CIRCUIT BATTERY. DO NOT DISPOSE OF BATTERY IN FIRE.</p> <p>ATTRIBUTION NE 2015 vs. IIS ERIM 1. EC11AAGE II. CETTE PILE DANS UN ENVOI D.C. ERREUR, NE PAS OUBLIER DE SE DÉCHARGER.</p> <p>Non-Recyclable For Class I, Division 1, Groups C, D, E, F, G, T3C Groups A, B, C, D, T3C</p> <p>YADEINUSA</p> </div>