



SERVICE BOX ACCESSORIES

Rods & Risers
Extensions
Tools




SERVICE BOX ACCESSORIES

Rods & Risers

Centering Rod Adapter for 2½" Service Box

The 2½" Centering Rod Adapter is self-centering, assuring correct alignment of the curb stop, service box rod and curb box wrench in Buffalo Style service boxes.

The Centering Rod Adapter fits all curb stops. The 5/8" shaft is heavier than most service box rods making it strong enough to be used with 2" curb stops.

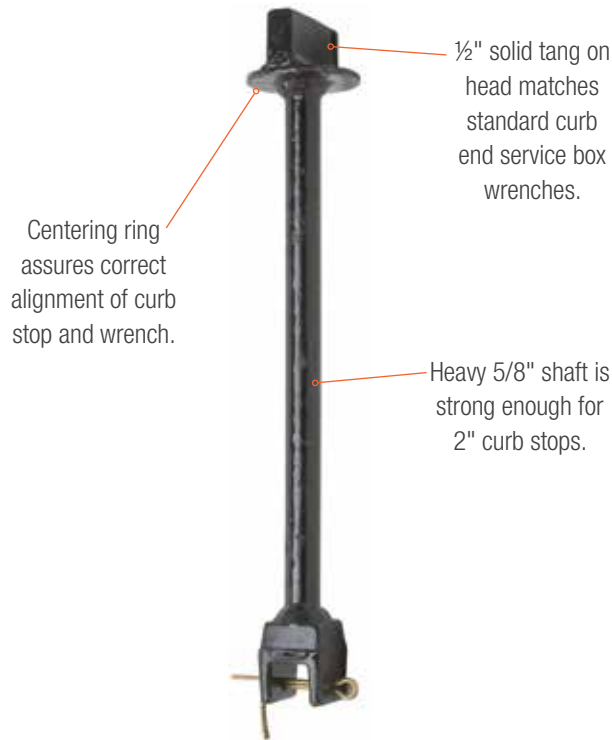

Telescoping Top Riser for 2½" Service Box

- Fits existing slide or screw type boxes by simply breaking off the pentagon bolt-tab.
- Has an adjustment height of 1" (minimum) to 12" or 24" (maximum).
- The top of the riser is offset to prevent it from turning while the pentagon stud is removed.
- Cover with standard pentagon head bolt is furnished.
- Furnished with Dirt Shield.



| PRODUCT DESCRIPTION | LENGTH | WT. | PART NO. |
|---|---------|---------|----------|
| Centering Rod Adapter for 2½" Service Box | 6 in. | 2 lbs. | 45349 2 |
| Centering Rod Adapter for 2½" Service Box | 12 in.* | 2 lbs. | 45349 1 |
| Centering Rod Adapter for 2½" Service Box | 24 in. | 5 lbs. | 45349 3 |
| Centering Rod Adapter for 2½" Service Box | 36 in. | 9 lbs. | 45349 4 |
| Centering Rod Adapter for 2½" Service Box | 48 in. | 14 lbs. | 45350 |
| Centering Rod Guide (not shown) | — | 1 lb. | 45349 |
| Telescoping Top Riser for 2½" Service Box | 12 in. | 8 lbs. | 45345 |
| Telescoping Top Riser for 2½" Service Box | 24 in. | 15 lbs. | 45345 3 |
| Dirt Shield (only) | — | < 1 lb. | 45345 1 |

* Stock size, zinc plated

SERVICE BOX ACCESSORIES

Service Box Extensions

Service Box Extensions

Our service box extensions are made from Schedule 40 pipe and are used to increase the height of an existing service box or to accommodate greater depth in a new installation. The service box extension is installed by removing the existing cover and sliding the extension over the top of the box pipe. The extension is adjusted to the desired height and the set screw(s) are tightened to lock it in place before replacing the cover. Extensions are made in lengths from 3" to 24".



5/16" hardened, square head, cup point set screws for extra holding power and adjustability

| PRODUCT DESCRIPTION | LENGTH | WT. | PART NO. |
|---|--------|--------|----------|
| 1" Service Box Extension with 1 Set Screw | 3 in. | 1 lbs | 45594 |
| 1" Service Box Extension with 1 Set Screw | 6 in. | 1 lbs | 45595 |
| 1" Service Box Extension with 1 Set Screw | 9 in. | 2 lbs. | 45597 |
| 1" Service Box Extension with 1 Set Screw | 12 in. | 3 lbs. | 45600 |
| 1" Service Box Extension with 1 Set Screw | 18 in. | 4 lbs. | 45605 |
| 1" Service Box Extension with 1 Set Screw | 24 in. | 8 lb. | 45610 |
| 1" Service Box Extension with 2 Set Screws | 3 in. | 1 lbs | 45594 2 |
| 1" Service Box Extension with 2 Set Screws | 6 in. | 1 lbs | 45595 2 |
| 1" Service Box Extension with 2 Set Screws | 9 in. | 2 lbs. | 45597 2 |
| 1" Service Box Extension with 2 Set Screws | 12 in. | 3 lbs. | 45600 2 |
| 1" Service Box Extension with 2 Set Screws | 18 in. | 4 lbs. | 45605 2 |
| 1" Service Box Extension with 2 Set Screws | 24 in. | 8 lb. | 45610 2 |
| 1" Service Box Extension with 3 Set Screws | 3 in. | 1 lbs | 45594 3 |
| 1" Service Box Extension with 3 Set Screws | 6 in. | 1 lbs | 45595 3 |
| 1" Service Box Extension with 3 Set Screws | 9 in. | 2 lbs. | 45597 3 |
| 1" Service Box Extension with 3 Set Screws | 12 in. | 3 lbs. | 45600 3 |
| 1" Service Box Extension with 3 Set Screws | 18 in. | 4 lbs. | 45605 3 |
| 1" Service Box Extension with 3 Set Screws | 24 in. | 8 lb. | 45610 3 |
| 1¼" Service Box Extension with 2 Set Screws | 3 in. | 1 lbs | 45620 |
| 1¼" Service Box Extension with 2 Set Screws | 6 in. | 1 lbs | 45620 1 |
| 1¼" Service Box Extension with 2 Set Screws | 9 in. | 2 lbs. | 45620 2 |
| 1¼" Service Box Extension with 2 Set Screws | 12 in. | 3 lbs. | 45620 3 |
| 1¼" Service Box Extension with 2 Set Screws | 18 in. | 4 lbs. | 45620 4 |
| 1¼" Service Box Extension with 2 Set Screws | 24 in. | 8 lb. | 45620 5 |


SERVICE BOX ACCESSORIES

Service Box Tools

High Security Service Box Locking Device

The bronze Locking Device is placed on the service valve which prevents operation of the valve using a standard service box wrench. Because it's made of non-magnetic bronze, it can not be removed using a magnet.

To operate the service valve or to remove the locking device place the Extractor Tool down the service box and inset it into the Locking Device until the spring pin snaps into the spring pin hole.

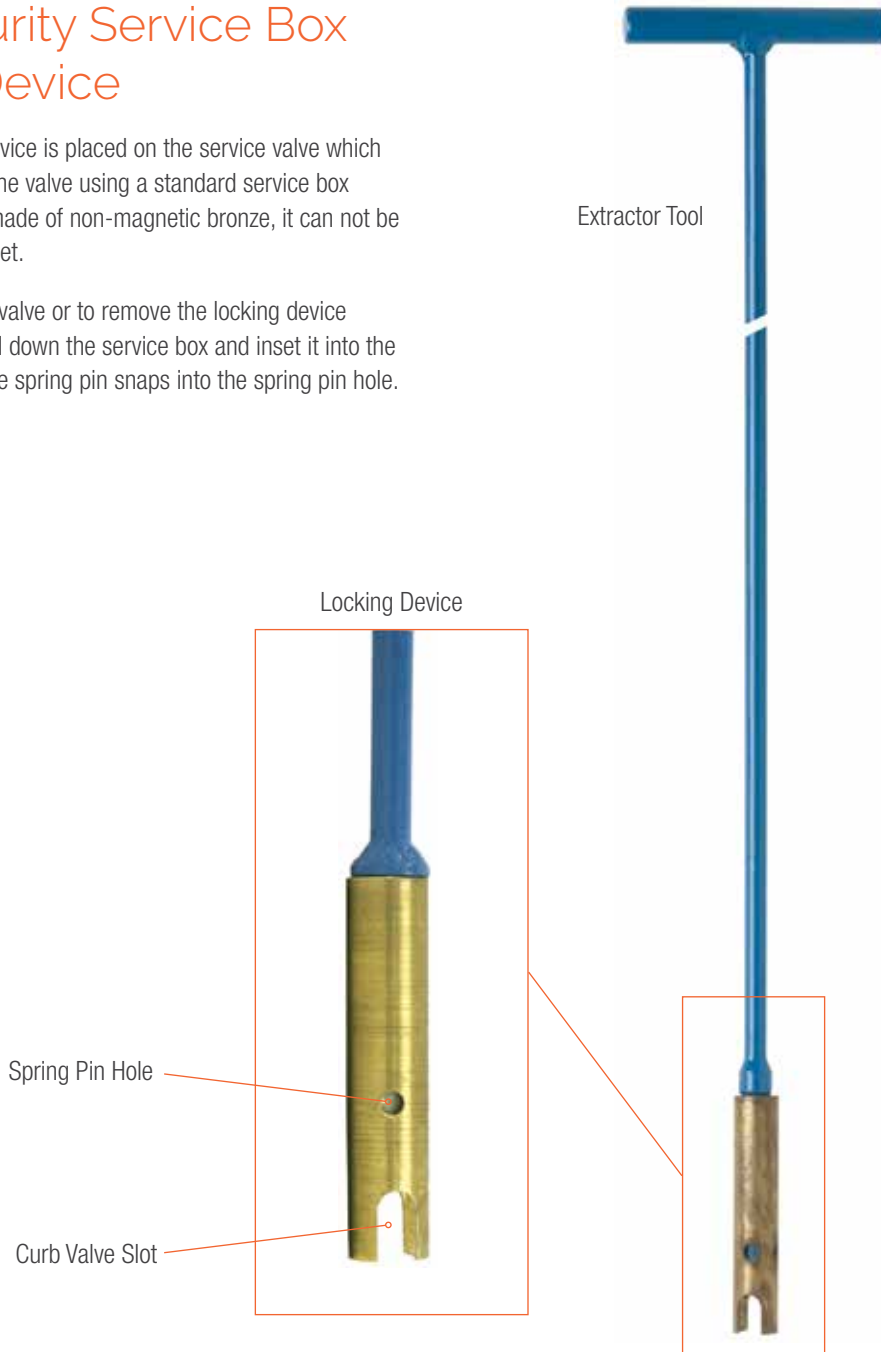

| PRODUCT DESCRIPTION | WT. | PART NO. |
|--------------------------------------|--------|----------|
| Service Box Locking Device | 1 lb. | 63278 |
| Service Box Locking Device Extractor | 2 lbs. | 63278 1 |